


- NOTES (UNLESS OTHERWISE SPECIFIED): (C)
- 1 RECOMMENDED MOUNTING:
M4 FASTENER WITH 6.00 IN-LB (7.00 KGF-CM) OF TORQUE MAXIMUM.
 - 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
 - 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
 - 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

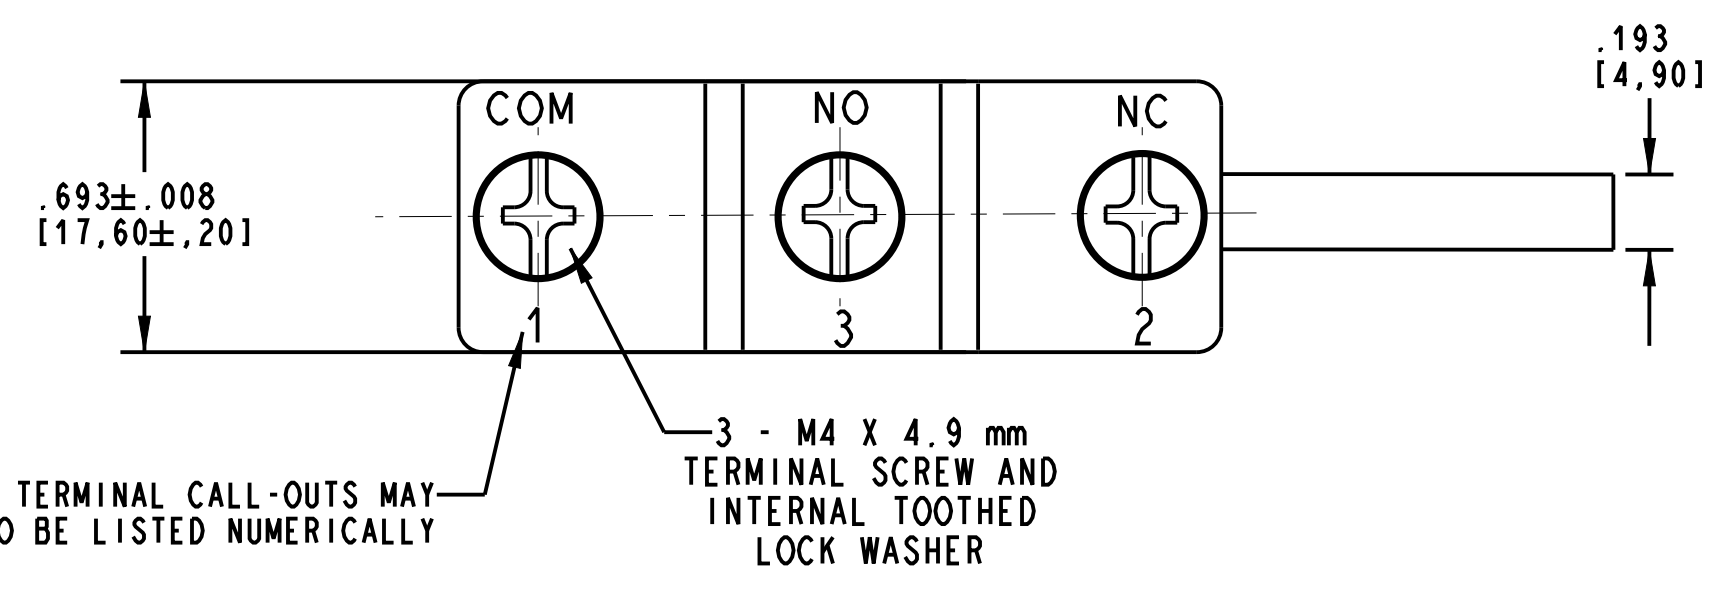

SWITCH CHARACTERISTICS	
ELECTRICAL RATING	20A 250VAC (cULus) T55°C
TERMINAL	SCREW
OPER. FORCE MAX.	80 GMS
RELEASE FORCE MIN.	14 GMS
PRETRAVEL MAX.	.394 [10.0 mm]
OVERTRAVEL MIN.	.220 [5.61 mm]
MOVE. DIFF. MAX.	.050 [1.27 mm]
OPERATING POSITION	.716 TO .780 [18.2 TO 19.8 mm]

DWN: TLM
APVD: S.G.
DATE: 16-JUN-05
THIRD ANGLE PROJECTION

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THEREIN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.

ZF ZF Electronic Systems
11200 88th AVE. PLEASANT PRAIRIE, WI 53158
NAME / DESCRIPTION
SPECIFICATION DRAWING

C	Z000359704	2016-04-21	TLM	ELL	PROJECT / CSR	DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO.	GPTBLS01
REV	ECO NO.	DATE	PREP	APVD	4000000138	INCHES	± .02	± .015	± 5 °	SCALE:	2:1	SH 1 OF 1

(C) ORIGINAL ON PRO/E