

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ELECTRICAL CHARACTERISTICS:

RATING TO BE MARKED ON HOUSING:

10A 125VAC
8A 250 VAC
1/4 HP 125/250VAC

B  10(4)A 250V~ T125/55

 12(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE:1500 VAC FOR 1 MINUTE
INSULATION RESISTANCE:100MΩ MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20mΩ MAX.
ELECTRICAL LIFE: 10,000 CYCLES

2. ILLUMINATION: 100-125VAC


3. COLORS: HOUSING - BLACK
ACTUATOR: RED.

4. TERMINAL (4): SOLDER TAG $.185+.004/-0.002$ [4,7+0,1/-0,05] WIDE
X $.031\pm0,001$ [0,8±0,03] THK.


SCALE 1:1


 **B**
MARKING

SWITCHING CIRCUIT



PANEL THICKNESS	DIM. X	DIM. Y
.030 TO .049 [0,75~1,25]	.756+.004/-0.000 [19,2+0,1/-0,0]	.508+.006/-0.000 [12,9+0,15/-0,0]
.049 TO .079 [1,25~2,0]	.764+.004/-0.000 [19,4+0,1/-0,0]	.508+.006/-0.000 [12,9+0,15/-0,0]
.079 TO .118 [2,0~3,0]	.780+.004/-0.000 [19,8+0,1/-0,0]	.508+.006/-0.000 [12,9+0,15/-0,0]

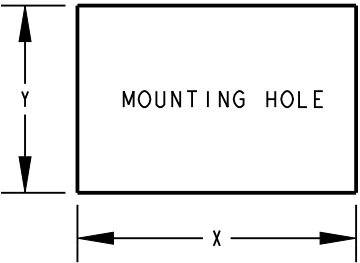

DWN: JPD
APVD: ELL
DATE: 11-Dec-17
THIRD ANGLE PROJECTION


CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. LRA32H2FBRLN

SCALE: 3:1 SH 1 OF 1

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °

B	Z000686755	2023-04-25	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD
				N/A