





DETAIL A
SCALE 3:1



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING: TO BE MARKED ON HOUSING
16A, 125VAC
10A, 250VAC
UL ENDURANCE RATING: 6000 CYCLES
2. INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
3. INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)
4. DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.
5. OPERATION TEMPERATURE: -25°C TO +85°C
6. WATERPROOF: IP65 CAPABLE
7. ACTUATOR: GREEN CLEAR PC (94-V2).
8. LIGHTED: DEPENDENT; NEON BULB RATED AT 220VAC.
9. TERMINALS: .031 $\pm$.001[0,8 $\pm$ 0,03] X .189 $\pm$.004[4,8 $\pm$ 0,11]
HOLE ϕ .055 $\pm$.008[1,4 $\pm$ 0,2].
10. WATERPROOF RUBBER: BLACK SILICONE.
11. HOUSING: BLACK, NYLON 66 (94-V2).

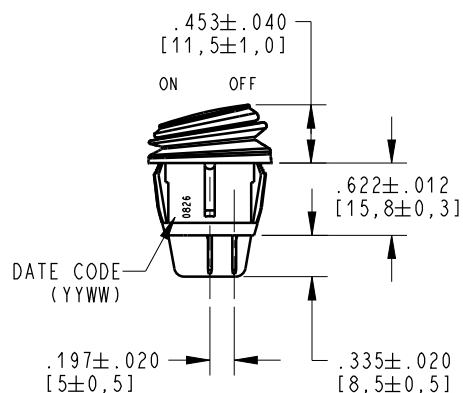

SCALE 3:2

MOUNTING HOLES

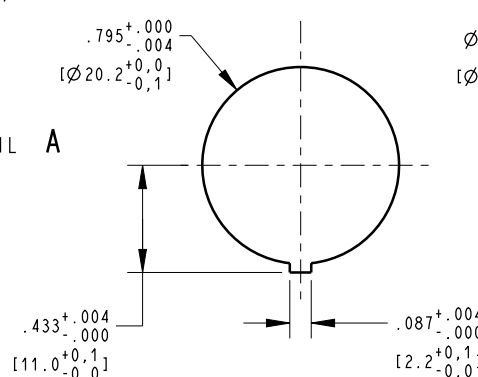


FIG. 1
SCALE 2:1


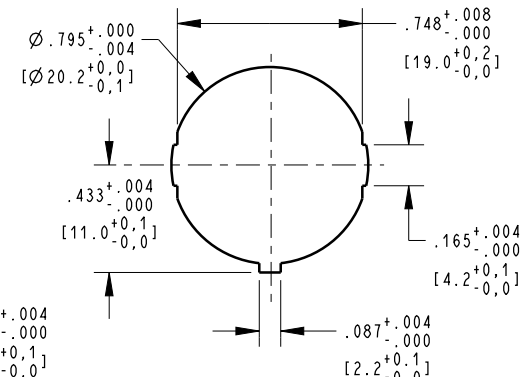


FIG. 2
SCALE 2:1

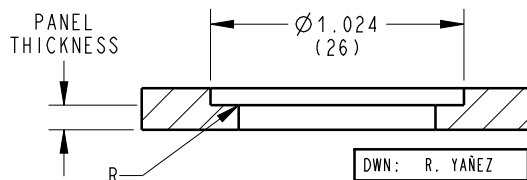

MOUNTING HOLES	
FIG.	PANEL THICKNESS
1	.059 TO .098 [1.5 TO 2.5]
2	.028 TO .098 [0.7 TO 2.5]

D	Z000431981	15-Nov-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: R. YANEZ
APVD: E. LESLIE
DATE: 07-Mar-14

THIRD ANGLE PROJECTION

PROJECT/ CSR
N/A

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KD-DPST ON-OFF LIGHTED

B ITEM NO. KDH3AEA2GBB

SCALE: 1:1 SH 1 OF 1