

8 7 6 5 4 3 2 1

F
E
D
C
B
A







F
E
D
C
B
A

NOTES (UNLESS OTHERWISE SPECIFIED):

1. RATING TO BE MARKED ON HOUSING: 10A 125 VAC
 10A 125VAC
6A 250VAC

 10(4)A 250V~ T125/55

 10(4)A 125/250V~ T55
2. DIELECTRIC STRENGTH: 1,000 VAC FOR 1 MINUTE
3. INSULATION RESISTANCE: 100 MΩ MIN. AT 500 VDC
4. INITIAL CONTACT RESISTANCE: 20 mΩ MAX.
5. ELECTRICAL LIFE: 50,000 CYCLES
6. ACTUATOR COLOR: RED
7. TERMINALS: .185+ .004/- .002 [4,7+0,1/-0,05] WIDE X .031±.001 [0,8±0,03] THICK, HOLE DIAMETER .063 [1,6].
8. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWITERS LABORATORIES, INC.

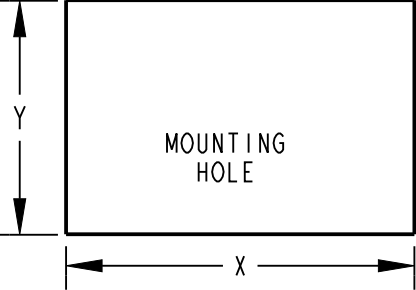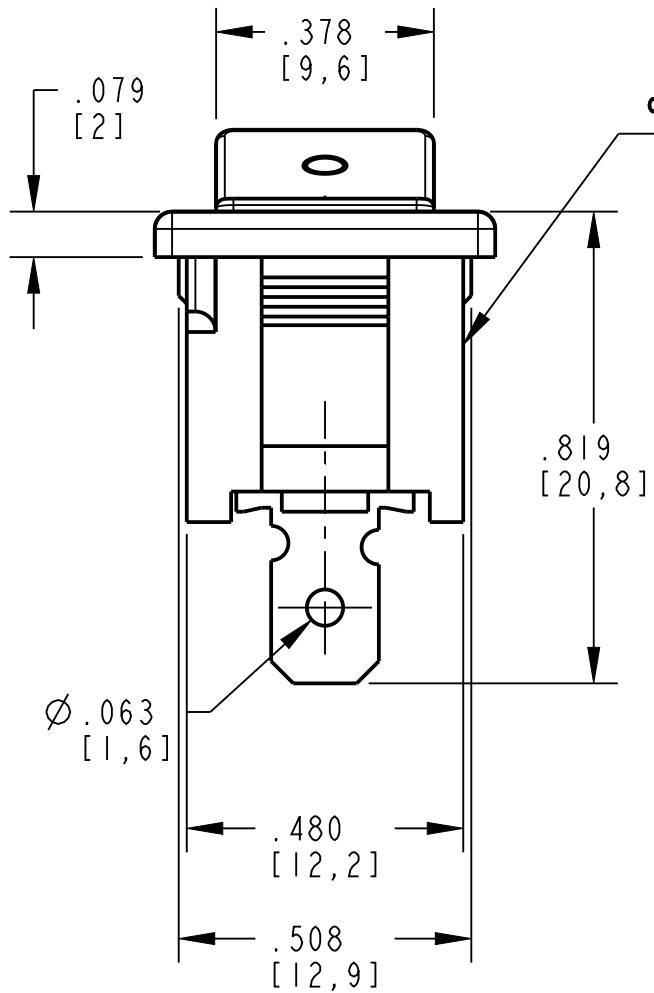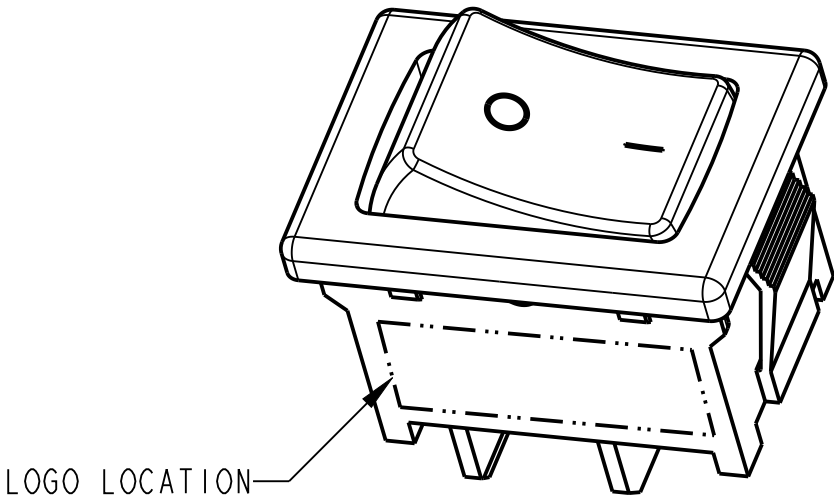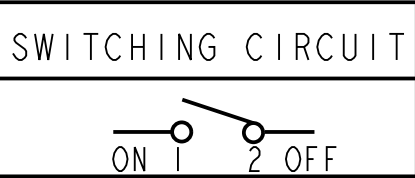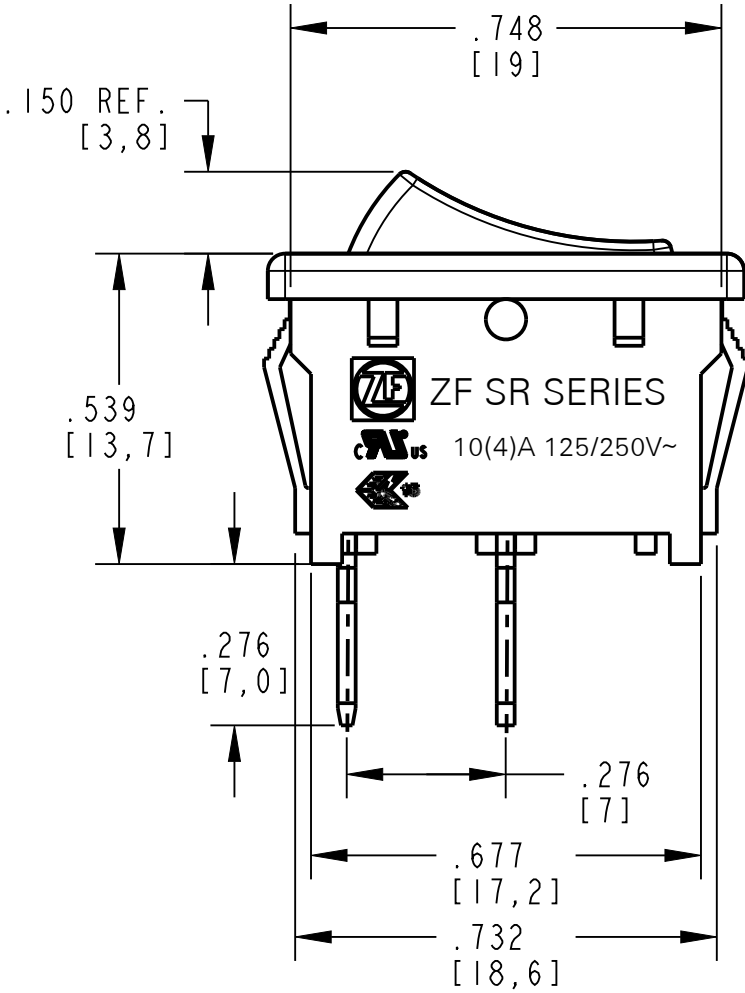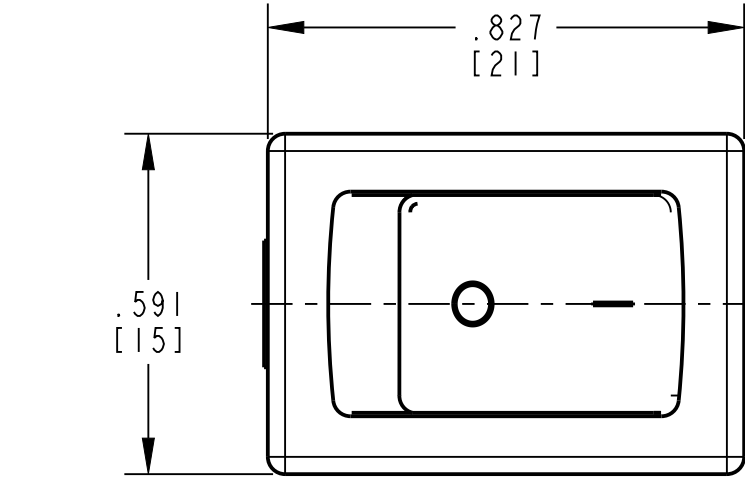

Z = PANEL THICKNESS


DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0,75 TO 1,25]	.756+ .004/- .000 [19,2+0,1/-0,0]	.508+ .006/- .000 [12,90+0,15/-0,0]
.049 TO .079 [1,25 TO 2,0]	.764+ .004/- .000 [19,4+0,1/-0,0]	.508+ .006/- .000 [12,90+0,15/-0,0]
.079 TO .118 [2,0 TO 3,0]	.780+ .004/- .000 [19,8+0,1/-0,0]	.508+ .006/- .000 [12,90+0,15/-0,0]

DWN: TLM

APVD: SG

DATE: 28-Apr-06

THIRD ANGLE PROJECTION



PROJECT/ CSR

N/A

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THEREIN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °

 **ZF Electronic Systems**

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SR ROCKER

B ITEM NO. SRB22A2FBRNN

SCALE: 3:1 SH 1 OF 1

J	Z000435630	07-Dec-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

8 7 6 5 4 3 2 1