
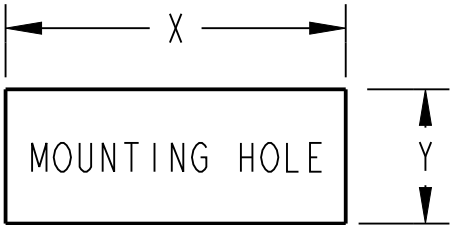

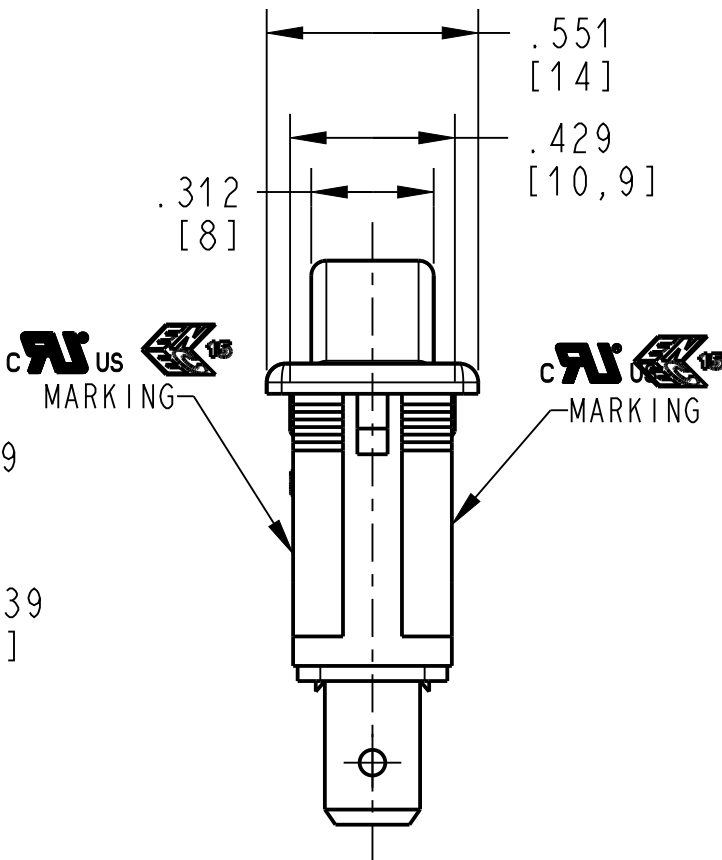
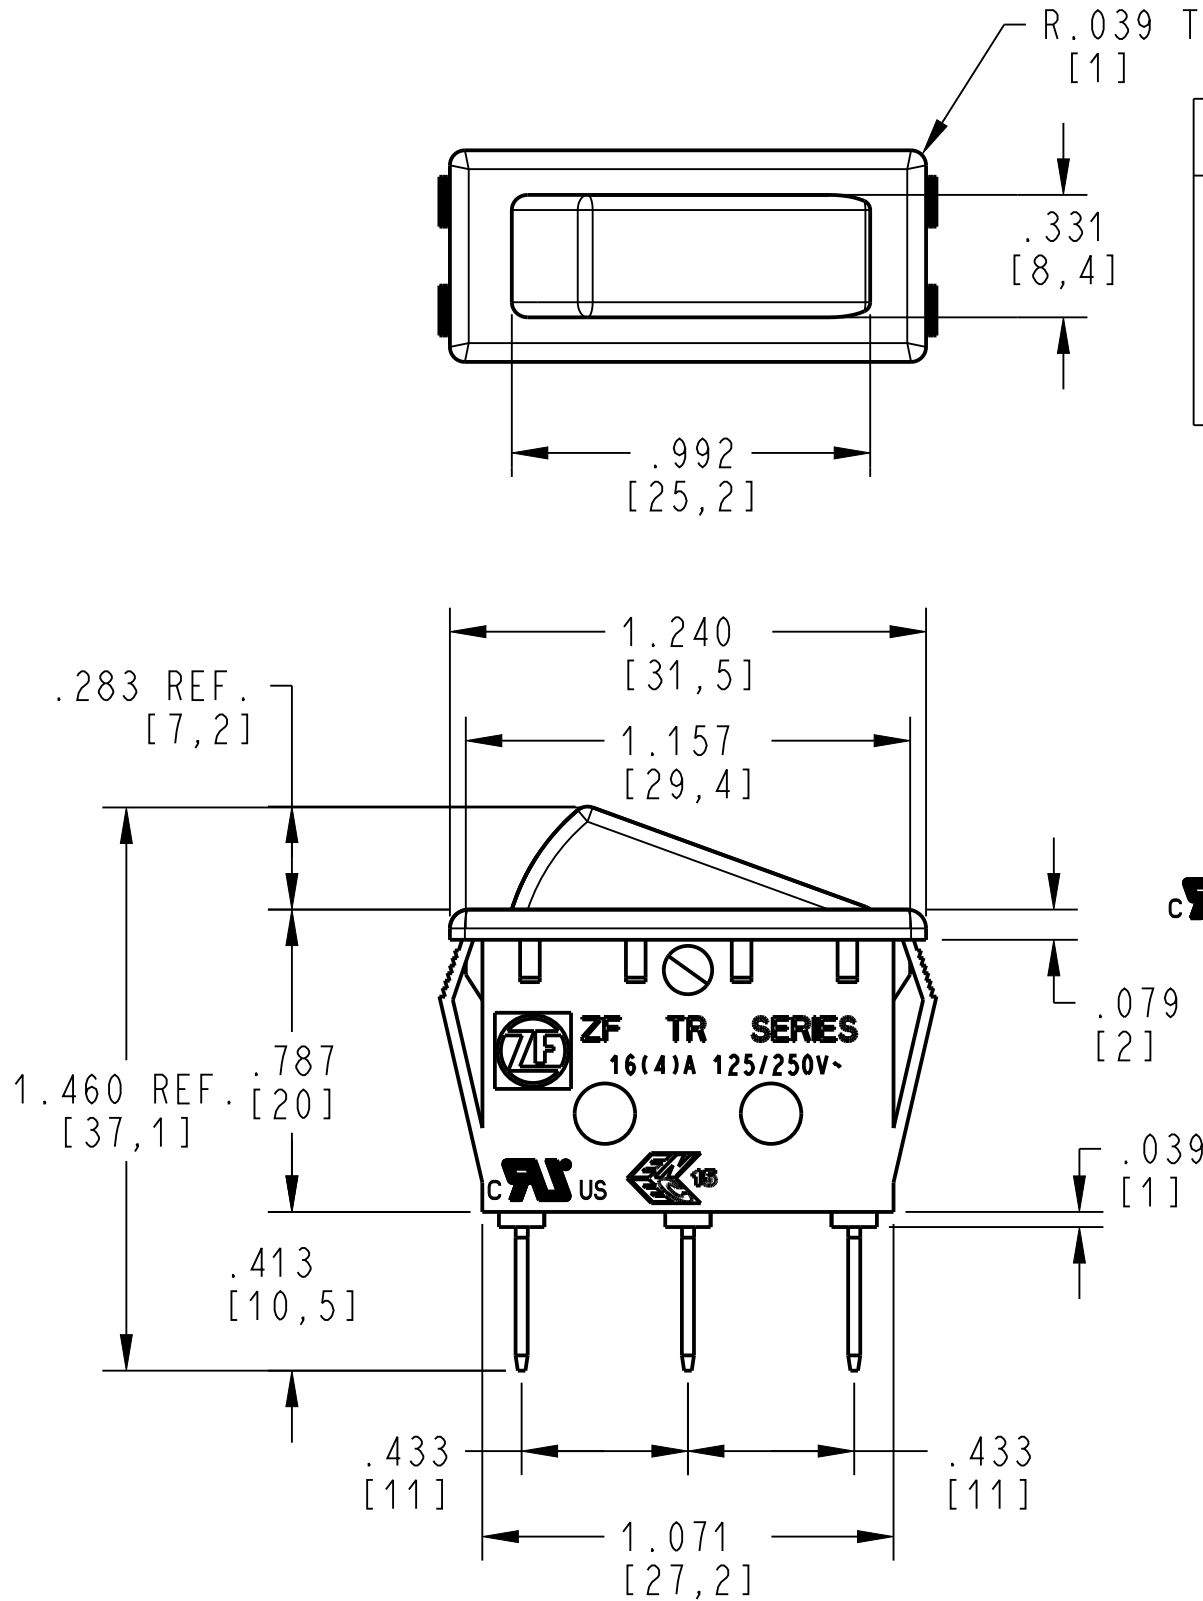


NOTES: (UNLESS OTHERWISE SPECIFIED):

1. RATING TO BE MARKED ON ROCKER:
16A 125VAC 1/4HP
16A 250VAC 1/4HP
3/4HP 250 VAC

16(4)A 250V~T85/55 10E3
16(4)A 125/250V~


2. DIELECTRIC WITHSTAND VOLTAGE: 1,500 VAC FOR 1 MINUTE.
INSULATION RESISTANCE:100MΩ MIN AT 500 VDC
INITIAL CONTACT RESISTANCE:20mΩ (MAX.)
3. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.
4. MAINTAINED SWITCH SHOWN IN THE NORMALLY OPEN POSITION
5. TERMINALS (3): .248+.004/- .002[6,3+0,1/-0,05]
X .031±.001[0,8±0,03] QUICK CONNECT
HOLE DIAMETER .067±.004[1,7±0,1].
6. ILLUMINATION: 250 VAC

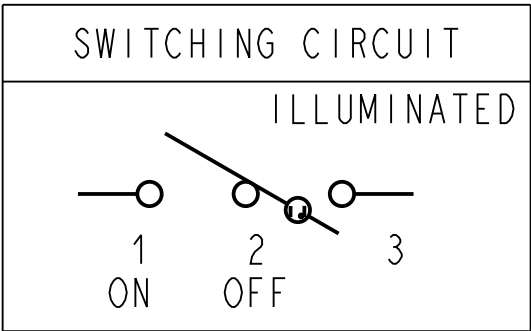

DIM. X	DIM. Y	Z= PANEL THICKNESS
1.181+.004/- .000 [30.0+0.1/-0.0]	.433+.004/- .000 [11.0+0.1/-0.0]	.030 TO .049 [0.75 TO 1.25]
1.189+.004/- .000 [30.2+0.1/-0.0]	.433+.004/- .000 [11.0+0.1/-0.0]	.049 TO .079 [1.25 TO 2.00]
1.200+.004/- .000 [30.5+0.1/-0.0]	.433+.004/- .000 [11.0+0.1/-0.0]	.079 TO .118 [2.0 TO 3.0]

DWN: E. LESLIE
APVD: E. LESLIE
DATE: 2025-06-25

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.

TOLERANCE UNLESS SPECIFIED
DWG UNITS X.XX X.XXX ANGLES
INCH ± 0.02 ± 0.012 ± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME/ DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. TRG22F2BBREN

SCALE: 1:1 SH 1 OF 1

L		2025-06-25	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD