
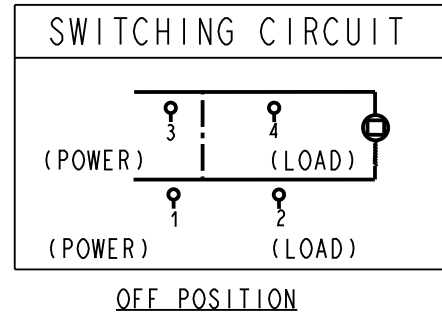




NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING TO BE MARKED ON HOUSING:
10A, 125 VAC; 6A, 250 VAC US
1/2 HP, 125/250 VAC US

U.L. ENDURANCE RATING 6000 CYCLES.

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)

INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)

DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE

WATERPROOF: IP65 CAPABLE



OPERATION TEMPERATURE: -25°C TO +85°C

ACTUATOR: GREEN CLEAR

LIGHTED: DEPENDANT, NEON BULB RATED AT 220 VAC

TERMINALS: SILVER PLATED, COPPER ALLOY #4 TERMINAL
(FOR LAMP) IS CLEAN BRASS.

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

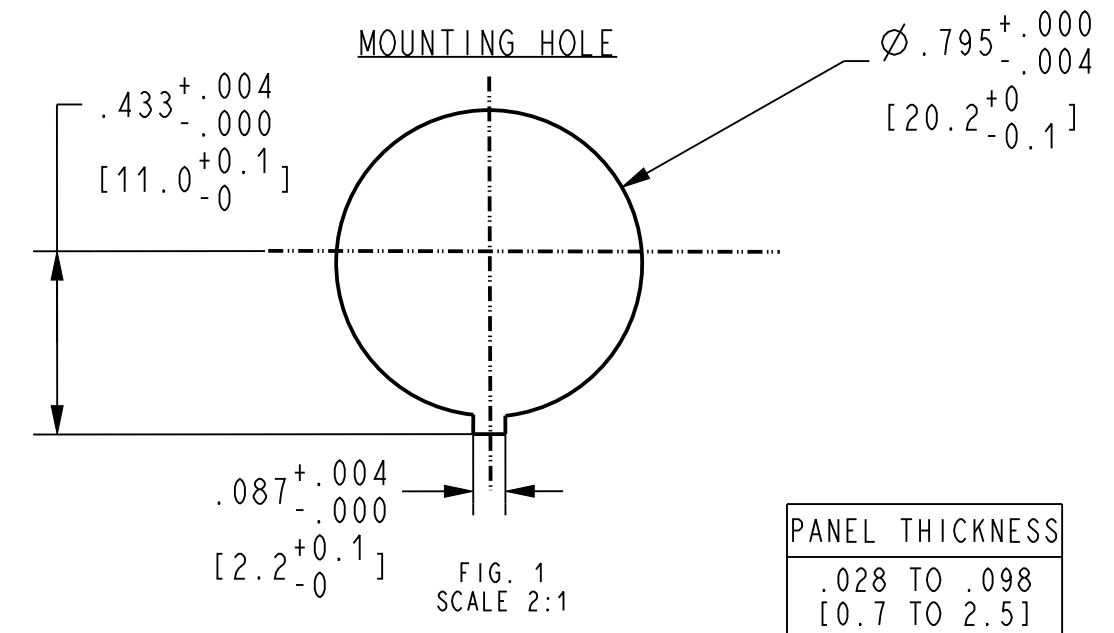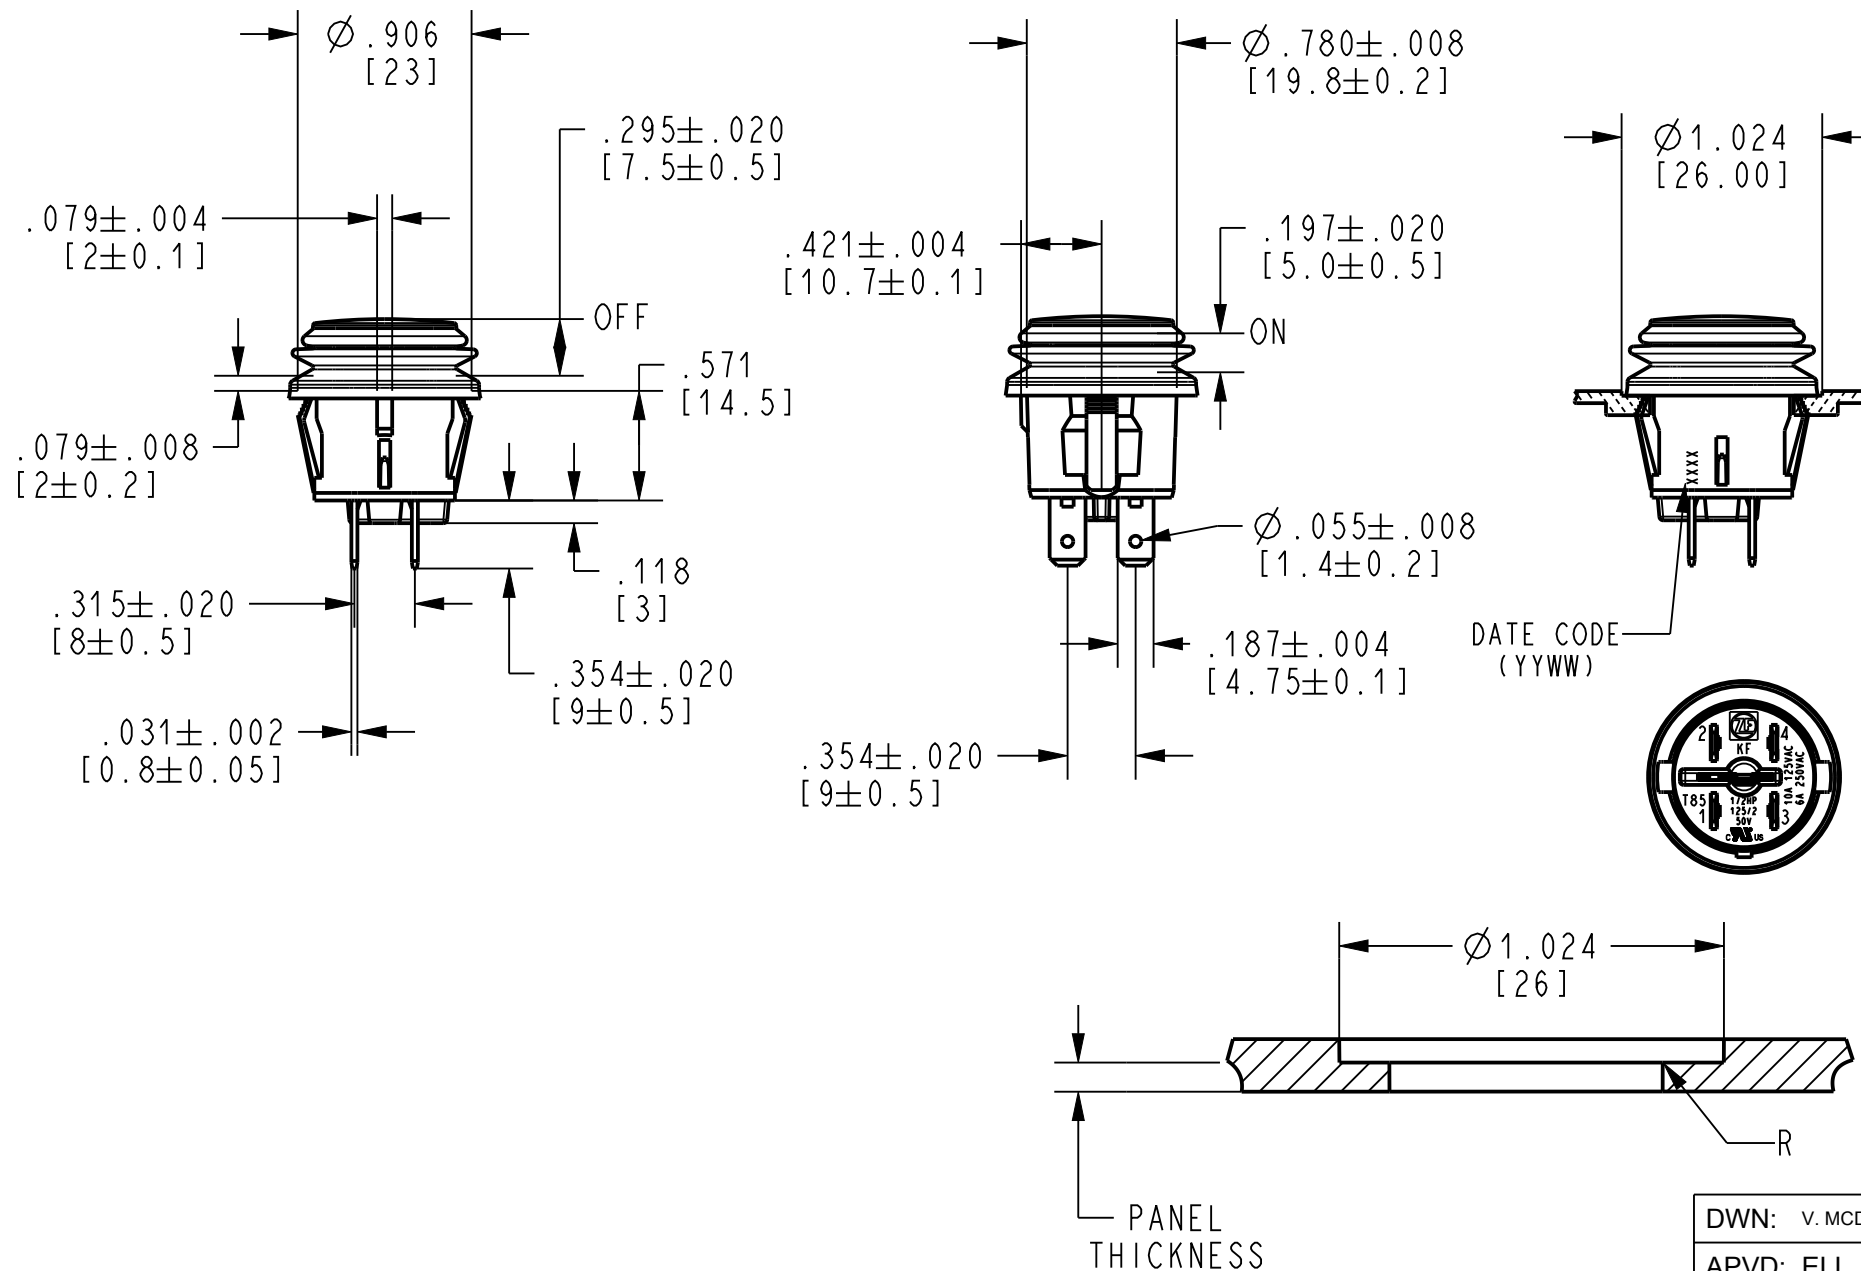


PANEL THICKNESS
.028 TO .098 [0.7 TO 2.5]

DWN: V. MCDOWELL

APVD: ELL

DATE: 2014-12-10

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES [mm]	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

KF-DPST ON-OFF LIGHTED

ITEM NO. KFB3AEA2GGBB

SCALE: 1:1 SH 1 OF 1

C	Z000374405	16-Aug-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD