




NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: 10A, 125 VAC; 6A, 250 VAC 
1/2 HP, 125/250 VAC 

20A, 14VDC, 10A 28VDC
(NOT AGENCY APPROVED FOR DC)

U.L. ENDURANCE RATING 6000 CYCLES.

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)



INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)

DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.

WATERPROOF: IP65 CAPABLE

OPERATION TEMPERATURE: -25°C TO +85°C

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

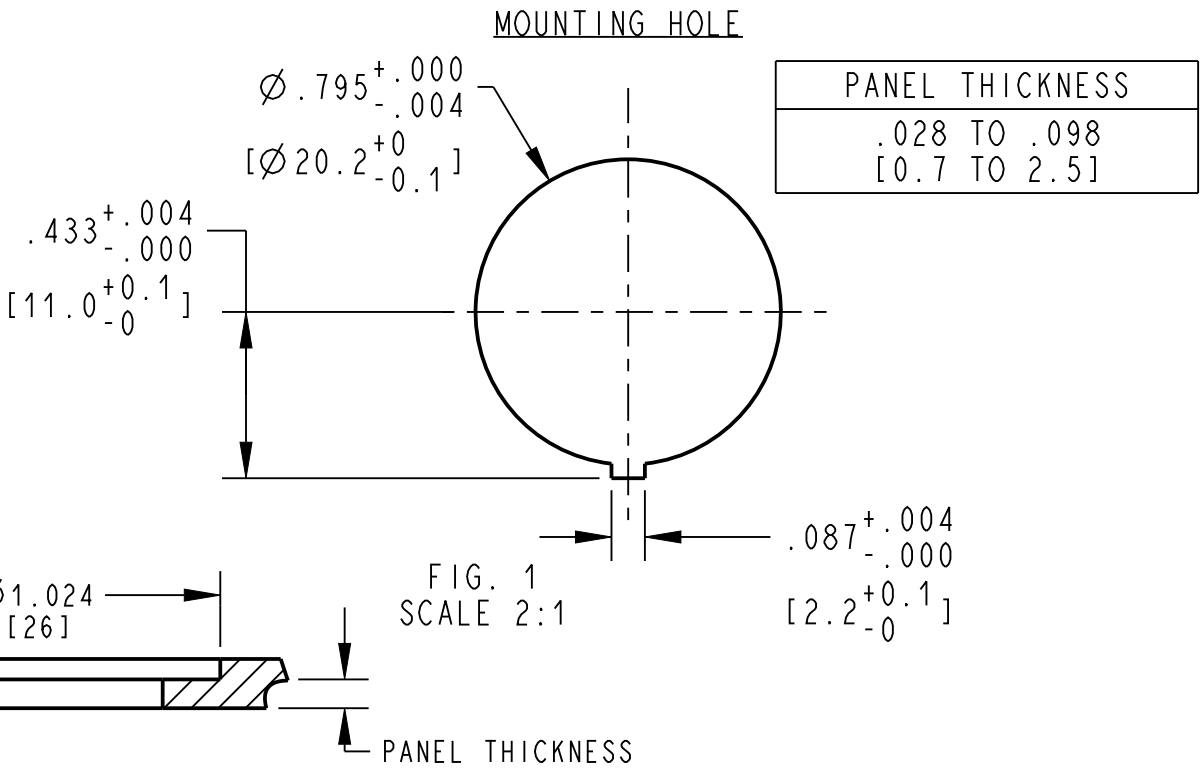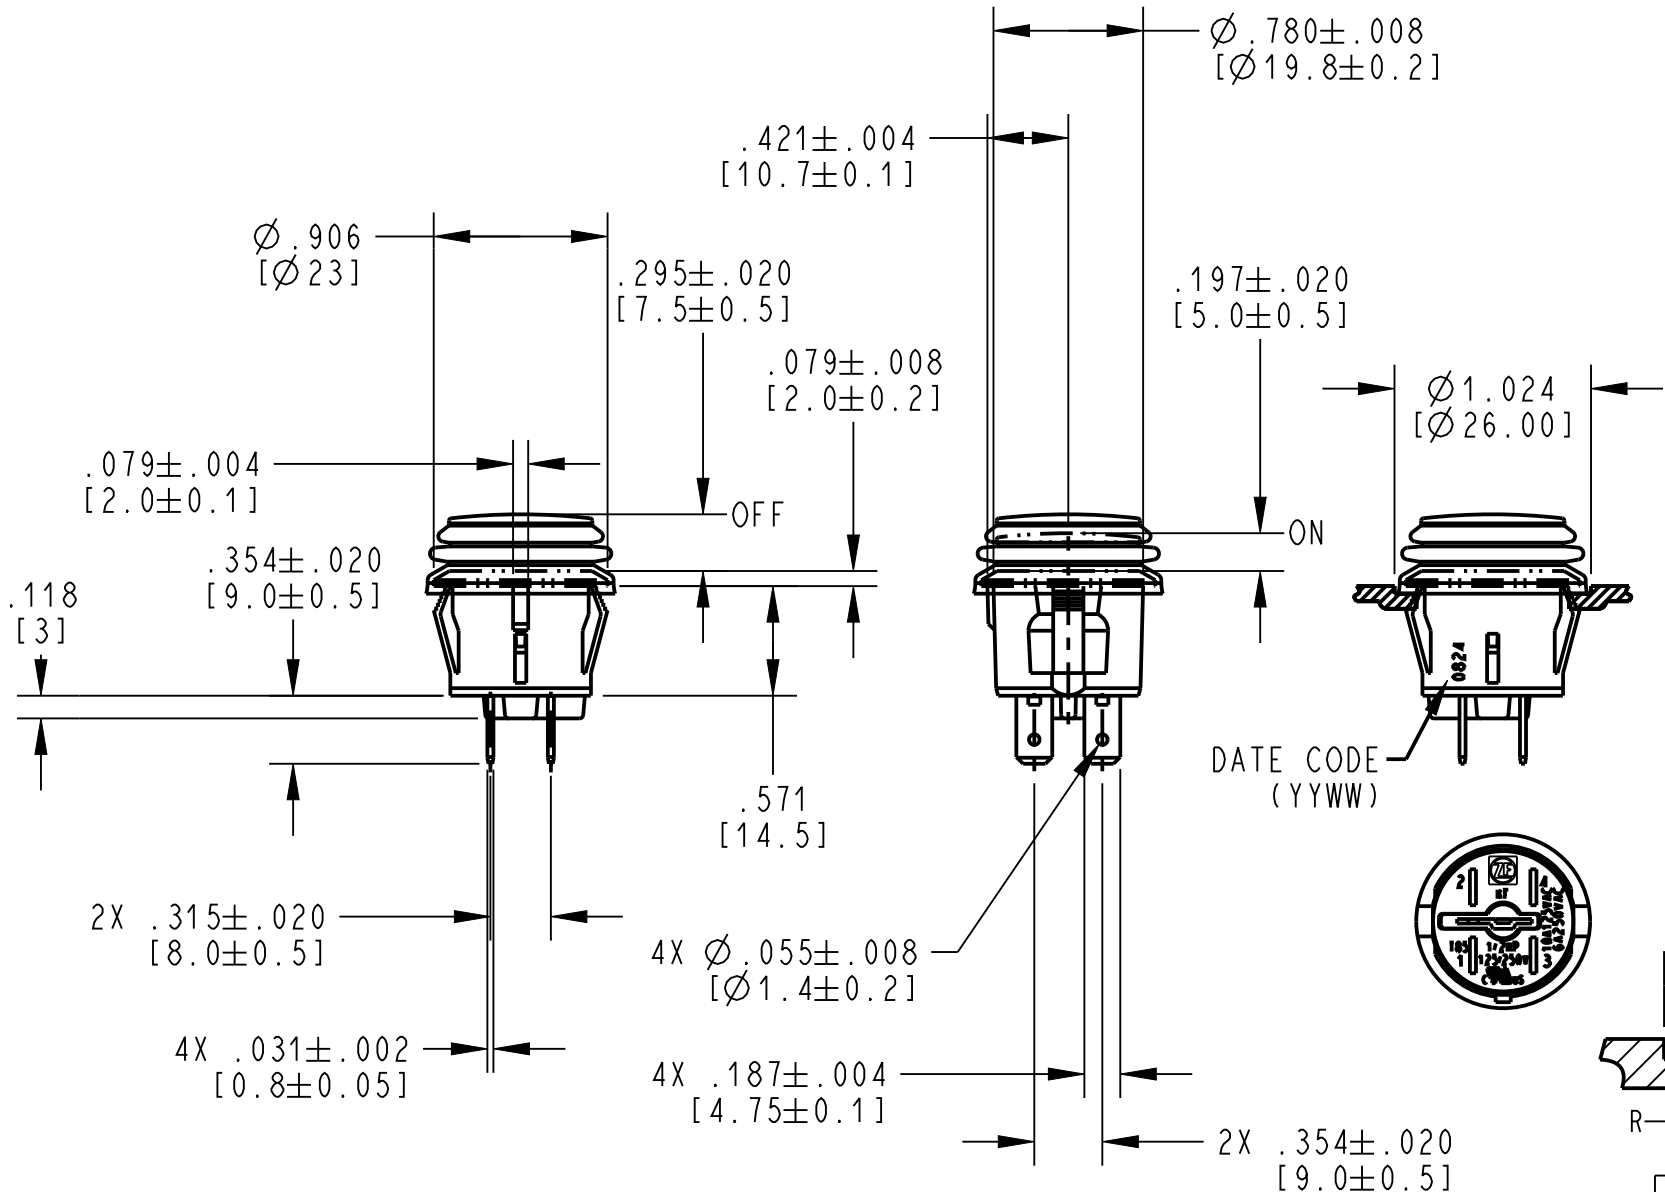


DWN: C. RAMOS

APVD: J. RUMMELHART

DATE: 17-Jun-08

THIRD ANGLE PROJECTION



G	Z000374405	16-Aug-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
4000000138

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH [mm]	± 0.02	± 0.012	± 5 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

KF-DPST ON-OFF NON-LIGHTED

B ITEM NO. KFB3ANA1BBB

SCALE: 1:1 SH 1 OF 1