
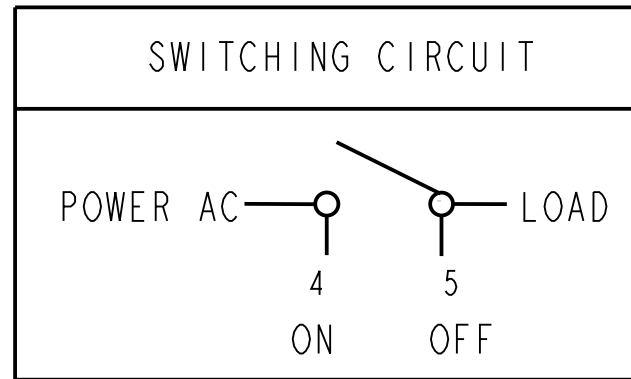


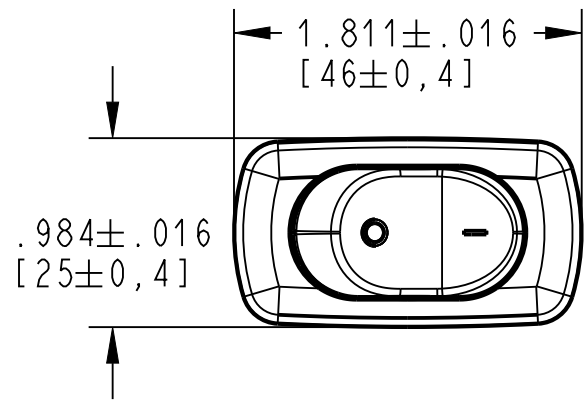




RATING: 16A 125VAC, 10A 277 VAC 
3/4 HP, 125/277 VAC 

- (F) UL ENDURANCE RATING: 6000 CYCLES
- INITIAL CONTACT RESISTANCE: 50 mΩ (MAX)
- (F) INSULATION RESISTANCE: 500VDC 100 MΩ (MIN)
- DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56 CAPABLE


RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

DATE CODE FORMAT: YYWW

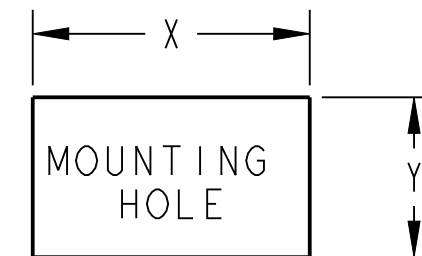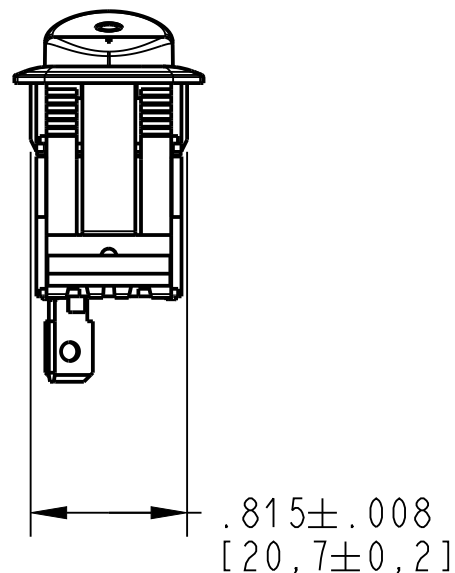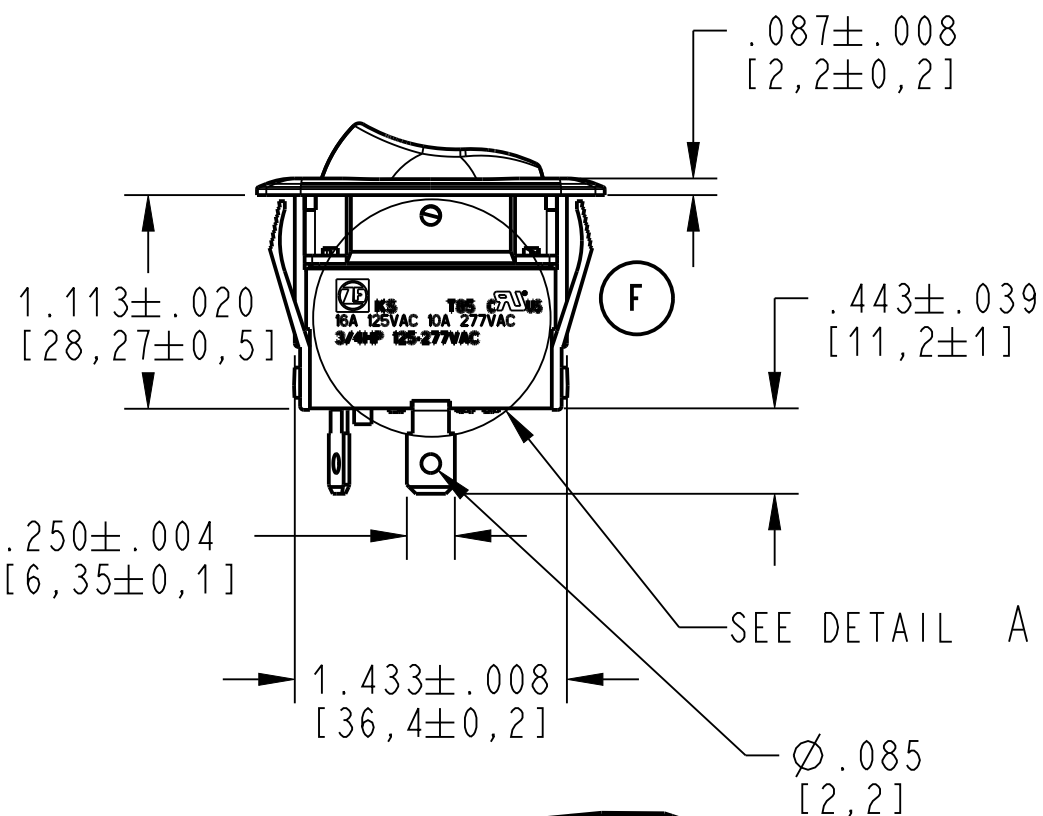


Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0.75 TO 1.25]	1.441±.004 [36.6±0.1]	.835±.004 [21.2±0.1]
.049 TO .079 [1.25 TO 2.00]	1.449±.004 [36.8±0.1]	.835±.004 [21.2±0.1]
.079 TO .118 [2.00 TO 3.00]	1.457±.004 [37.0±0.1]	.835±.004 [21.2±0.1]

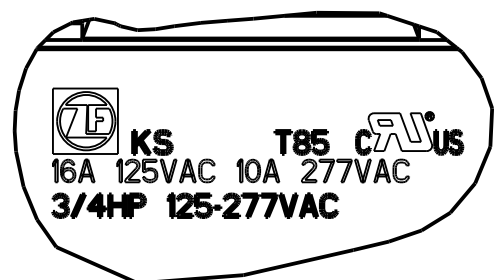

DETAIL A
SCALE 2:1

DWN: J DOLNIK
APVD: JR
DATE: 20-May-08
THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

KS-SPST ON-OFF NON-LIGHTED

B ITEM NO. KSF2ANB1BBD

SCALE: 1:1 SH 1 OF 1

F	Z000374409	22-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
4000000138

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5 °