
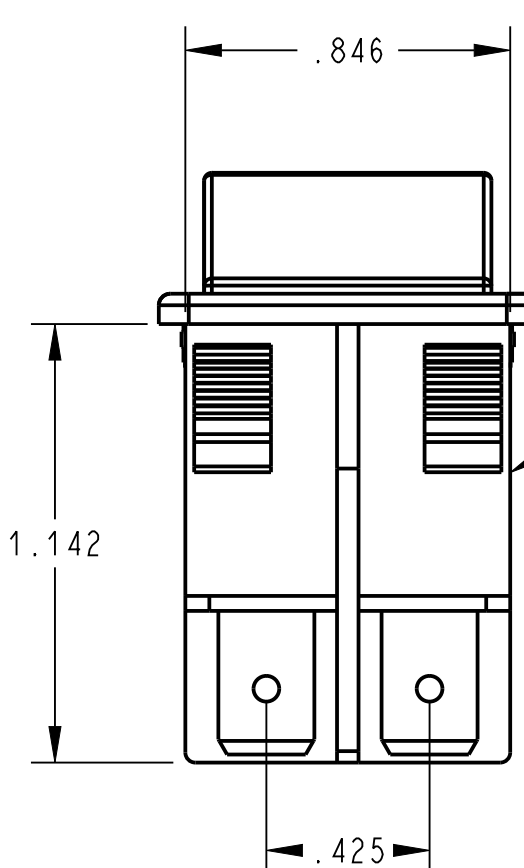
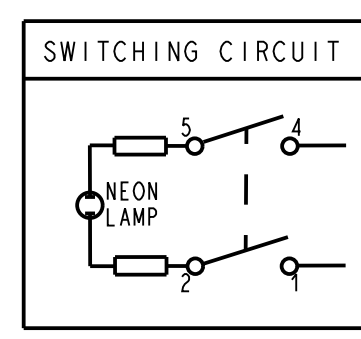
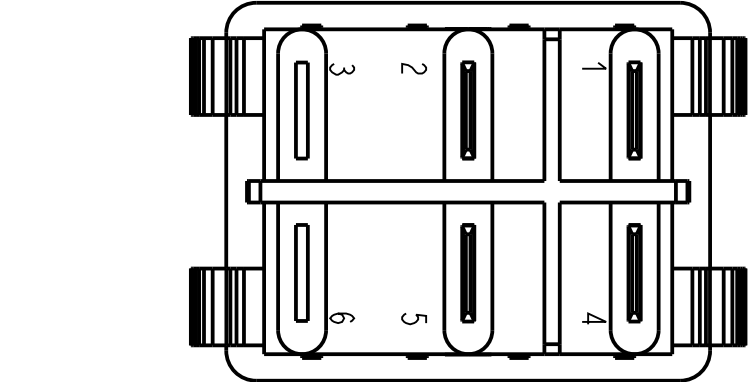
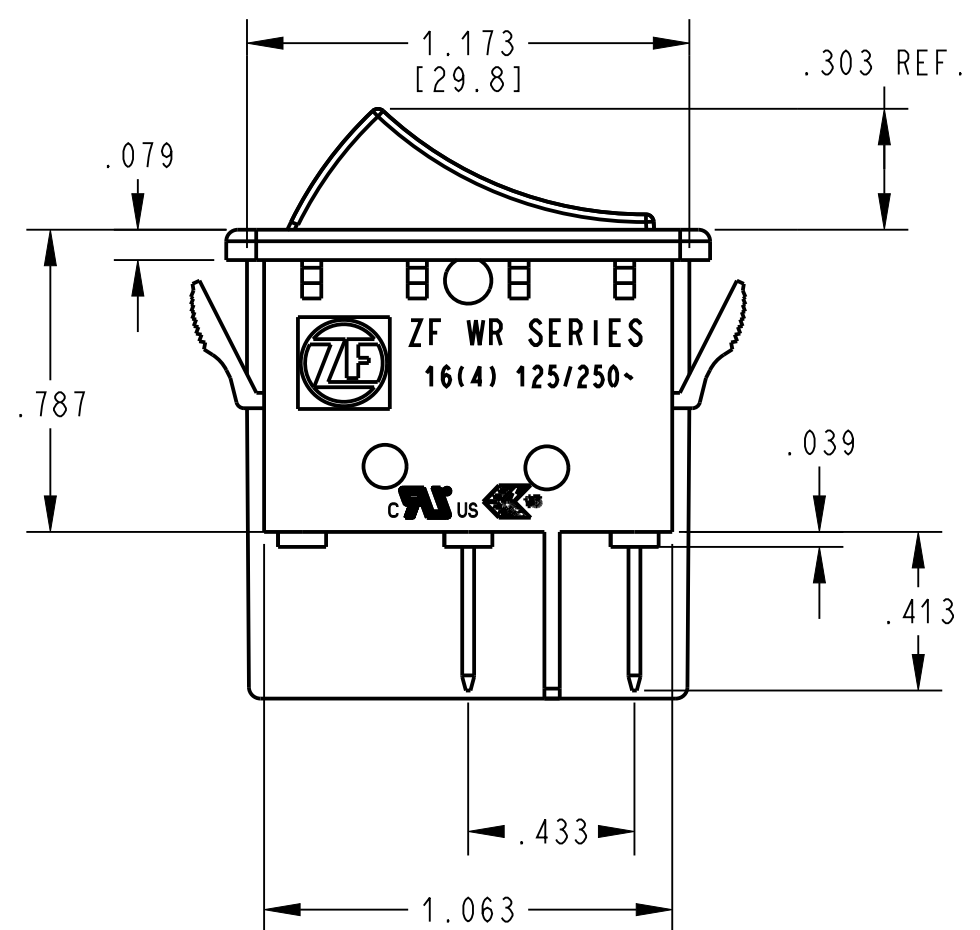


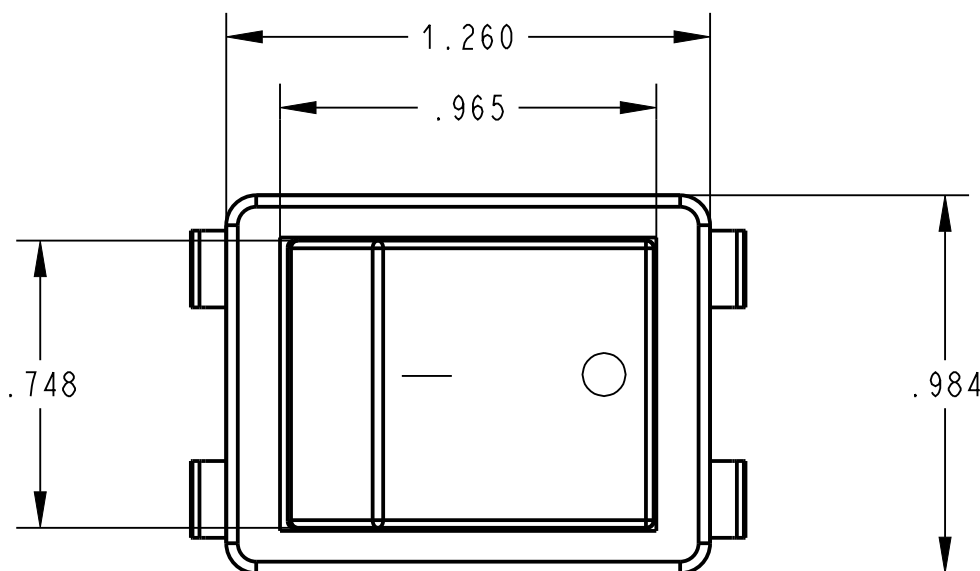

NOTES: (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKERS:
16A, 125/250 VAC 1/4HP
16A, 250VAC 1/4HP
3/4HP 250 VAC.

(H) 16(4)A, 250VAC T125/55 10E3


16(4)A 125/250V~

ILLUMINATED: 220 VAC COLOR: RED.


DIELECTRIC WITHSTAND VOLTAGE: 1000VAC FOR 1 MINUTE.
INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20m Ω MAX.

TERMINALS: .031 $\pm$.002[0.8 $\pm$ 0.03]X.248+.004/- .002[6.3+0.1/-0.05]
HOLE $\varnothing$.067 $\pm$.004[1.7 $\pm$ 0.1]


MARKING

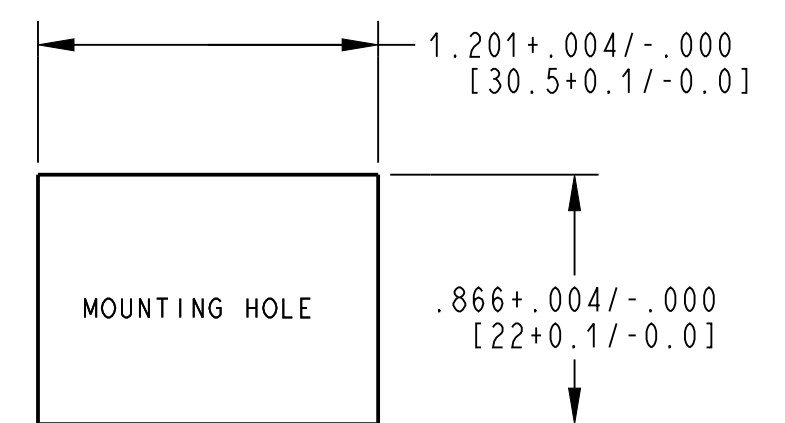

RECOMMENDED PANEL THICKNESS
.030 TO .049



SCALE 1:1

DWN: TLM		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION SPECIFICATION DRAWING							
APVD: ELL									
DATE: 11-OCT-12									
THIRD ANGLE PROJECTION									
									
TOLERANCE UNLESS SPECIFIED									
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES	B		ITEM NO. WRG32F2FBRLN	
INCH		FALSE	± 0.02	± 0.012	± 5.0 °	SCALE: 2:1		SH 1 OF 1	

H	Z000724324	2024-02-29	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD