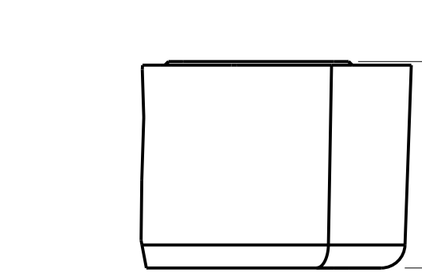

DETAIL B
SCALE 4:1

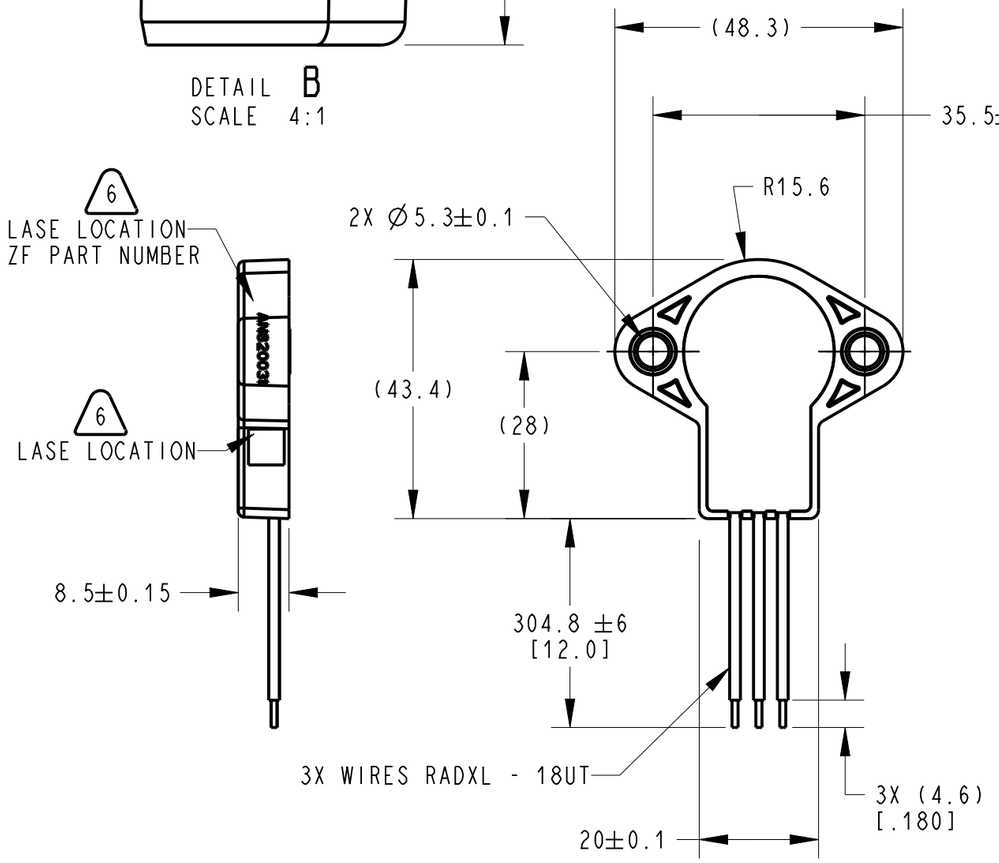

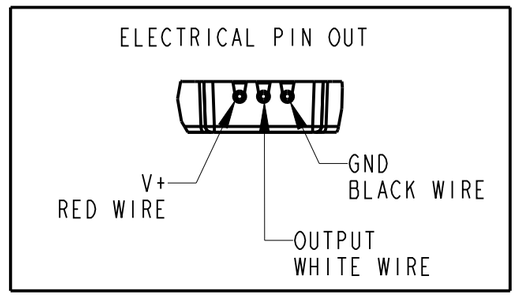

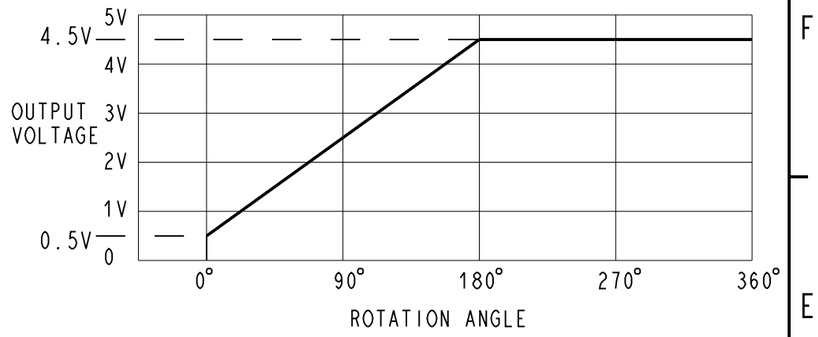

SENSOR OUTPUT SIGNAL
(TYPICAL BASED ON 5V SUPPLY)

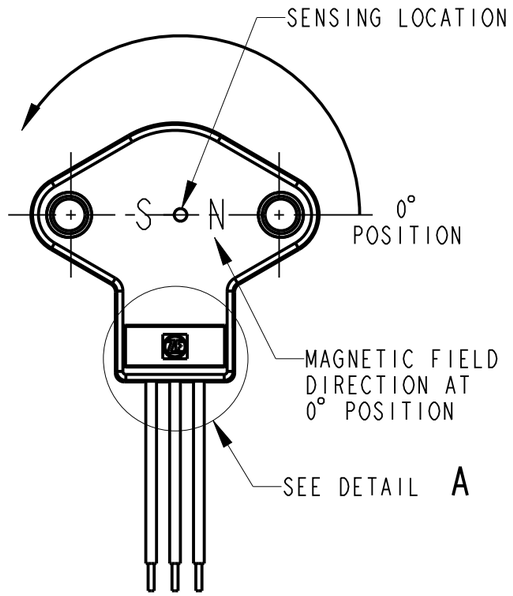

BACK VIEW

NOTES:

1. RECOMMENDED FASTENER: M5 SCREW
2. RECOMMENDED TORQUE: 3.96 N.m [35 lbs.in] (CLASS 5.8, DRY)
3. REFERENCE ZF ELECTRONIC SYSTEMS PRODUCT SPECIFICATION PSPEC-00077 FOR PRODUCT CHARACTERISTICS NOT SPECIFIED ON THIS DRAWING
4. ALL SENSOR'S ARE 100% FUNTIONALLY TESTED.
5. OPERATING TEMPERATURE RANGE: -40°C TO +150°C
6. (D) LASE MARKING INFORMATION:
   AN820031 MEXICO
   ZF DATE CODE AND TESTER I.D.
   (YR/WK/-A, B OR C)
   SERIAL NUMBER (4 DIGITS)
7. RoHS COMPLIANT PART.

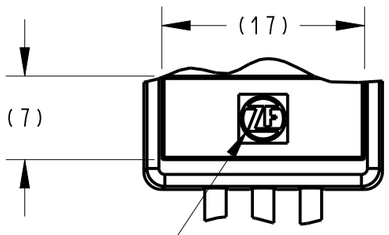

DETAIL A
SCALE 2:1

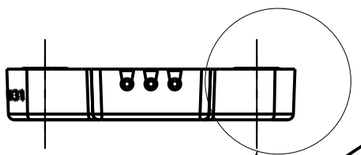

SEE DETAIL B

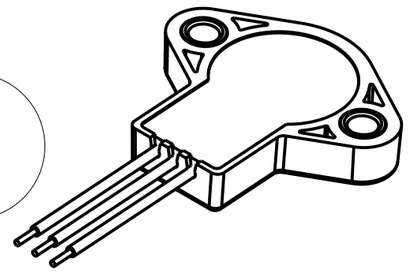

TRIMETRIC VIEW

REV	ECO NO.	DATE	PREP	APVD
D	Z000522920	2019-10-09	RJC	TB

DWN: C RAMOS
APVD: T BURNETT
DATE: 07-NOV-08
THIRD ANGLE PROJECTION
PROJECT/ CSR

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
MM	± 0.30	± 0.100	± 1.0 °

(D)
ZF Electronic Systems
PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION
AN8 W/WIRES 180 DEGREES

B ITEM NO. AN820031
SCALE: 1:1 SH 1 OF 2

ORIGINAL ON PRO/E

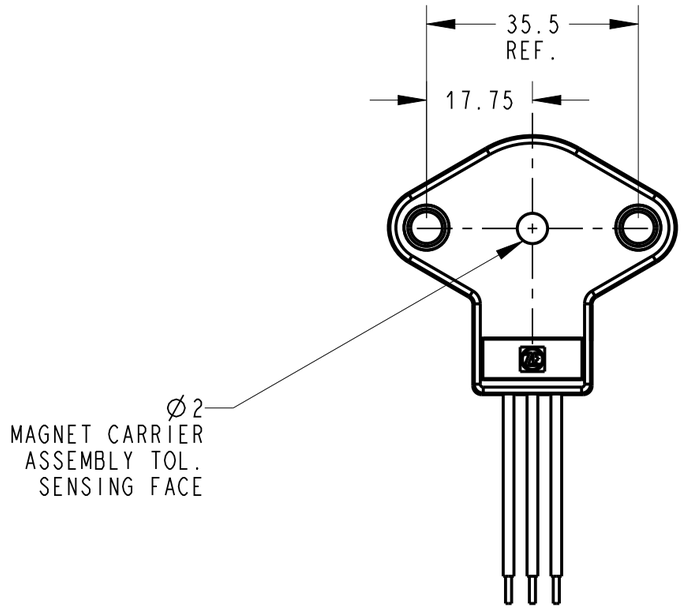



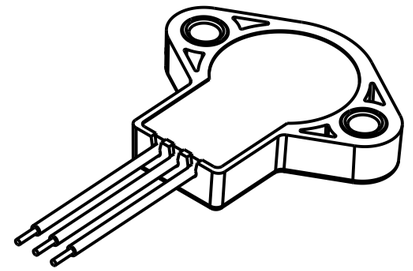

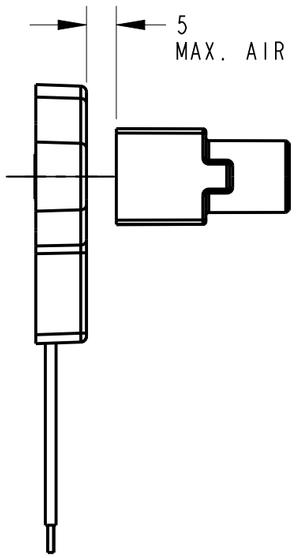

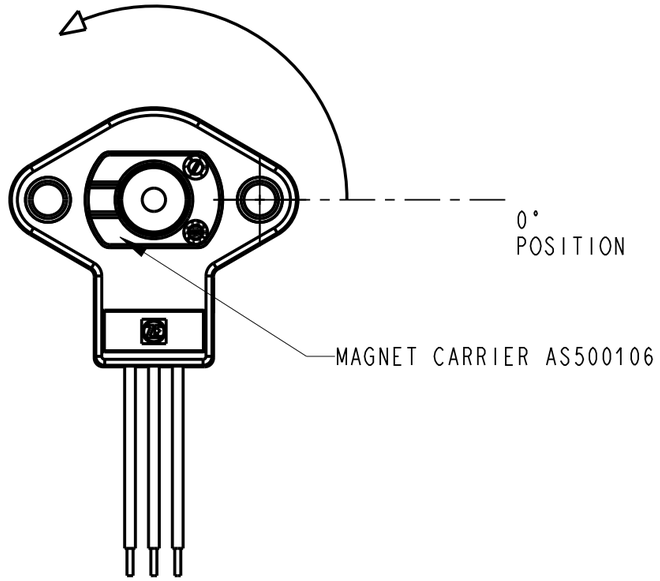

NOTES:
1. AS500106 (FOR REFERENCE ONLY) NOT INCLUDED WITH THIS PRODUCT

ORIGINAL ON PRO/E

D

ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

B	ITEM NO. AN820031	
	REV: D	SH 2 OF 2