

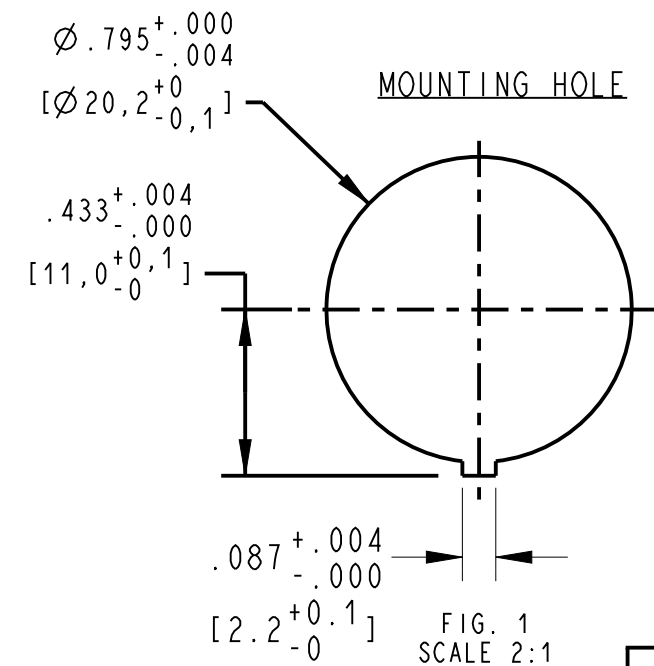

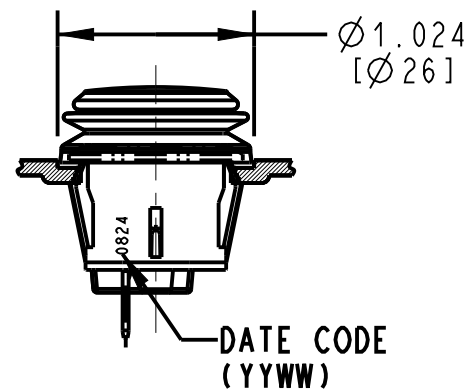
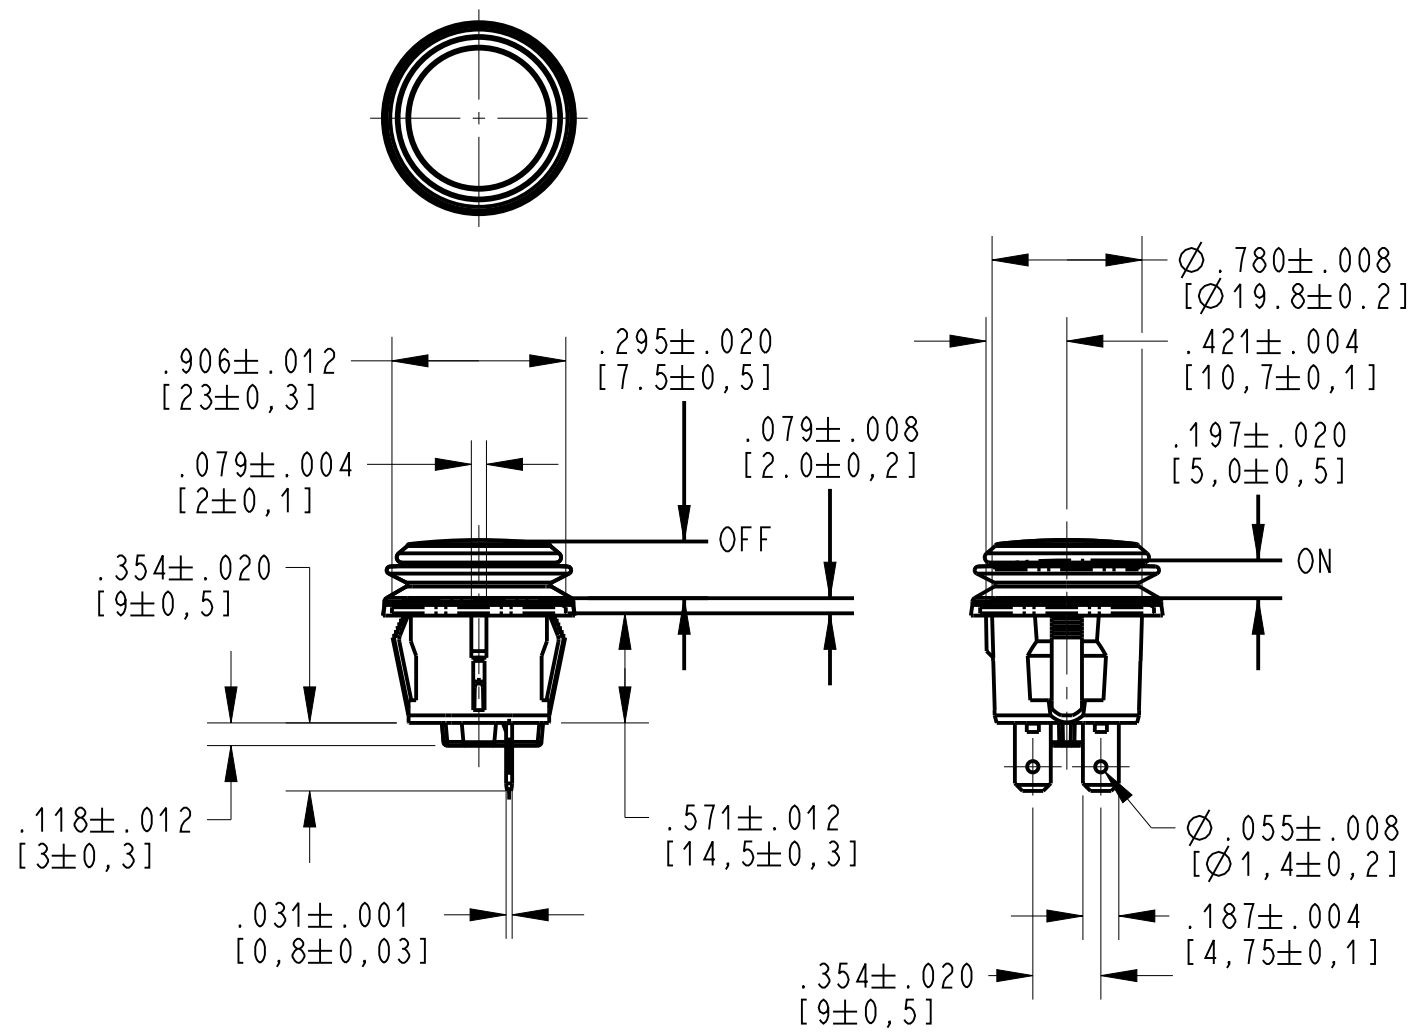


SWITCHING CIRCUIT	
OFF	
ON	


- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. RATING: 10A, 125 VAC; 6A, 250 VAC US
1/2 HP, 125/250 VAC US
20A, 14VDC, 10A 28VDC
NOT AGENCY APPROVED FOR DC
 2. U.L. ENDURANCE RATING 6000 CYCLES.
 3. INITIAL CONTACT RESISTANCE: 50m Ω (MAX.).
 4. INSULATION RESISTANCE: 500 VDC 100M Ω (MIN.).
 5. DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.
 6. WATERPROOF: IP65 CAPABLE.
 7. OPERATION TEMPERATURE: -25°C TO +85°C.
 8. HOUSING: BLACK, NYLON 66 (94-V0).
ACTUATOR: BLACK, PC (94-V2).
TERMINALS: SILVER PLATED, COPPER ALLOY.
WATERPROOF RUBBER: BLACK SILICONE.
 9. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

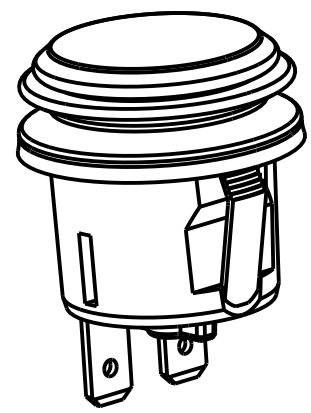

PANEL THICKNESS
.028 TO .098 [0,7 TO 2,5]

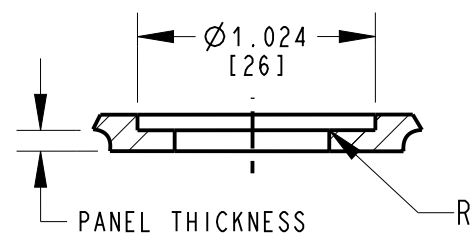

SCALE 3:2

DWN: C. RAMOS						 ZF Electronic Systems		
APVD: J. RUMMELHART								
DATE: 17-Jun-08						PLEASANT PRAIRIE, WISCONSIN U.S.A.		
THIRD ANGLE PROJECTION						NAME / DESCRIPTION		
						KF-SPST ON-OFF NON-LIGHTED		
PROJECT / CSR		TOLERANCE UNLESS SPECIFIED				B	ITEM NO. KFB2ANA1BBB	
N/A		DWG UNITS	X.XX	X.XXX	ANGLES			
		INCHES	± 0.02	± 0.012	± 5.0 °	SCALE:	1:1	SH 1 OF 1

H	Z000468335	09-Sep-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

FIG. 1
SCALE 2:1