
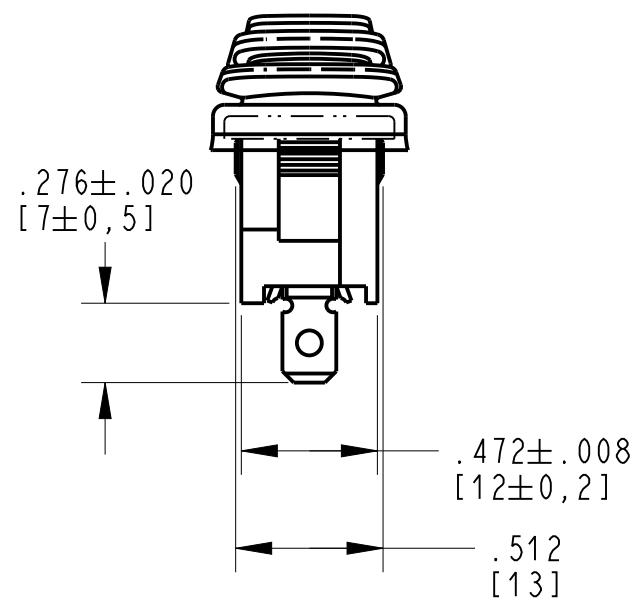
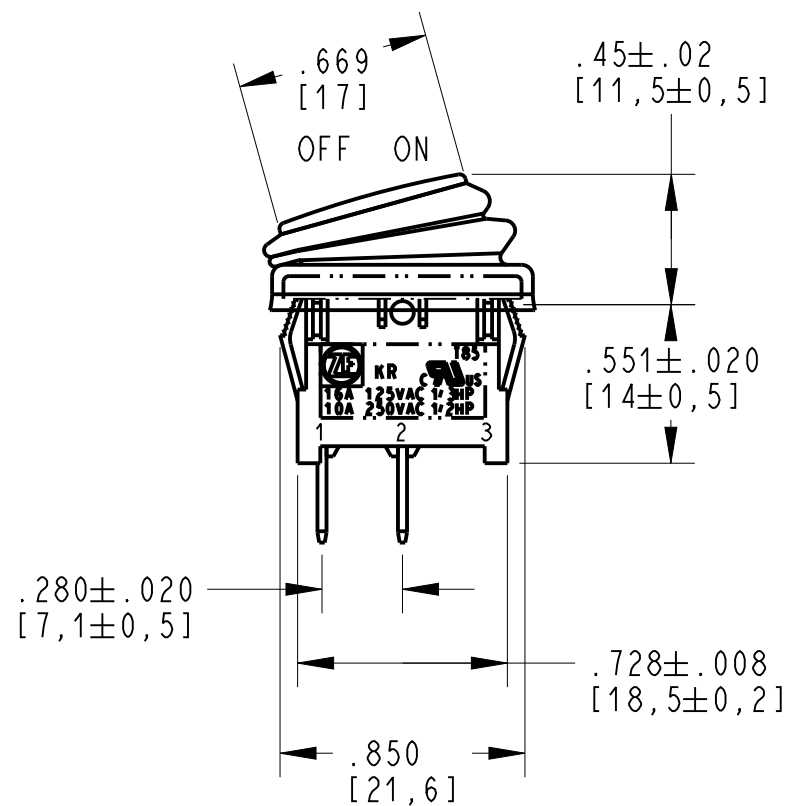
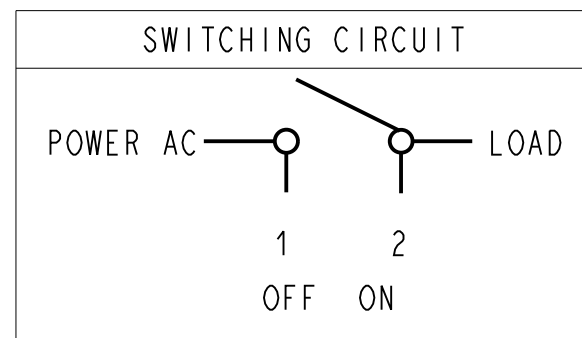


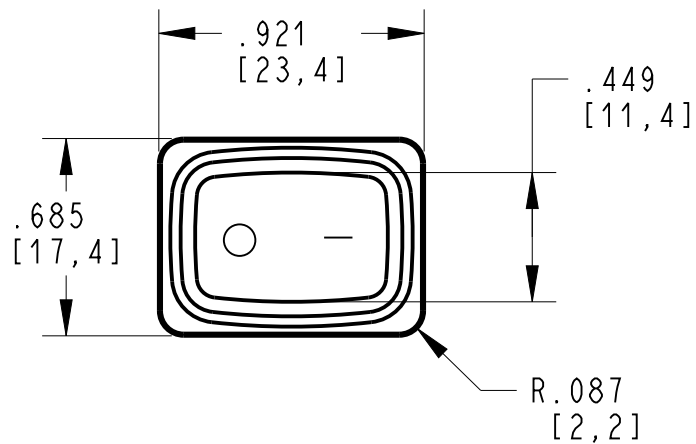

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING: 16A 125VAC, 1/3 HP 
10A 250VAC, 1/2 HP 
16A 12VDC, 6A 28VDC 
U.L. ENDURANCE RATING: 6000 CYCLES.

INITIAL CONTACT RESISTANCE: 50mΩ MAXIMUM.

INSULATION RESISTANCE: 500VDC 100MΩ MINIMUM.

DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP65 CAPABLE.

ACTUATOR: BLACK PC 94-V2.
HOUSING: BLACK NYLON 66 94-V2.
WATERPROOF RUBBER: BLACK SILICONE.


TEMPERATURE: -25°C TO 85°C.

TERMINALS: SILVER PLATED, COPPER ALLOY. QUICK CONNECT
.187±.004 [4.8±0,1] X .031±.001 [0,8±0,03].
HOLE DIAMETER .087±.008 [2,2±0,2].


RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS
LABORATORIES, INC.

DATE CODE FORMAT: YYWW.

LEGEND: HOT STAMPED WHITE.

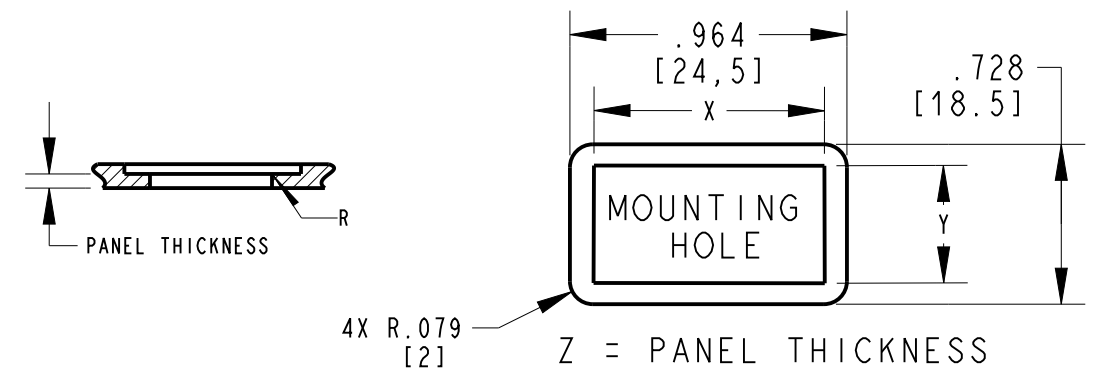

DIM. Z	DIM. X	DIM. Y
.030 TO .059 [0.75 TO 1.5]	.764+.000/- .004 [19.4+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]
.059 TO .098 [1.5 TO 2.5]	.780+.000/- .004 [19.8+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]

DWN: JED		 ZF Electronic Systems	
APVD: JR			
DATE: 20-May-08			
THIRD ANGLE PROJECTION		PLEASANT PRAIRIE, WISCONSIN U.S.A.	
		NAME / DESCRIPTION	
		KR-SPST ON-OFF NON-LIGHTED	
PROJECT/ CSR		B ITEM NO. KRE2ANA1BBD	
N/A		SCALE: 1:1.5 SH 1 OF 1	
TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °

K	Z000437889	03-Jan-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD