

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING: 16A 125VAC, 1/3 HP  US
10A 250VAC, 1/2 HP  US
16A 12VDC, 6A 28VDC  US

U.L. ENDURANCE RATING: 6000 CYCLES.

INITIAL CONTACT RESISTANCE: 50m Ω MAXIMUM

INSULATION RESISTANCE: 500VDC 100M Ω MINIMUM

DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP65 CAPABLE.

ACTUATOR: BLACK PC 94-V2.
HOUSING: BLACK NYLON 66 94-V2.
WATERPROOF RUBBER: BLACK SILICONE.


TERMINALS: SILVER PLATED COPPER ALLOY,
.187±.004[4,8±0,1] X .031±.001[0,8±0,03] QUICK CONNECT.
HOLE DIAMTER .087±.008 (2.2±0.2)

TEMPERATURE: -25°C TO 85°C

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

DATE CODE FORMAT: YYWW

NO LEGEND

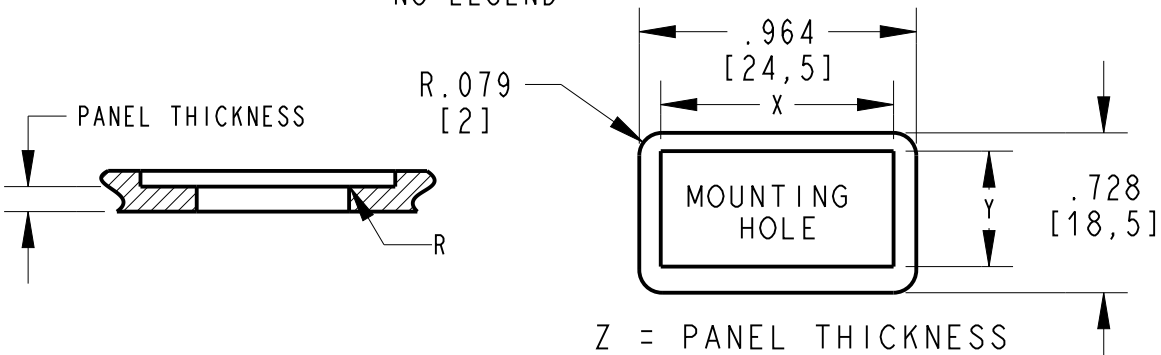

DIM. Z	DIM. X	DIM. Y
.030 TO .059 [0.75 TO 1.5]	.764+.000/- .004 [19.4+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]
.059 TO .098 [1.5 TO 2.5]	.780+.000/- .004 [19.8+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION



KR-SPDT ON-ON NON LIGHTED

ITEM NO. KRE2BNA1BBB

SCALE: 1:1.5 SH 1 OF 1

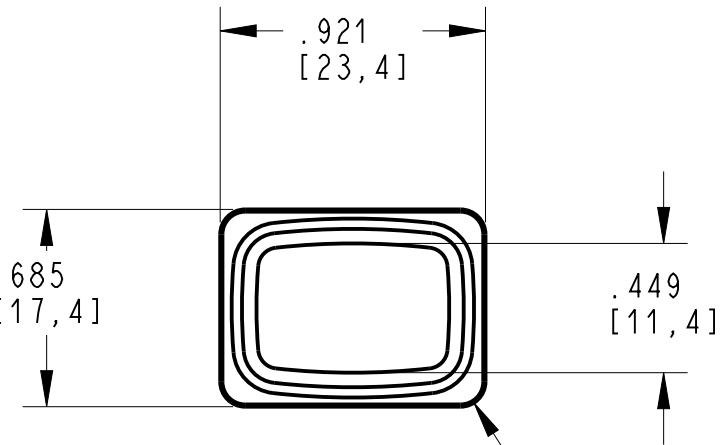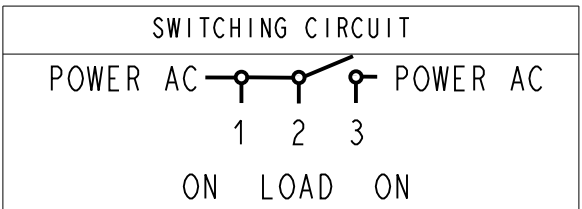

R.087
[2,2]

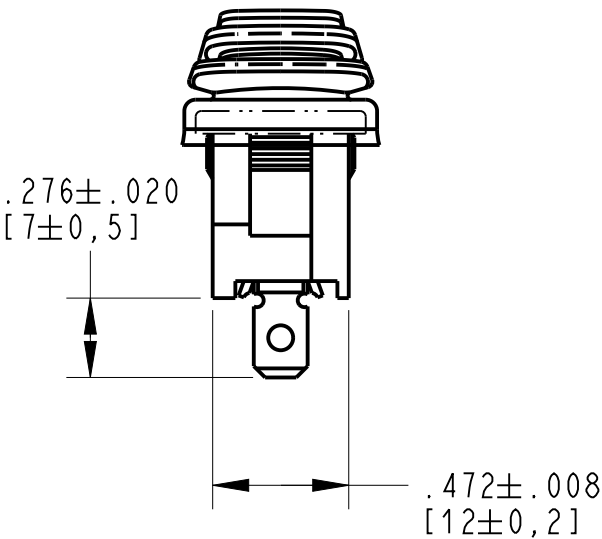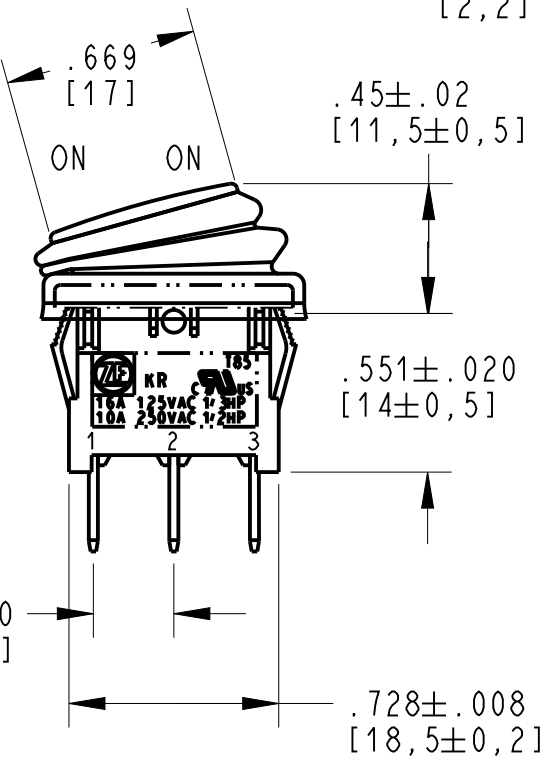


DWN: J. DOLNIK

APVD: JR

DATE: 21-Jul-11

THIRD ANGLE PROJECTION



PROJECT/ CSR

N/A

H	Z000437889	04-Jan-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD