

8 7 6 5 4 3 2 1

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING: 16A 125VAC, 1/3 HP
10A 250VAC, 1/2 HP
16A 12VDC, 6A 28VDC
U.L. ENDURANCE RATING: 6000 CYCLES.



INITIAL CONTACT RESISTANCE: 50mΩ MAXIMUM.
INSULATION RESISTANCE: 500VDC 100MΩ MINIMUM.
DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
WATERPROOF: IP65 CAPABLE.

ACTUATOR: BLACK PC 94-V2.
HOUSING: BLACK NYLON 66 94-V2.
WATERPROOF RUBBER: BLACK SILICONE.



RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

TEMPERATURE: -25°C TO 85°C.




TERMINALS: SILVER PLATED, COPPER ALLOY,
.187±.004[4.8±0.1] X .31±.001[0.8±0.03] QUICK CONNECT,
HOLE DIAMETER .087±.008 (2.2±0.2).

DATE CODE FORMAT: YYWW.

NO LEGEND.

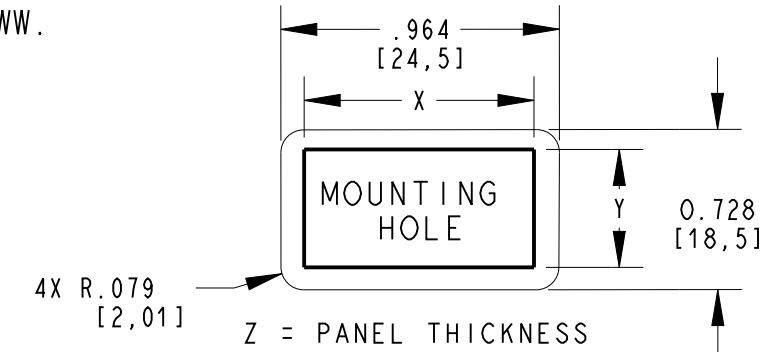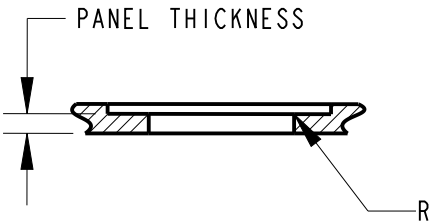


DIM. Z	DIM. X	DIM. Y
.030 TO .059 [0.75 TO 1.5]	.764+.000/- .004 [19.4+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]
.059 TO .098 [1.5 TO 2.5]	.780+.000/- .004 [19.8+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]

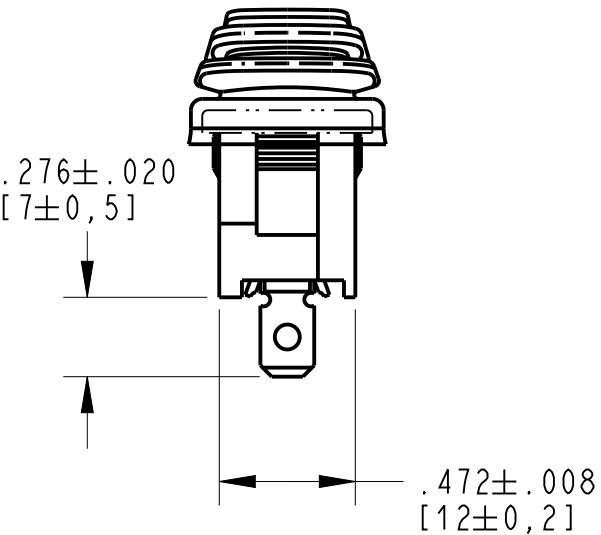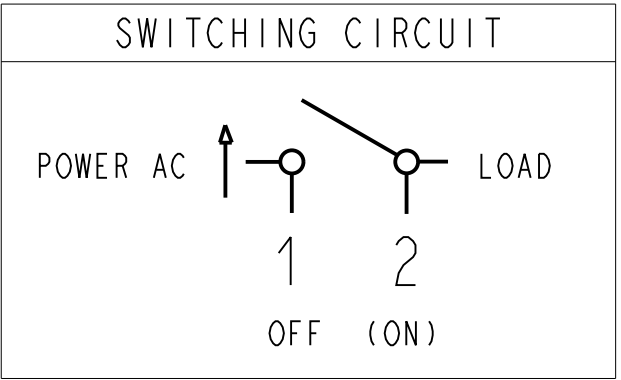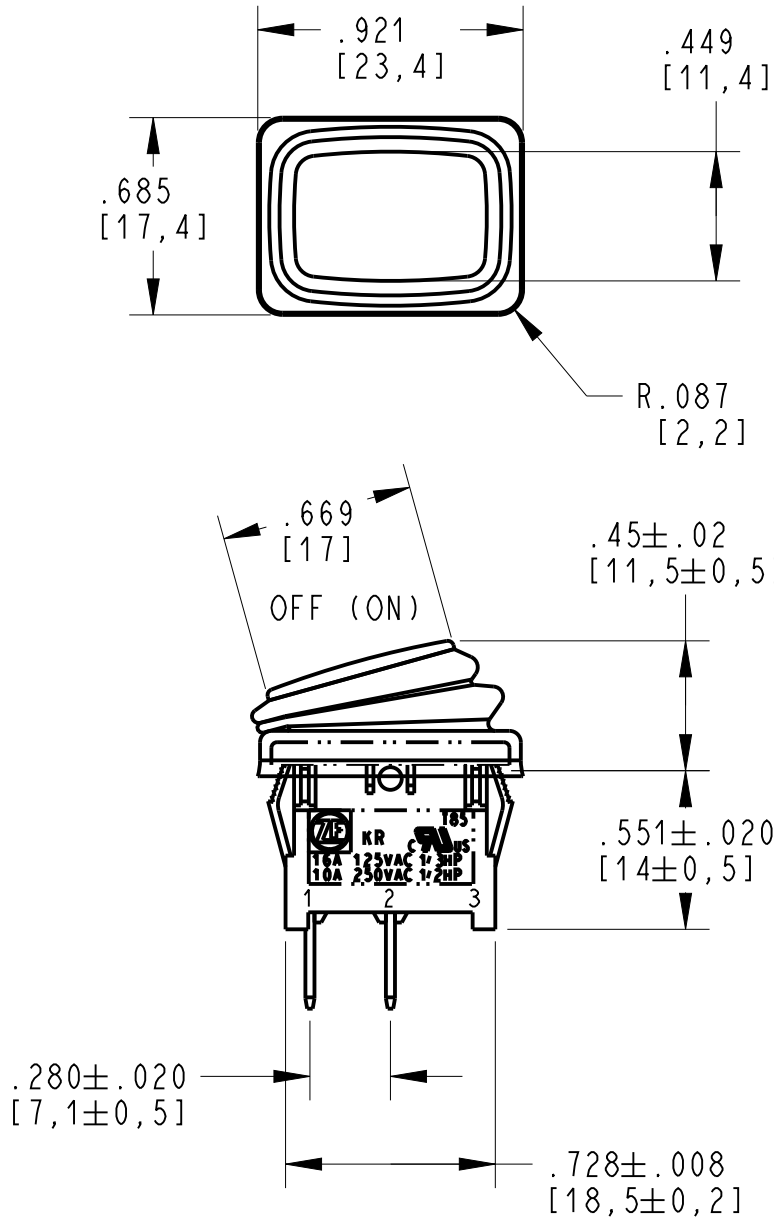

DWN: J. DOLNIK
APVD: JR
DATE: 20-May-08

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

J	Z000437889	04-Jan-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KR-SPST (ON)-OFF NON LIGHTED

B ITEM NO. KRE2DNA1BBB

SCALE: 1:1.5 SH 1 OF 1

8 7 6 5 4 3 2 1

ORIGINAL ON PRO/E