

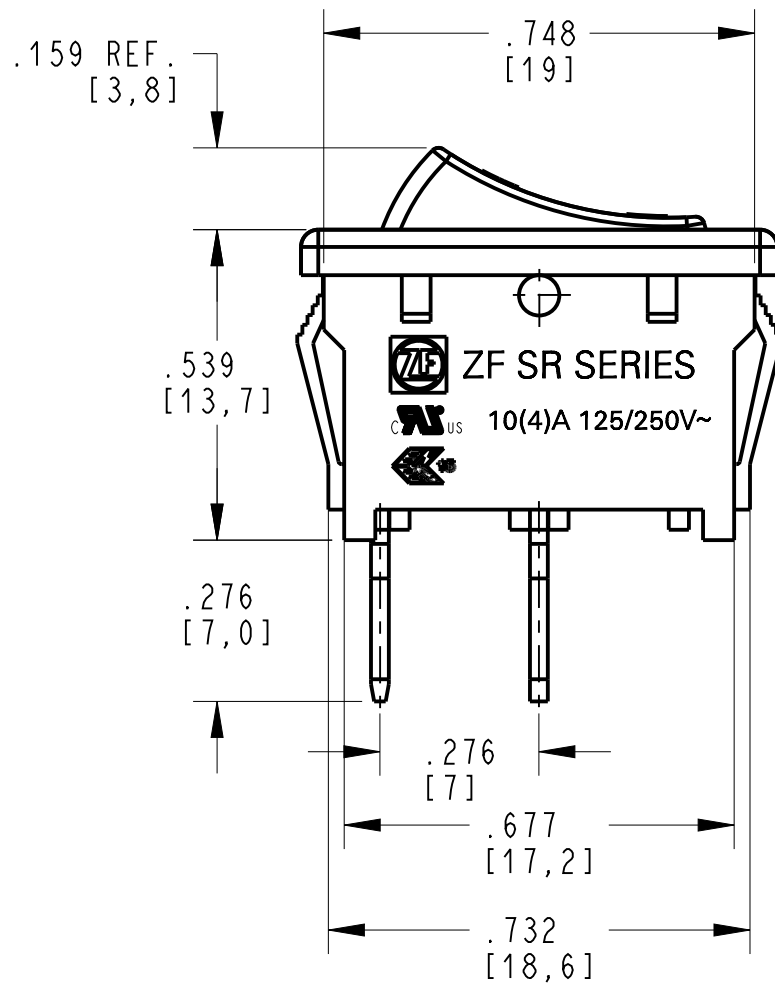
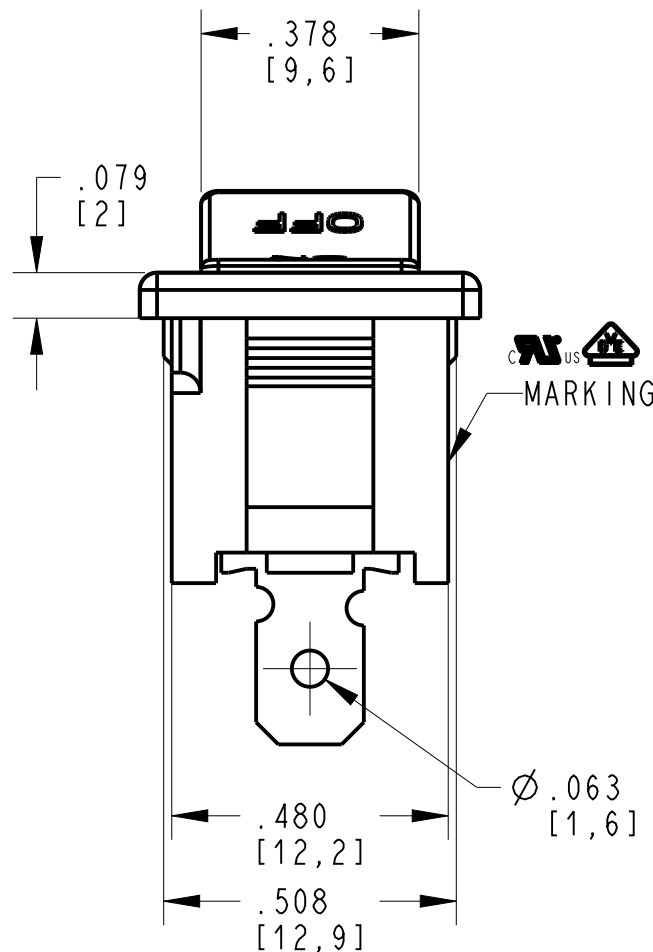
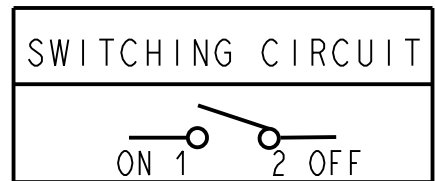
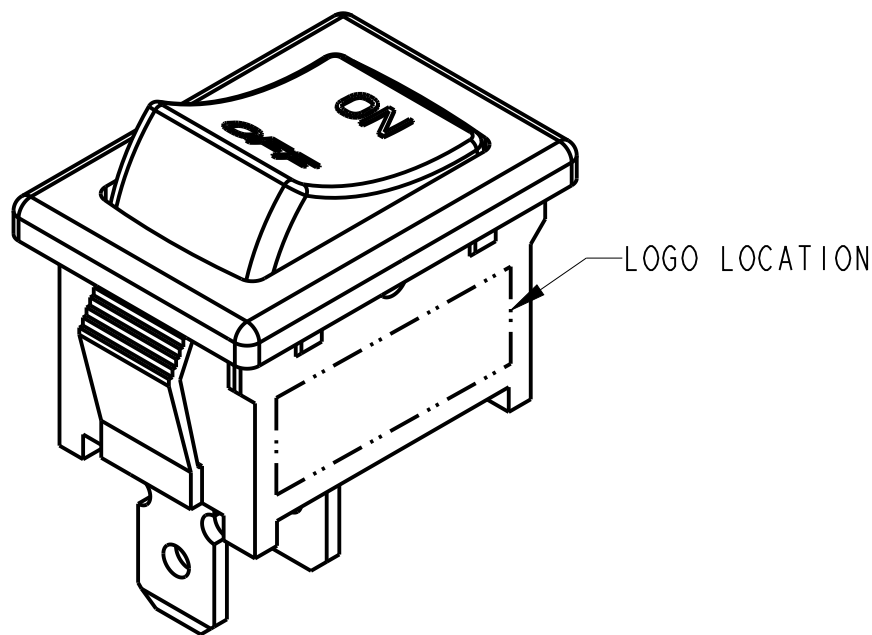


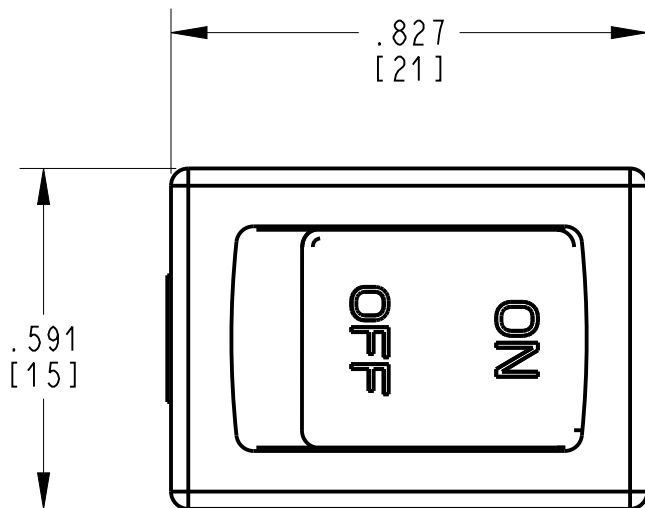

NOTES (UNLESS OTHERWISE SPECIFIED):

1. RATING TO BE MARKED ON HOUSING: 10A 125 VAC
10A 125 VAC
6A 250 VAC
10(4)A 250 V~ T125/55
10(4)A 125/250V~T55
2. DIELECTRIC STRENGTH: 1,000 VAC FOR 1 MINUTE.
3. INSULATION RESISTANCE: 100 MΩ MIN. AT 500 VDC.
4. INITIAL CONTACT RESISTANCE: 20 mΩ MAX.
5. ELECTRICAL LIFE: 50,000 CYCLES.
6. ACTUATOR COLOR: BLACK
HOUSING COLOR: BLACK
7. TERMINALS: .185+.004/- .002 [4,7+0,1/-0,05] WIDE
X 0.031±.001 [0,8±0,03] THICK.
8. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.

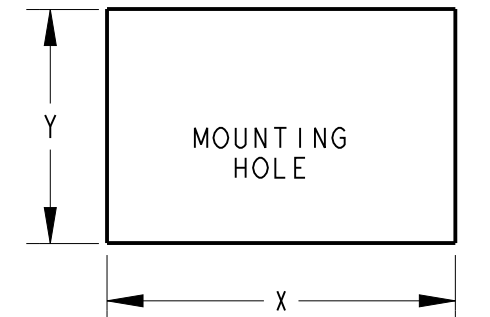

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0,75 TO 1,25]	.756+.004/- .000 [19,2+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0]
.049 TO .079 [1,25 TO 2,0]	.764+.004/- .000 [19,4+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0]
.079 TO .118 [2,0 TO 3,0]	.780+.004/- .000 [19,8+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0]

DWN: JED		PLEASANT PRAIRIE, WISCONSIN U.S.A.	
APVD: RF			
DATE: 28-Oct-08			
THIRD ANGLE PROJECTION	NAME / DESCRIPTION		
	SR ROCKER		
PROJECT/ CSR	ITEM NO. SRB22A2DBBNN		
N/A	SCALE: 3:1 SH 1 OF 1		
TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °

J	Z000435630	07-Dec-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD