
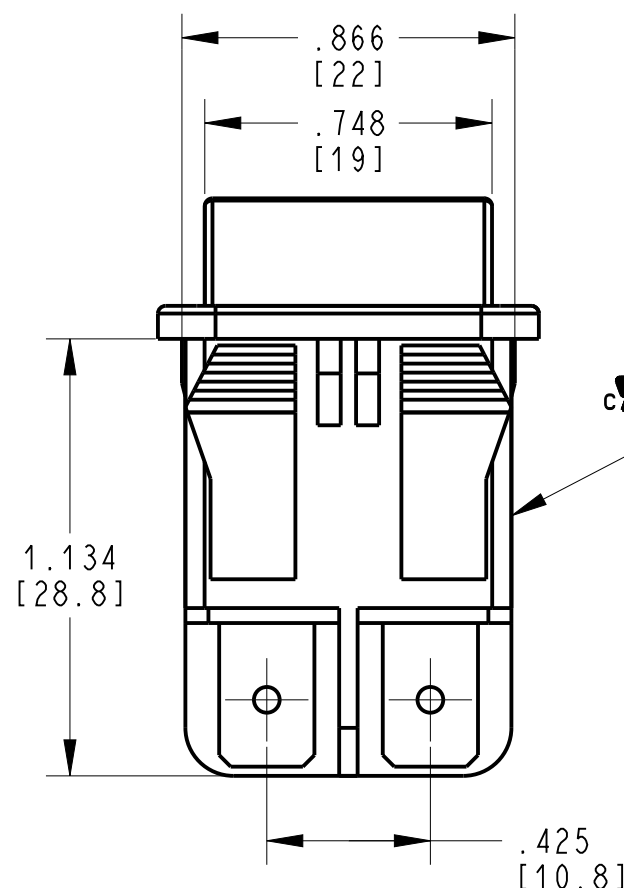
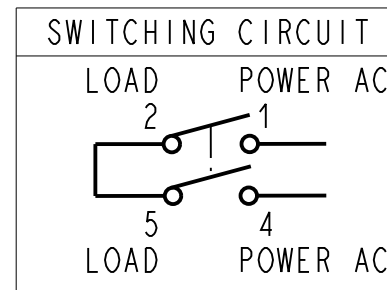
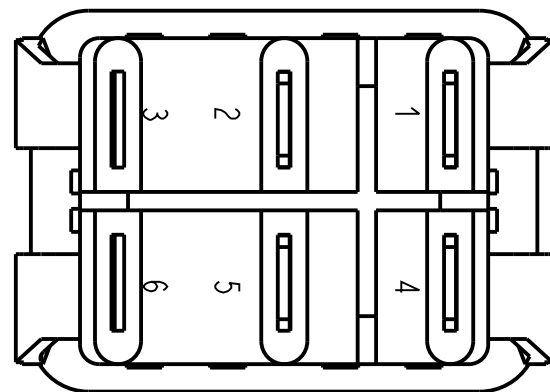
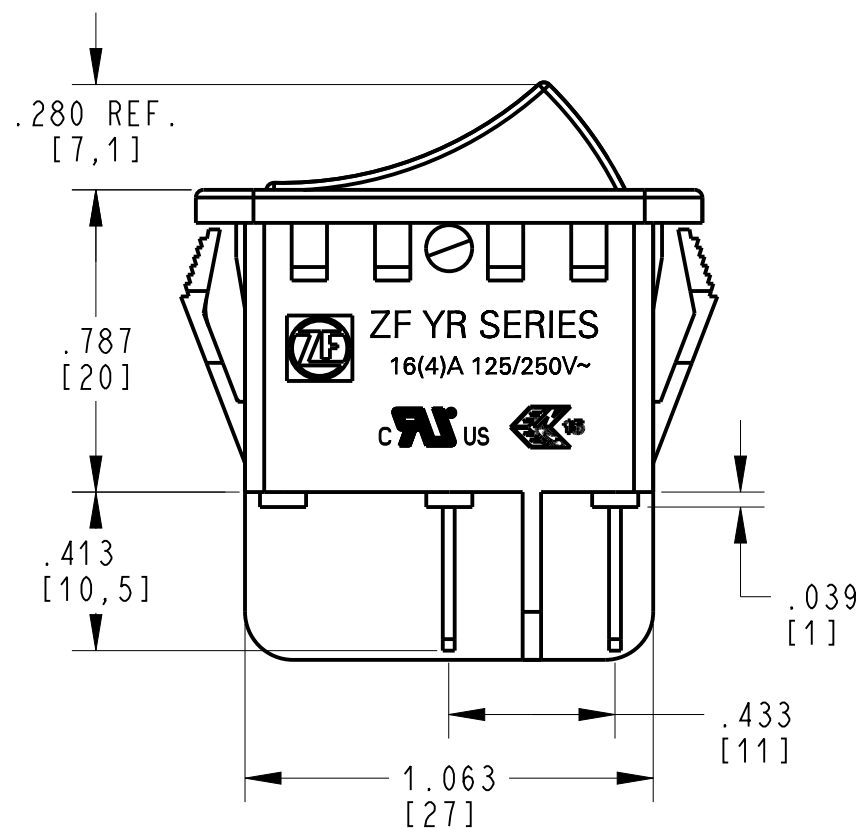


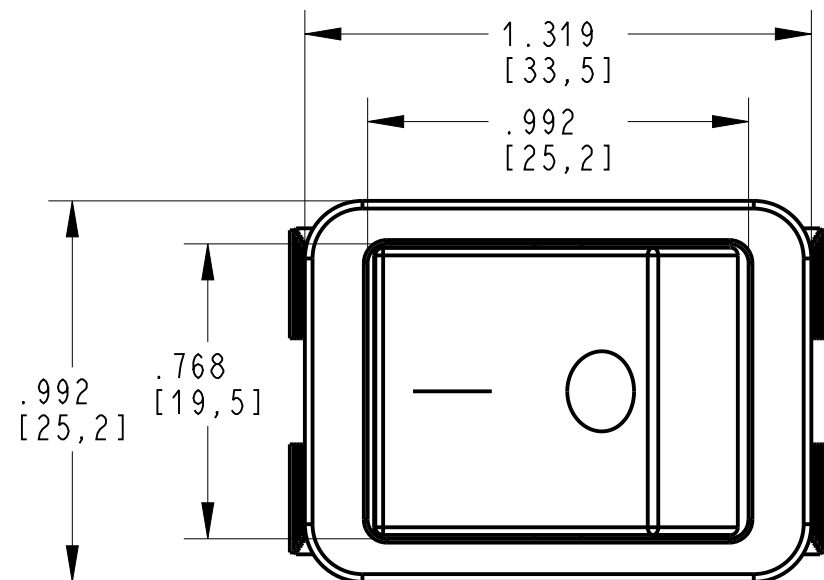

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON ROCKER:
16A 125/250VAC
20A 125VAC
3/4HP 125/250VAC

16(4)A 250V~T125/55
10(2)A 250V~T125/55 50E3
16(8)A 250V~T125/55


16(4)A 125/250V~

2. DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MINUTE

3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.

4. INITIAL CONTACT RESISTANCE: 20m Ω (MAX.)


5. TERMINALS: .248+.004/-0.002 [6,3+0,1/-0,05] WIDE
X .031 $\pm$.001 [0,8 $\pm$ 0,03] THICK.
HOLE $\varnothing$.067 $\pm$.004 [1,7 $\pm$ 0,1]; 4 PLACES.

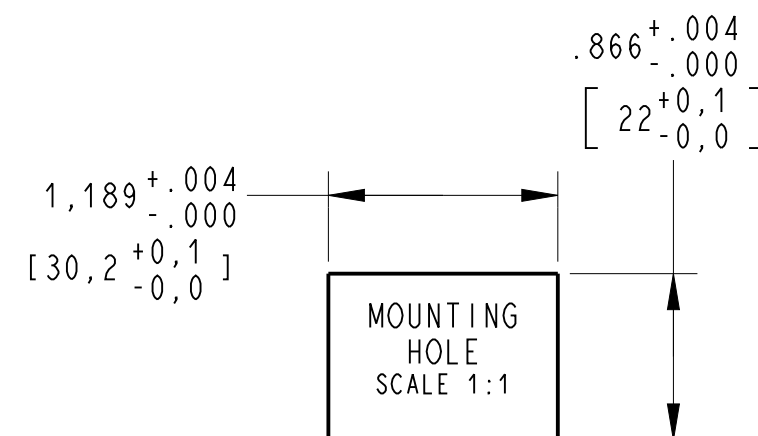

PANEL THICKNESS: .029~.049
[0,75~1,25]

DWN: JPD
APVD: ELL
DATE: 18-Apr-18

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

A	Z000453455	18-Apr-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. YRM32F2FBBNN

SCALE: 2:1 SH 1 OF 1