


NOTES UNLESS OTHERWISE SPECIFIED:

1. *SWITCH CHARACTERISTICS
- | | |
|-----------------------|--------------|
| REST POSITION | 1.024 MAX. |
| PRE-TRAVEL | .600 MAX. |
| OPERATING POSITION | .375 TO .499 |
| OVER TRAVEL | .156 MIN. |
| MOVEMENT DIFF. | |
| EACH POLE | .080 MAX. |
| OPERATING FORCE grams | 283 MAX. |
| RELEASE FORCE grams | 28 MIN. |

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.


2. **UL** ELECTRICAL RATING
20A, 125/250 VAC
1 HP, 125VAC
2 HP, 250VAC
3. TERMINALS ARE: .250 WIDE x .032 THICK.
4. TEMPERATURE RATING: -40° TO 105°C .
5. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

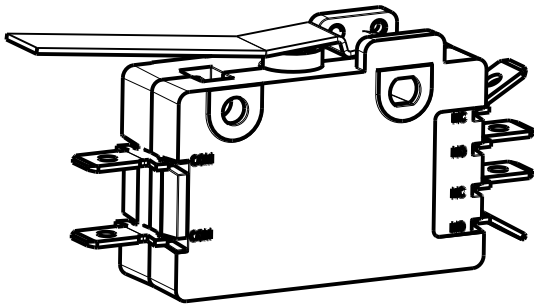

SHOWN IN A NON CLINCHED STATE
SCALE 1.000

DWN: TLM
APVD: RY
DATE: 13-May-08

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

C	Z000371638	25-Jul-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	$\pm 5.0^\circ$



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. 0E20-50H0

SCALE: 2.000 SH 1 OF 1