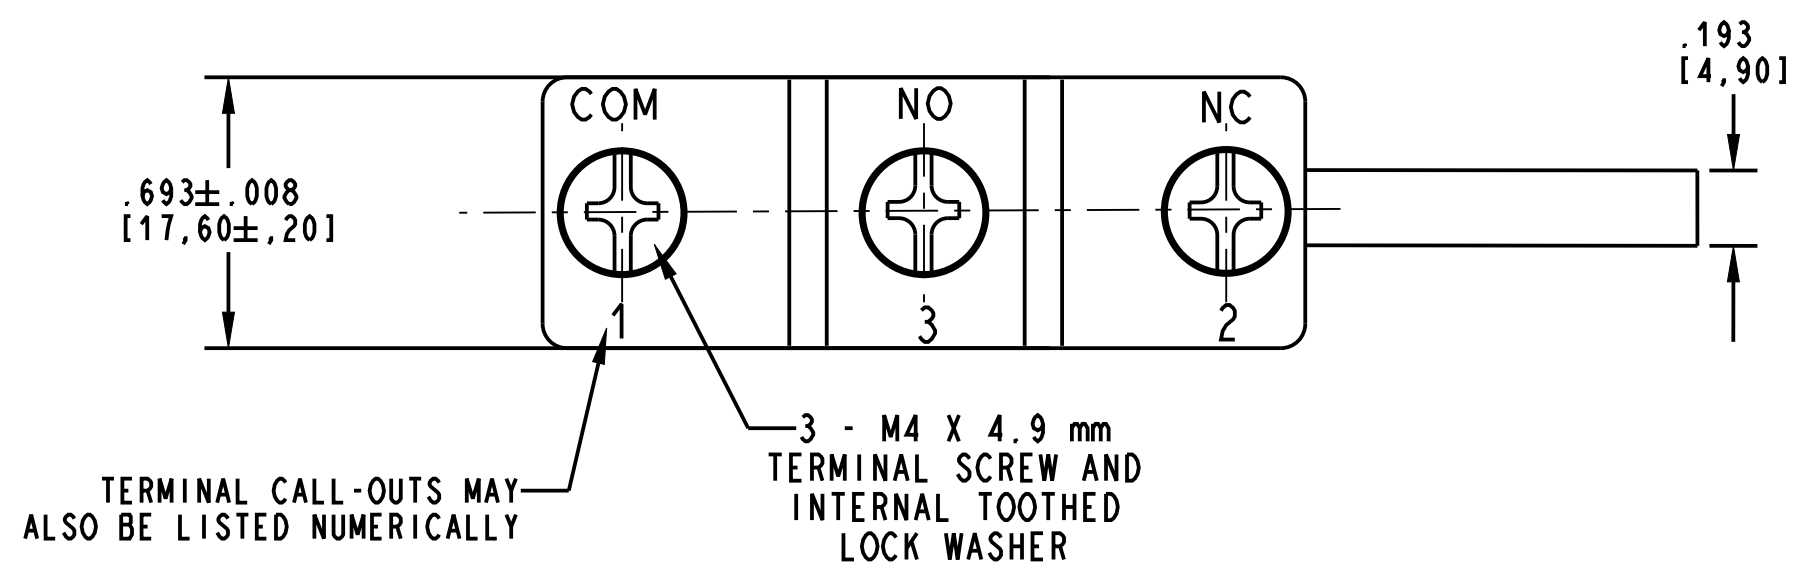




- NOTES (UNLESS OTHERWISE SPECIFIED):

- 1 RECOMMENDED MOUNTING:  
M4 FASTENER WITH 6.00 IN-LB (7.00 KGF-CM) OF TORQUE MAXIMUM.
- 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE  
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
- 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED  
FROM THE REFERENCE LINE.
- 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.



SWITCH CHARACTERISTICS	
ELECTRICAL RATING	20A 250VAC (cULus) T55°C
TERMINAL	SCREW
OPER. FORCE MAX.	80 GMS
RELEASE FORCE MIN.	14 GMS
PRETRAVEL MAX.	.394 [10.0 mm]
OVERTRAVEL MIN.	.220 [5.61 mm]
MOVE. DIFF. MAX.	.050 [1.27 mm]
OPERATING POSITION	.716 TO .780 [18.2 TO 19.8 mm]

DWN: TLM		 <b>ZF Electronic Systems</b> PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION SWITCH						
APVD: S.G.								
DATE: 2025-03-27								
THIRD ANGLE PROJECTION								
		TOLERANCE UNLESS SPECIFIED						
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO.	GPTBLS01
D	4000000138	INCHES	± 0.02	± 0.015	± 5 °	SCALE:	2:1	SH 1 OF 1