




- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. RECOMMENDED MOUNTING:
M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
 2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER
THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.
 3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE
AND MEASURED FROM THE REFERENCE LINE.
 4. FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

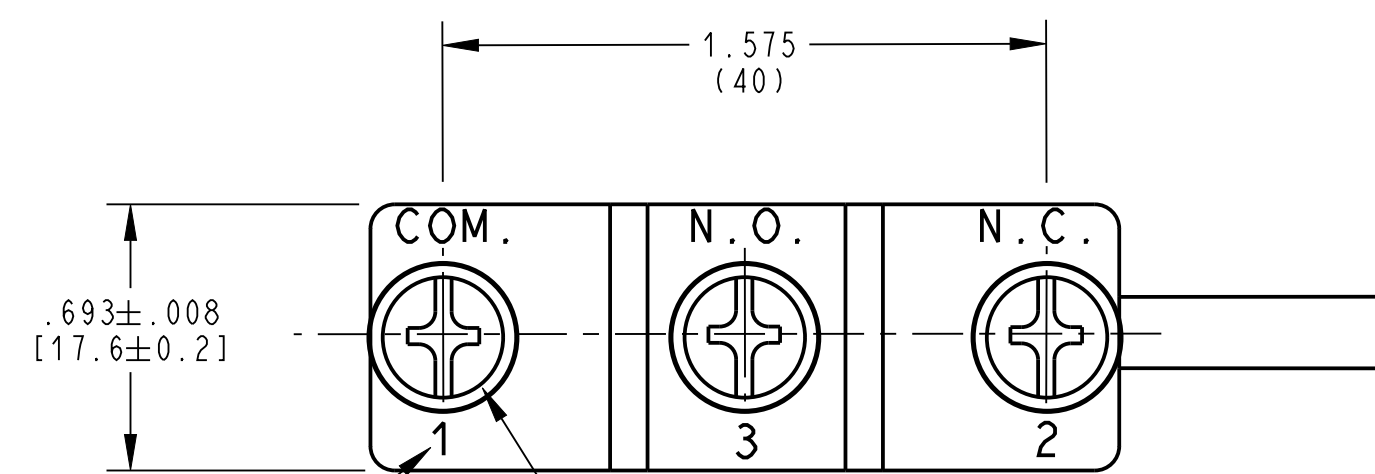

TERMINAL CALL-OUTS MAY
ALSO BE LISTED NUMERICALLY

3 - M4 X 4.9 mm
TERMINAL SCREW AND
INTERNAL TOOTHED
LOCK WASHER

CHARACTERISTICS	
ELECTRICAL RATING	15A 250 VAC (cULus) T55°C 15A 250 V~ (VDE) -5T40
TERMINAL	SCREW
OPER. FORCE MAX.	70 GMS
RELEASE FORCE MIN.	14 GMS
PRETRAVEL MAX.	.394 [10 mm]
OVERTRAVEL MIN.	.220 [5.6 mm]
MOVE. DIFF. MAX.	.050 [1.27 mm]
OPERATING POSITION	.716 TO .780 [18.2 TO 19.8 mm]

DWN: J. DOLNIK				ZF Electronic Systems	
APVD: SB				PLEASANT PRAIRIE, WISCONSIN U.S.A.	
DATE: 10-Jan-05		NAME / DESCRIPTION		SPEC DRAWING	
THIRD ANGLE PROJECTION		TOLERANCE UNLESS SPECIFIED		C ITEM NO. GPTCLS01	
		DWG UNITS	X.XX	X.XXX	ANGLES
PROJECT/ CSR		INCHES	± 0.02	± 0.015	± 0.5 °
REV		ECO NO.	DATE	PREP	APVD
4000000138					
SCALE: N.T.S.		SH 1 OF 1			

E	Z000360145	20-Apr-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD