

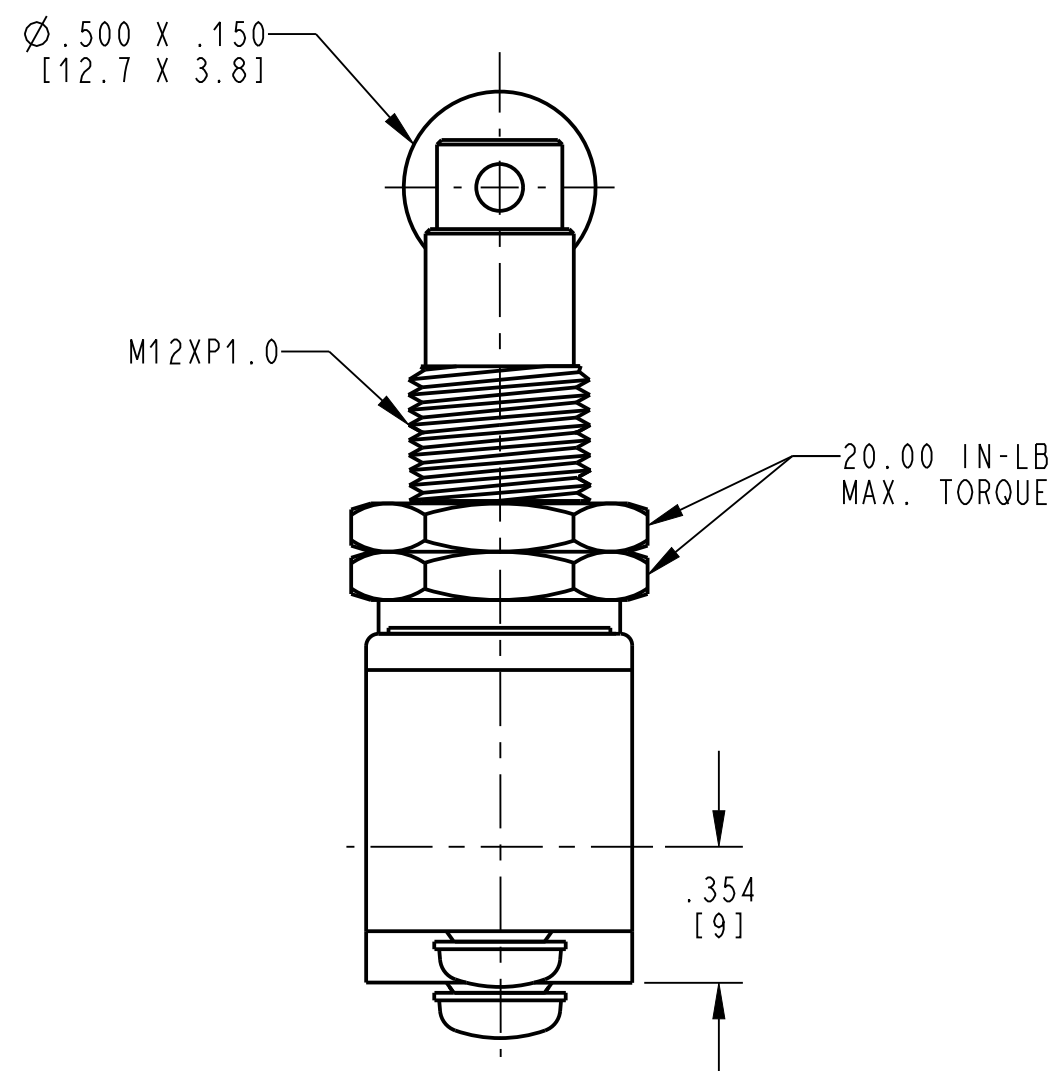


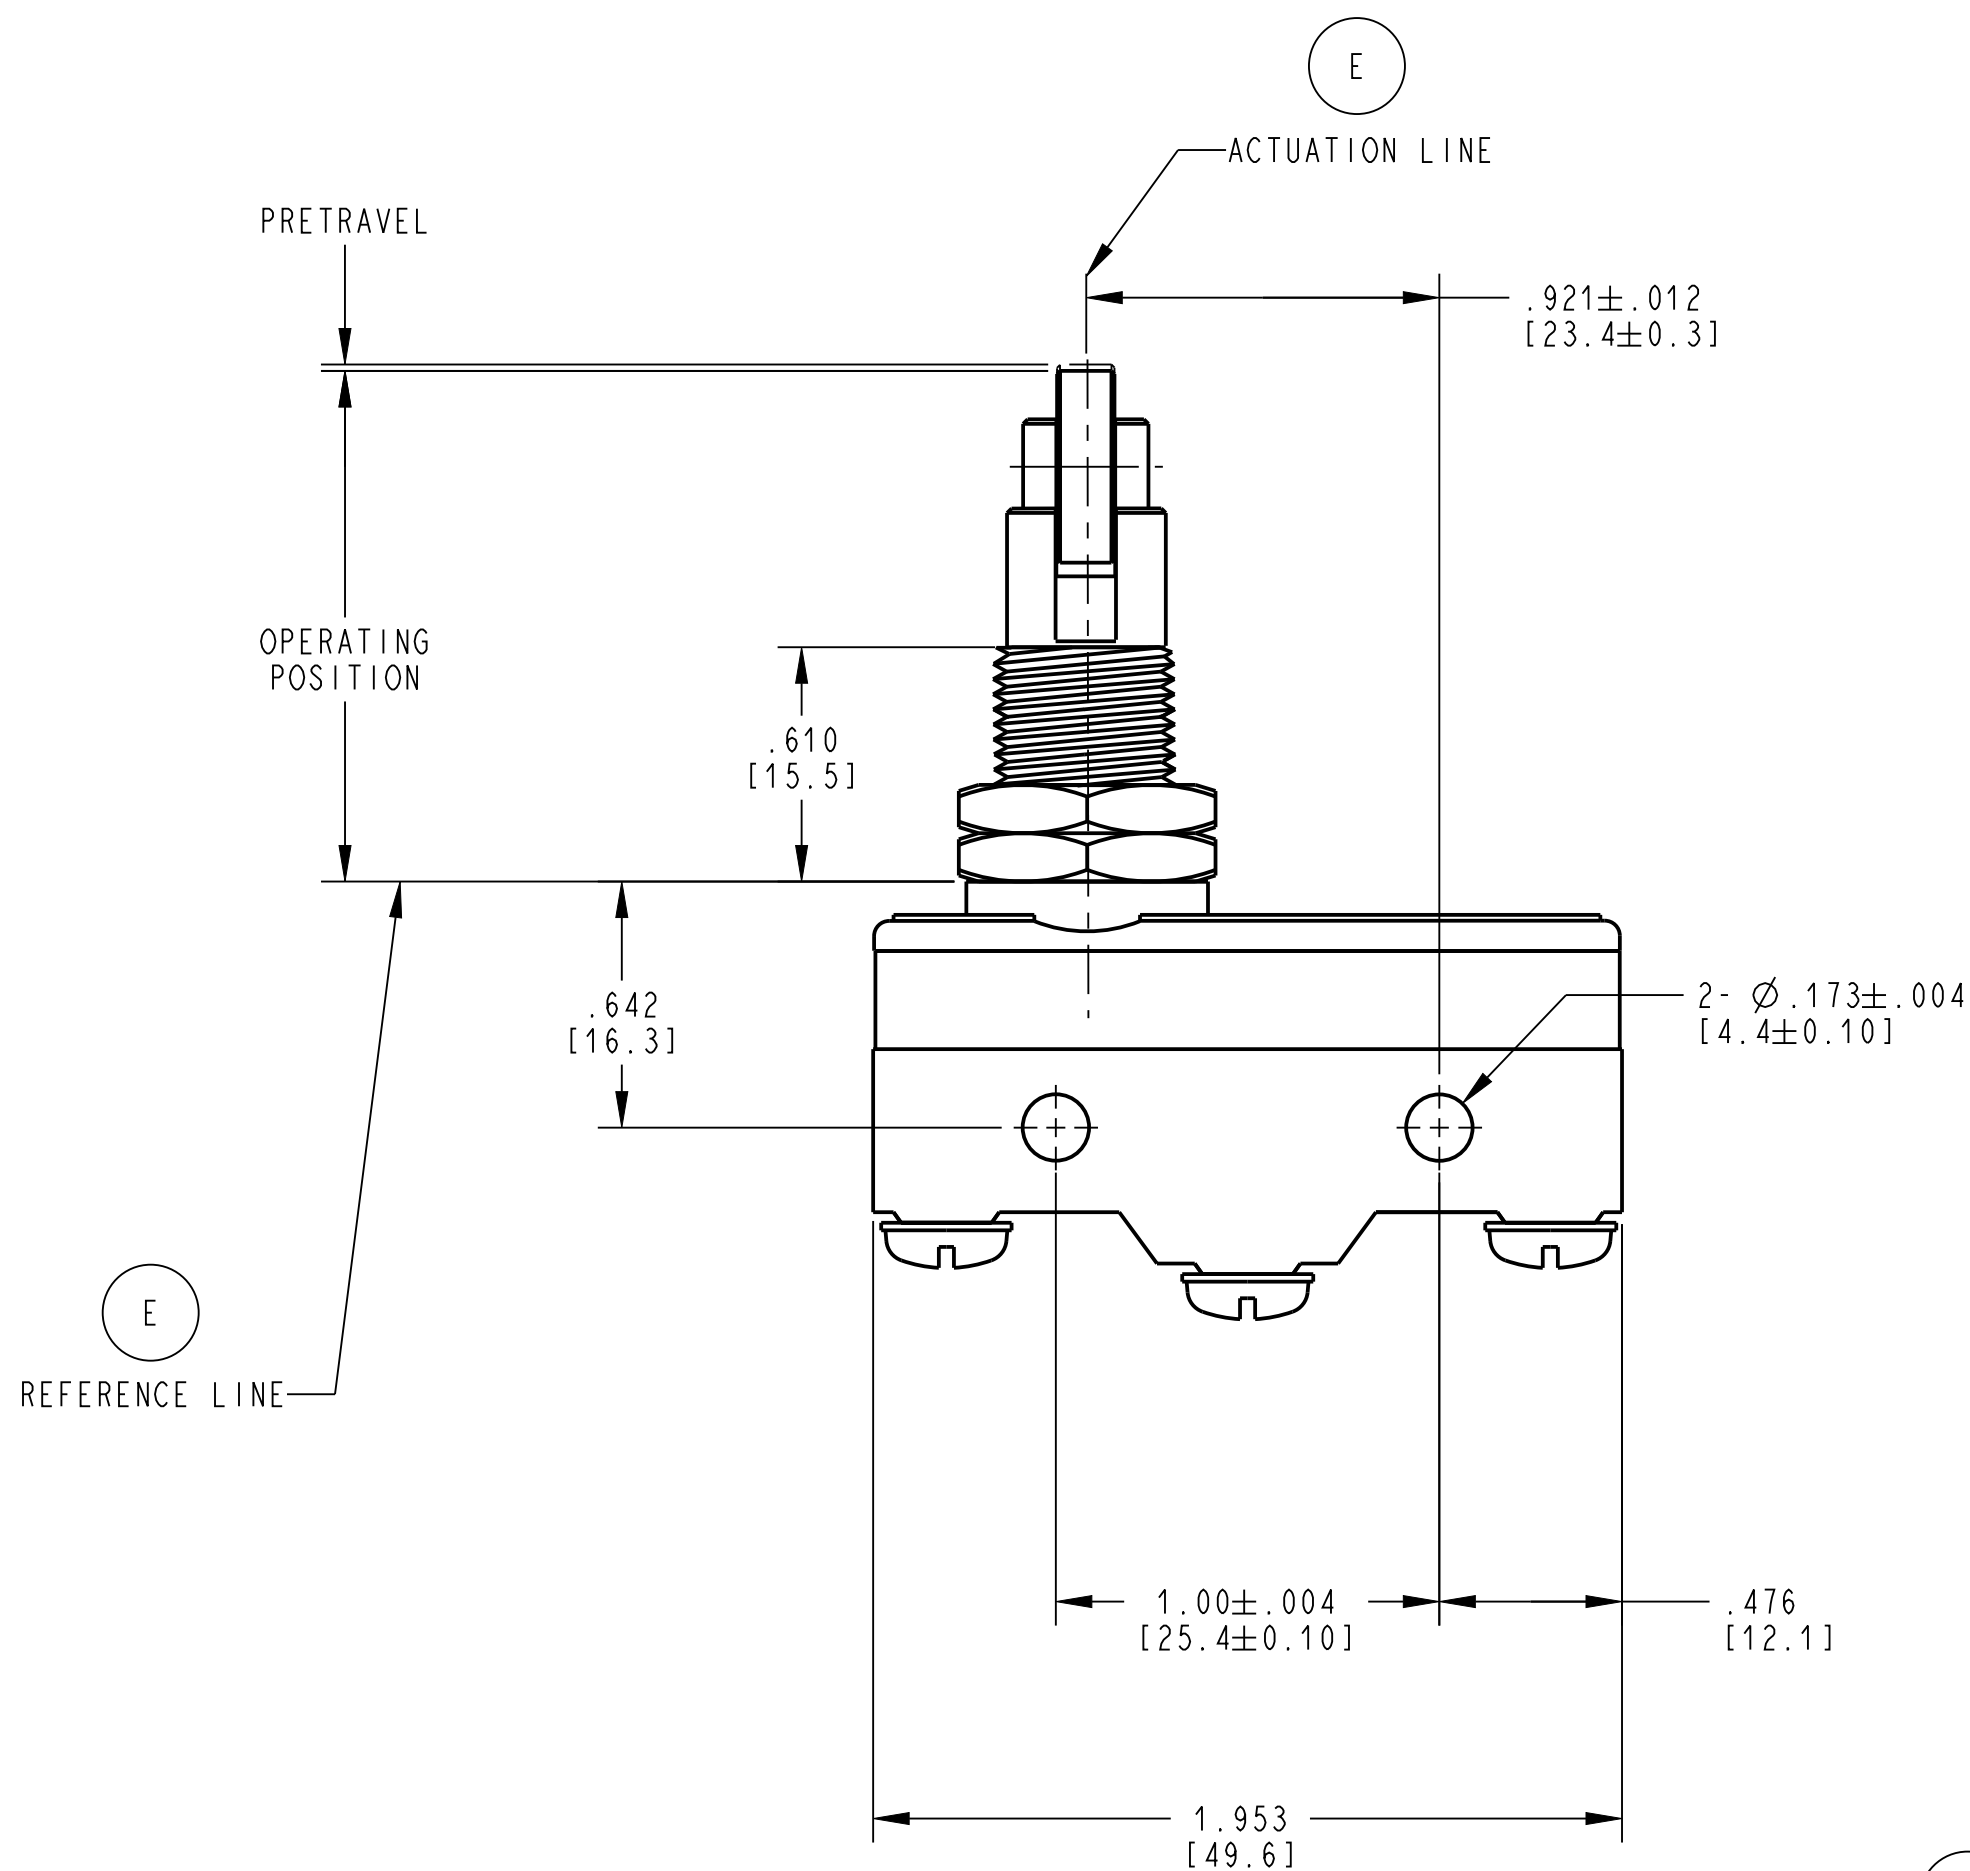

NOTES (UNLESS OTHERWISE SPECIFIED):


1. RECOMMENDED MOUNTING: M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATION SEE ES021295.

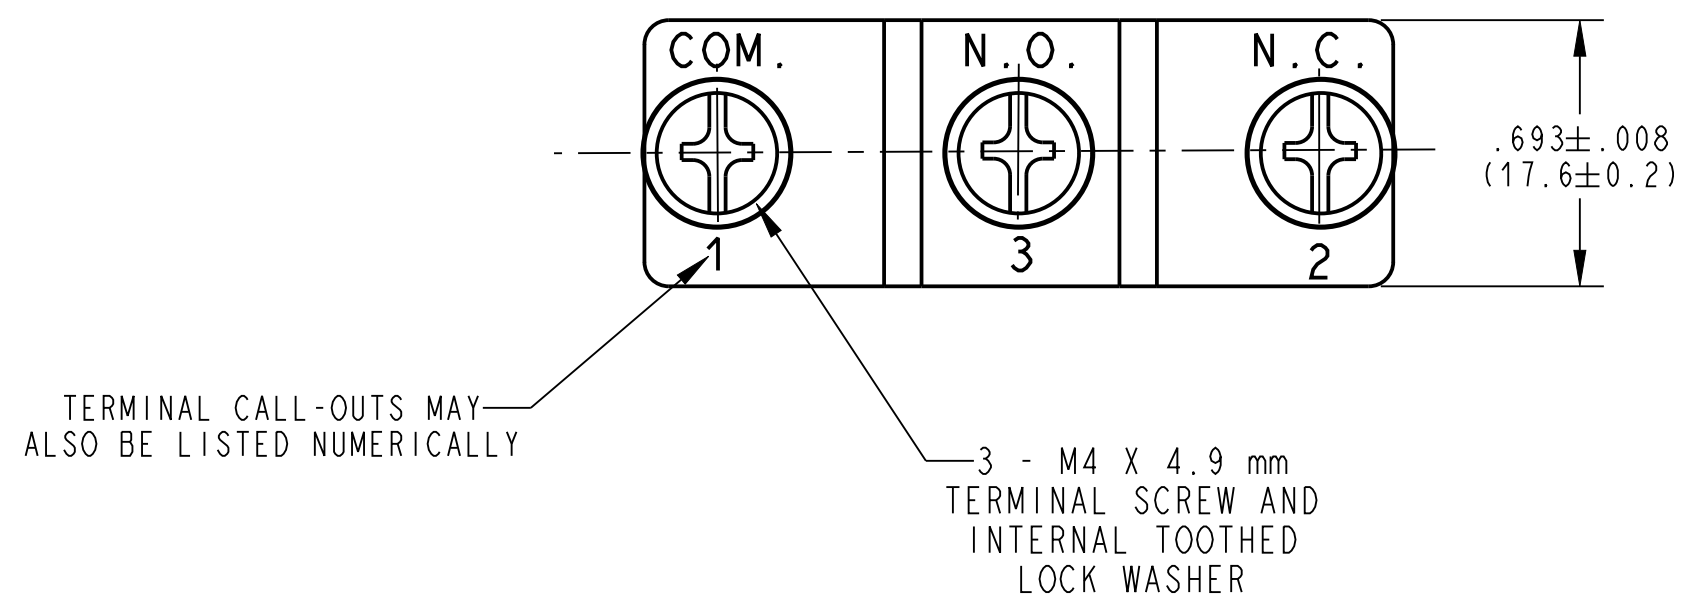

CHARACTERISTICS

ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE)-5T40
TERMINAL	SCREW
OPER. FORCE MAX.	350 GMS
RELEASE FORCE MIN.	114 GMS
PRETRAVEL MAX.	.016 [0.4 mm]
OVERTRAVEL MIN.	.140 [3.58 mm]
MOVE. DIFF. MAX.	.002 [0.05 mm]
OPERATING POSITION	1.268 TO 1.362 [32.2 TO 34.6 mm]

DWN: JED
APVD: SB
DATE: 25-May-04
THIRD ANGLE PROJECTION



TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.015	± 5 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SWITCH

C ITEM NO. GPTCRH02

SCALE: DO NOT SCALE SH 1 OF 1

E	Z0003600152	2016-04-20	GP	EL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
4000000138