


(F) NOTES (UNLESS OTHERWISE SPECIFIED):

1. RECOMMENDED MOUNTING: M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATION SEE ES021295.

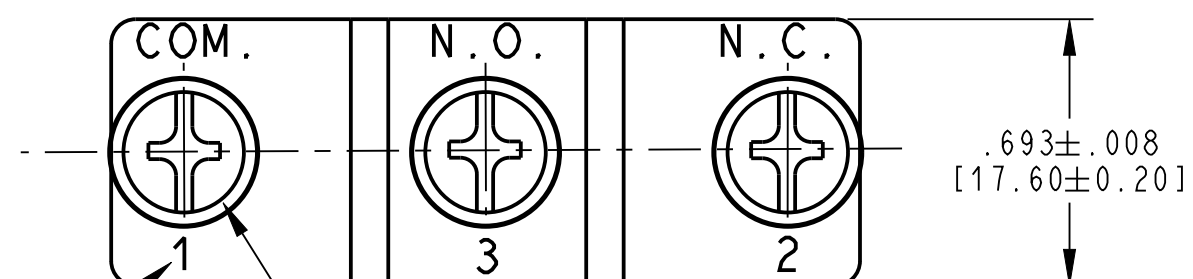


TERMINAL CALL-OUTS MAY ALSO BE LISTED NUMERICALLY

3 - M4 X 4.9 mm
TERMINAL SCREW AND
INTERNAL TOOTHED
LOCK WASHER

CHARACTERISTICS

ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE)-5T40
TERMINAL	SCREW
ROLLER	ACUMEN ACETAL F20-03
OPER. FORCE MAX.	160 GMS
RELEASE FORCE MIN.	42 GMS
PRETRAVEL MAX.	.106 [2.7 mm]
OVERTRAVEL MIN.	.094 [2.4 mm]
MOVE. DIFF. MAX.	.019 [0.5 mm]
REST POSITION MAX.	1.280 [32.5 mm]
OPERATING POSITION	1.173 TO 1.205 [29.8 TO 30.6 mm]

DWN: JED
APVD: SB
DATE: 25-May-04
THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

F	Z000360152	2016-04-21	GP	EL	PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO.	GPTCRM01
REV	ECO NO.	DATE	PREP	APVD	4000000138	INCH	± 0.02	± 0.015	± 5 °	SCALE:	DO NOT SCALE	SH 1 OF 1