

8 7 6 5 4 3 2 1

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING: 16A 125VAC, 1/3 HP
10A 250VAC, 1/2 HP
16A 12VDC, 6A 28VDC
U.L. ENDURANCE RATING: 6000 CYCLES.



INITIAL CONTACT RESISTANCE: 50mΩ MAXIMUM.
INSULATION RESISTANCE: 500VDC 100MΩ MINIMUM.
DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
WATERPROOF: IP65 CAPABLE.
ACTUATOR: BLACK PC 94-V2.
HOUSING: BLACK NYLON 66 94-V2.
WATERPROOF RUBBER: BLACK SILICONE.



RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

TEMPERATURE: -25°C TO 85°C.




TERMINALS: SILVER PLATED, COPPER ALLOY,
.187±.004[4.8±0.1] X .31±.001[0.8±0.03] QUICK CONNECT,
HOLE DIAMETER .087±.008 (2.2±0.2).

DATE CODE FORMAT: YYWW.


NO LEGEND.

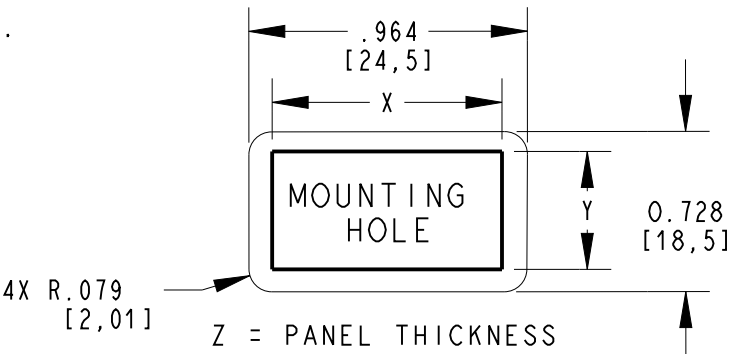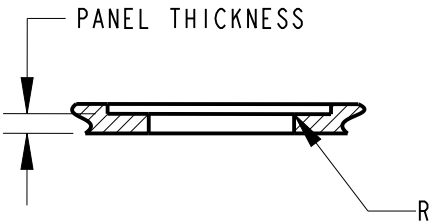

DIM. Z	DIM. X	DIM. Y
.030 TO .059 [0.75 TO 1.5]	.764+.000/- .004 [19.4+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]
.059 TO .098 [1.5 TO 2.5]	.780+.000/- .004 [19.8+0.0/-0.1]	.512+.004/- .000 [13+0.1/-0.0]

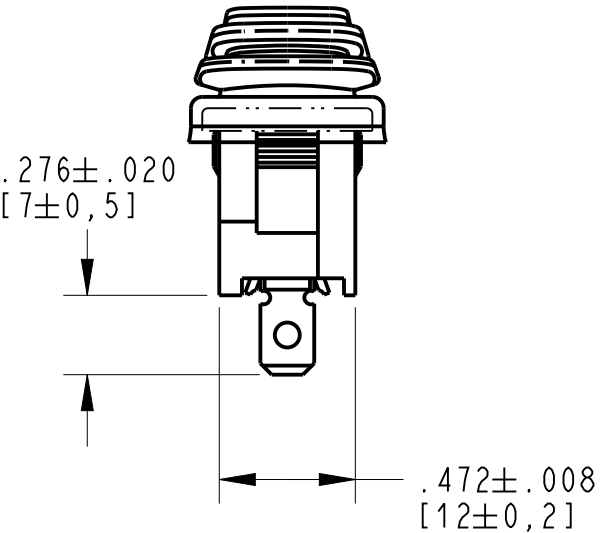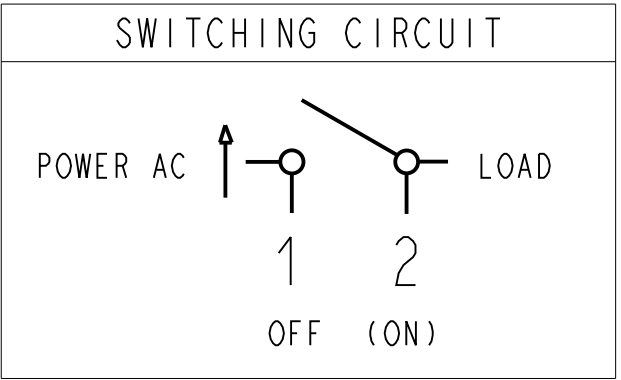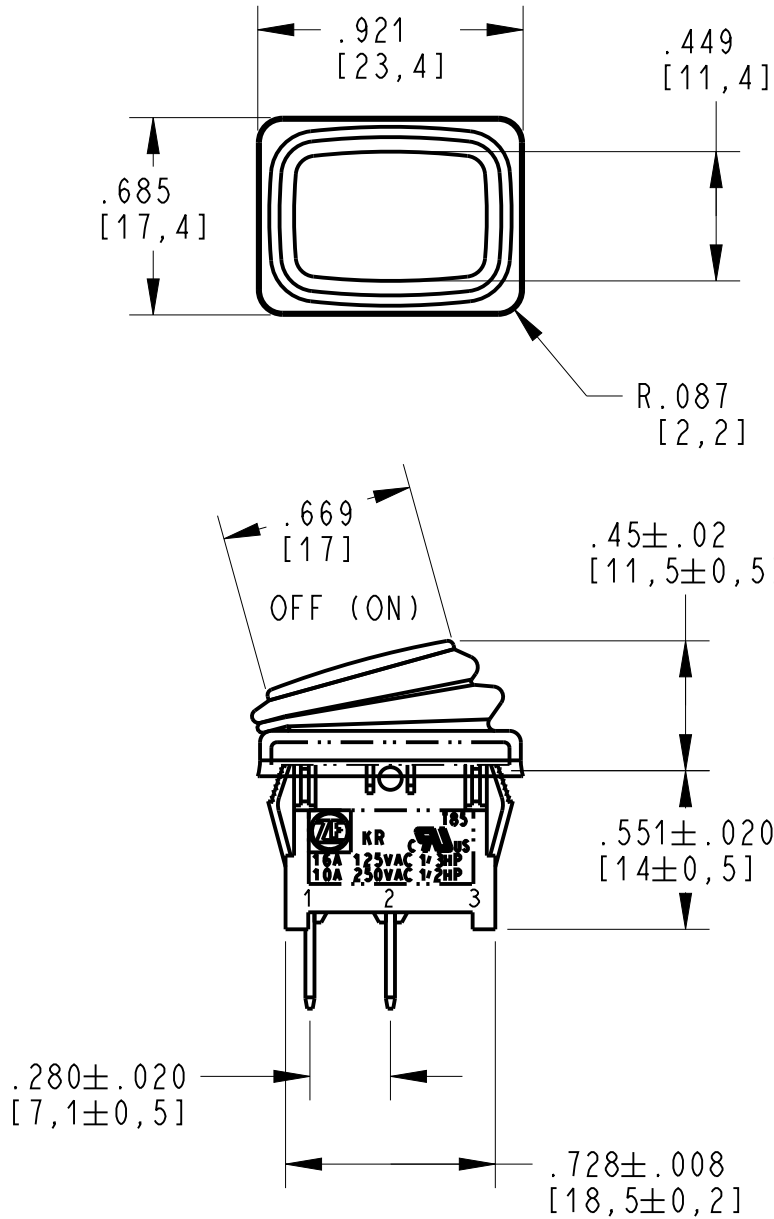

DWN: J. DOLNIK
APVD: JR
DATE: 20-May-08



PROJECT/ CSR
N/A

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KR-SPST (ON)-OFF NON LIGHTED

B ITEM NO. KRE2DNA1BBB

SCALE: 1:1.5 SH 1 OF 1

J	Z000437889	04-Jan-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

8 7 6 5 4 3 2 1

ORIGINAL ON PRO/E