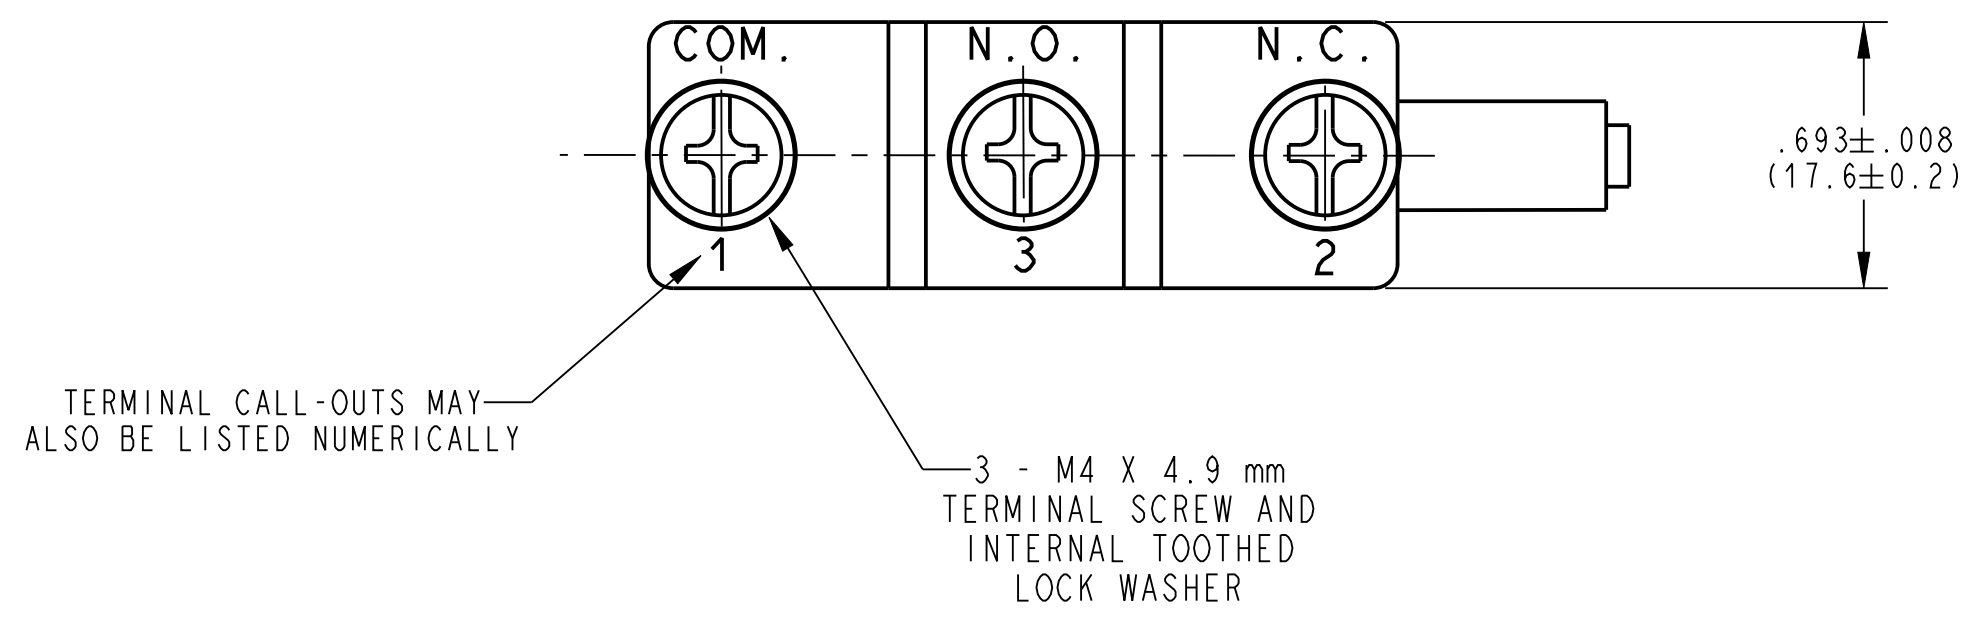




- NOTES (UNLESS OTHERWISE SPECIFIED): (E)
- 1 RECOMMENDED MOUNTING:  
#6-32 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
  - 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE  
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORITORIES, INC.
  - 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED  
FROM THE REFERENCE LINE.
  - 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.



CHARACTERISTICS	
ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE) -5T40
TERMINAL	SCREW
OPER. FORCE MAX.	100 GMS
RELEASE FORCE MIN.	22 GMS
PRETRAVEL MAX.	.280 [7.11 mm]
OVERTRAVEL MIN.	.158 [4.0 mm]
MOVE. DIFF. MAX.	.040 [1.02 mm]
OPERATING POSITION	1.157 TO 1.220 [29.4 TO 31.0 mm]

DWN: JED	CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.	 <b>ZF Electronic Systems</b> PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION				
APVD: SG						
DATE: 28-FEB-05						
THIRD ANGLE PROJECTION 						
TOLERANCE UNLESS SPECIFIED		C	ITEM NO.	GPTCRS11		
PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES	SCALE: 2:1	SH 1 OF 1
REV	ECO NO.	DATE	PREP	APVD		
E	Z000360155	2016-04-26	TLM	ELL		
4000000138						