


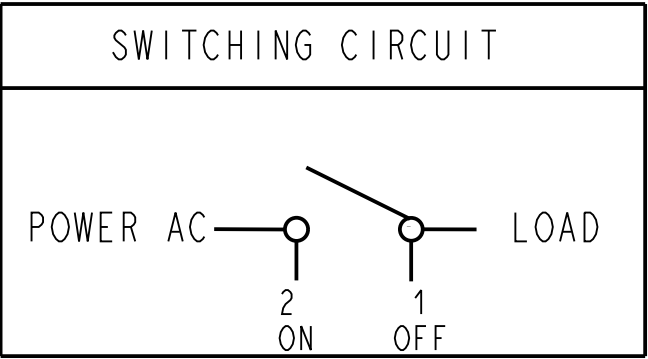

NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: TO BE MARKED ON HOUSING
20A, 125 VAC, 1/3 HP 
10A, 250VAC, 3/4 HP 
10(4)A 250VAC, μ T85 10E3  (G)

21A 14VDC (NOT AGENCY APPROVED)

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)

INSULATION RESISTANCE: 500VDC 100M Ω (MIN)


DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56 CAPABLE

DATE CODE FORMAT: YYWW


TERMINALS: .250 $\pm$.004[6.35 $\pm$ 0.1mm] X .031 $\pm$.002
[.8 $\pm$.03mm]. HOLE DIAMETER .090 [2.3]

TEMPERATURE: -20°C TO 85°C

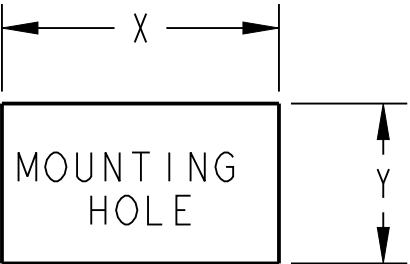


Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.03in TO .20in 0.75mm TO 5mm	1.45+.008/- .000in 36.8+0.2/-0.0mm	.6+.004/- .000in 15.2+0.1/-0.0mm

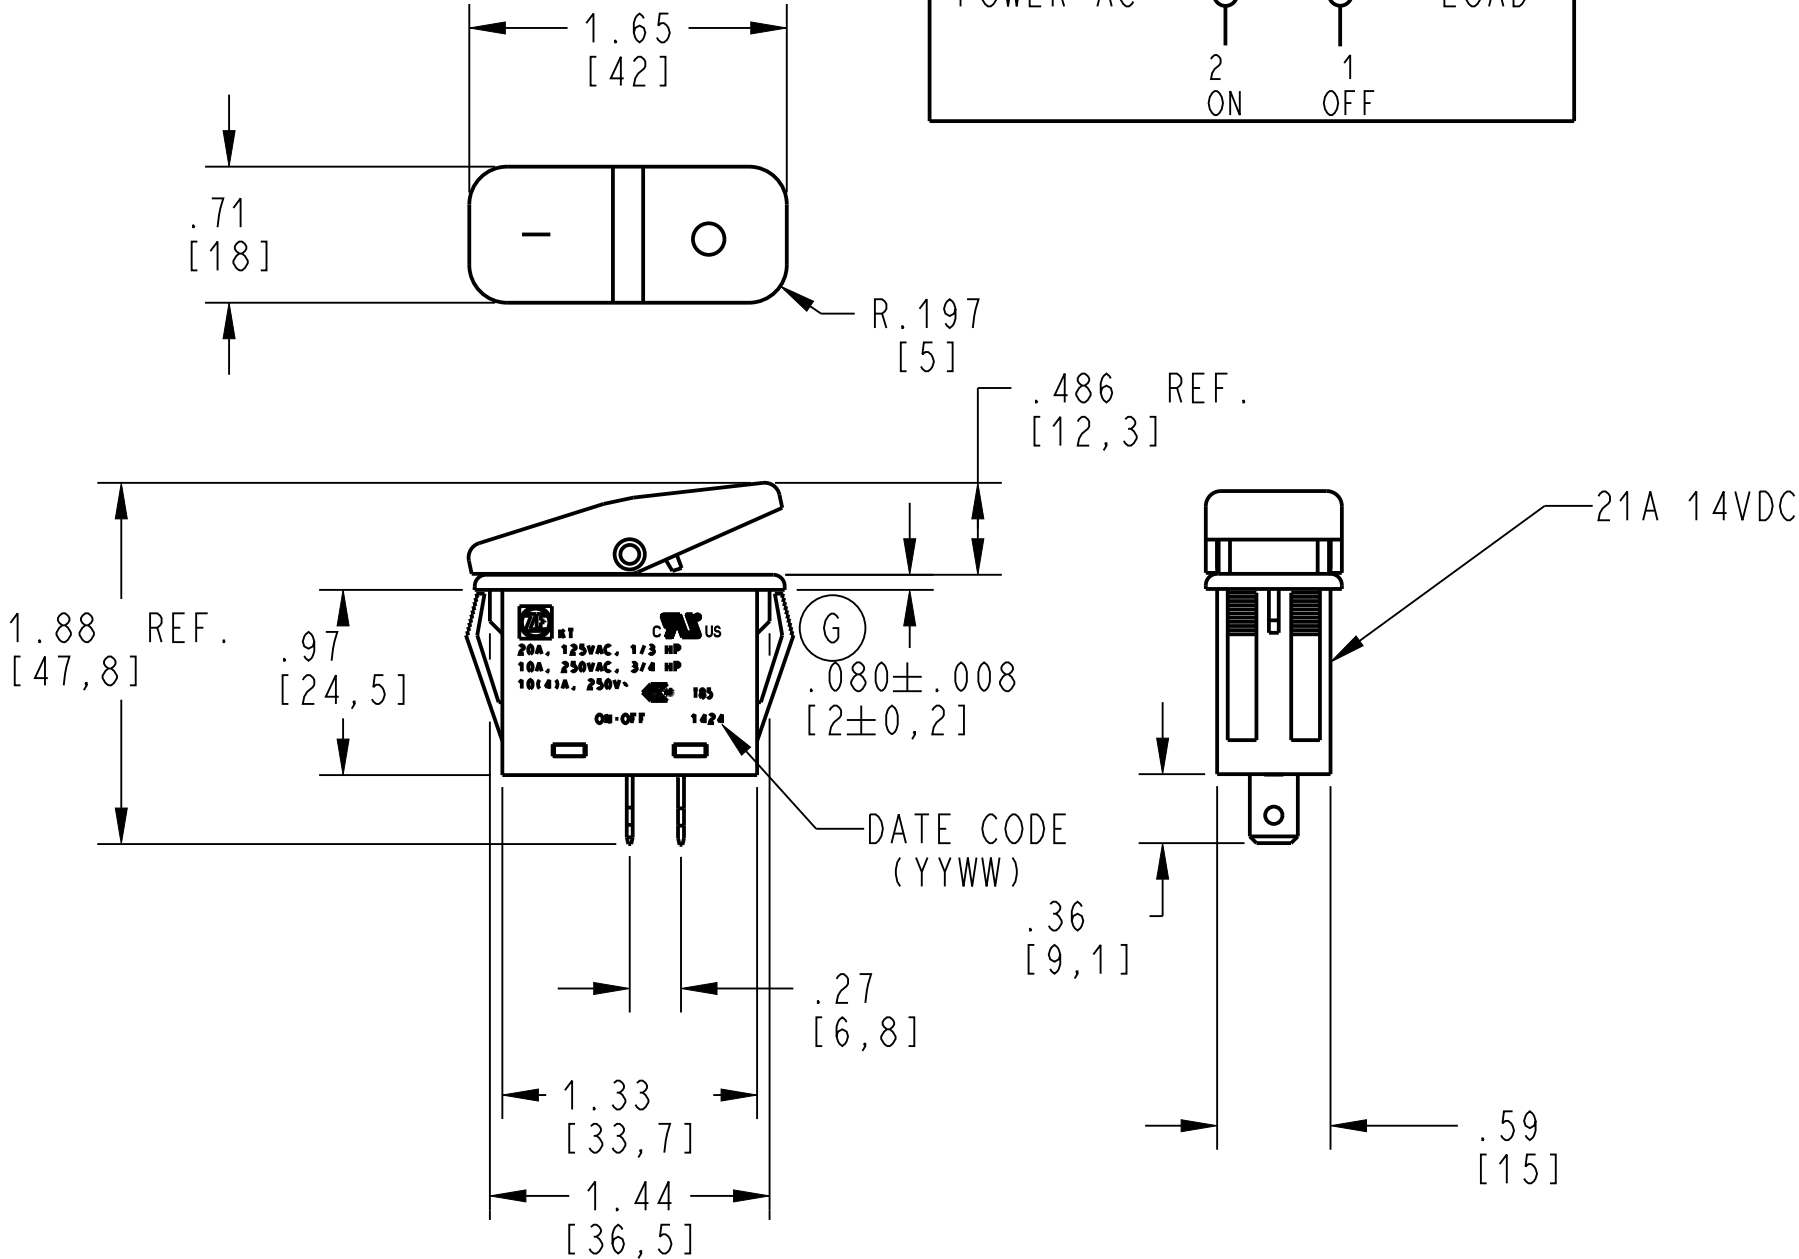

DWN: J. DOLNIK
APVD: ELL
DATE: 2025-01-16

THIRD ANGLE PROJECTION



CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KT-SPST ON-OFF NON LIGHTED

B ITEM NO. KTG2ANB1BBDNNN

SCALE: 1:1 SH 1 OF 1

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES (mm)	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5 °

G	Z000766945	2025-01-16	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
4000000138

ORIGINAL ON PROJE