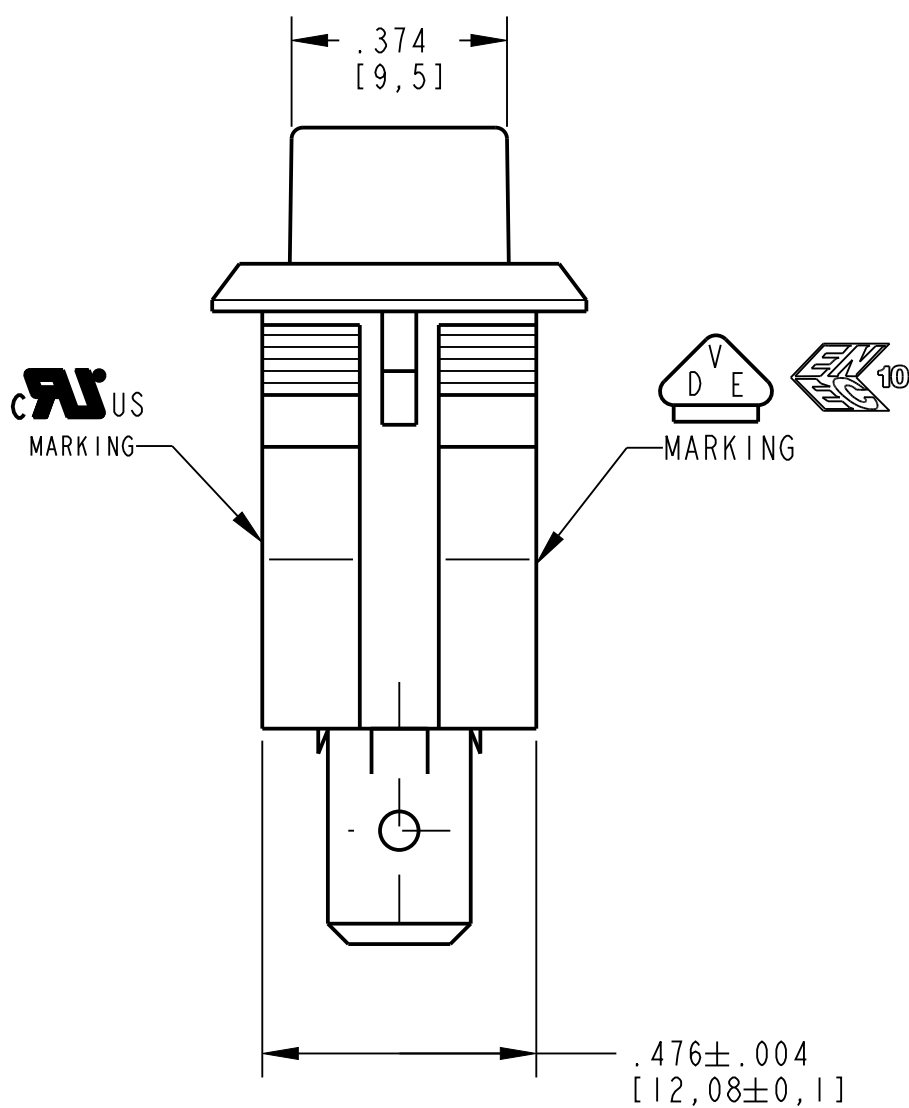
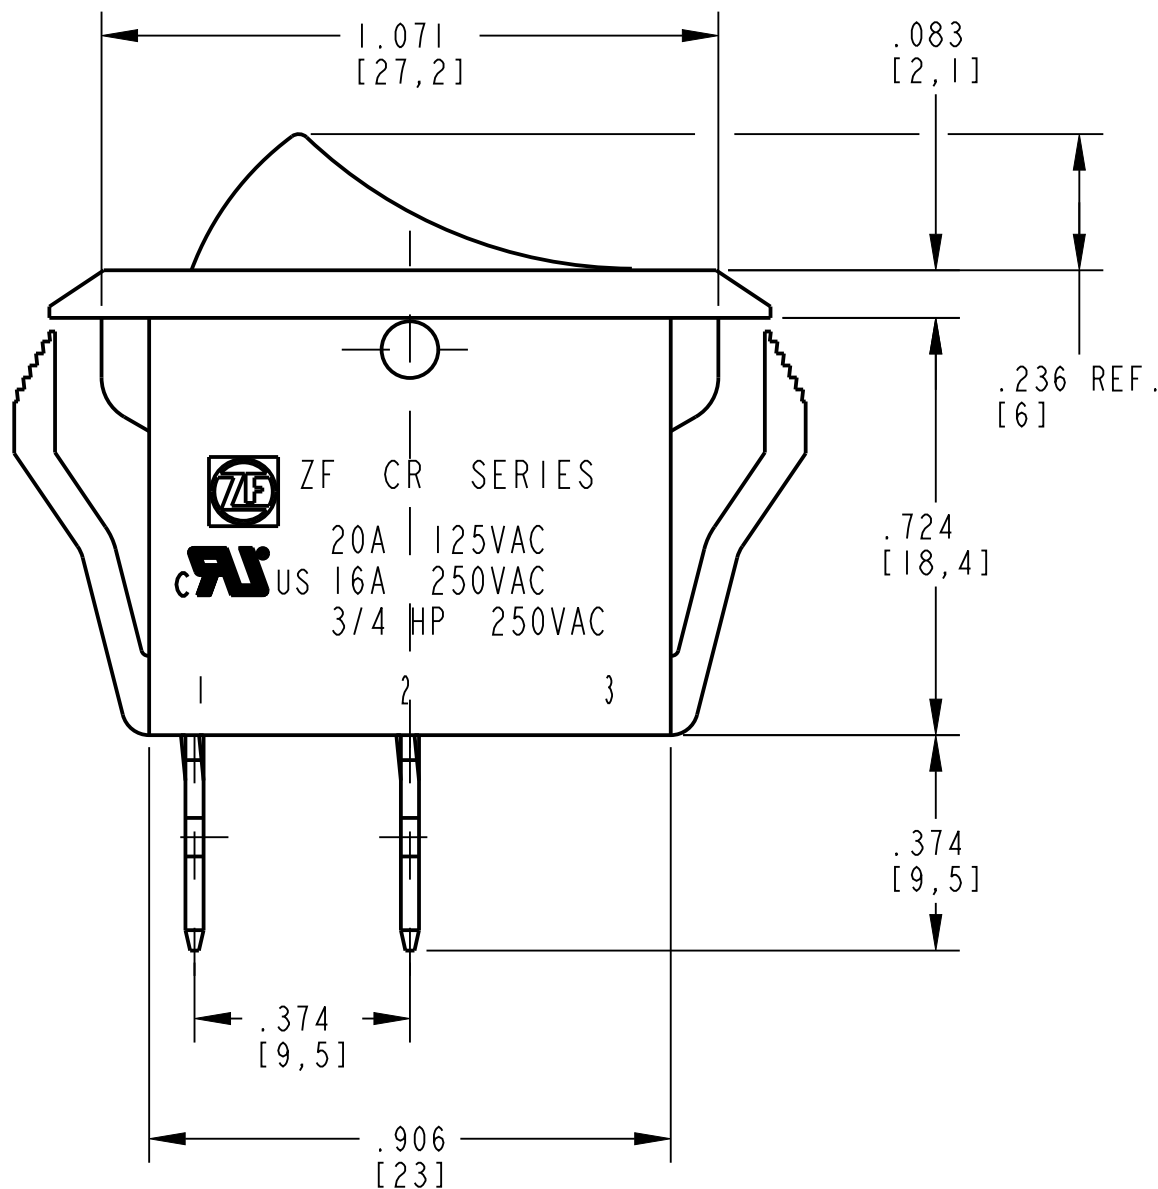
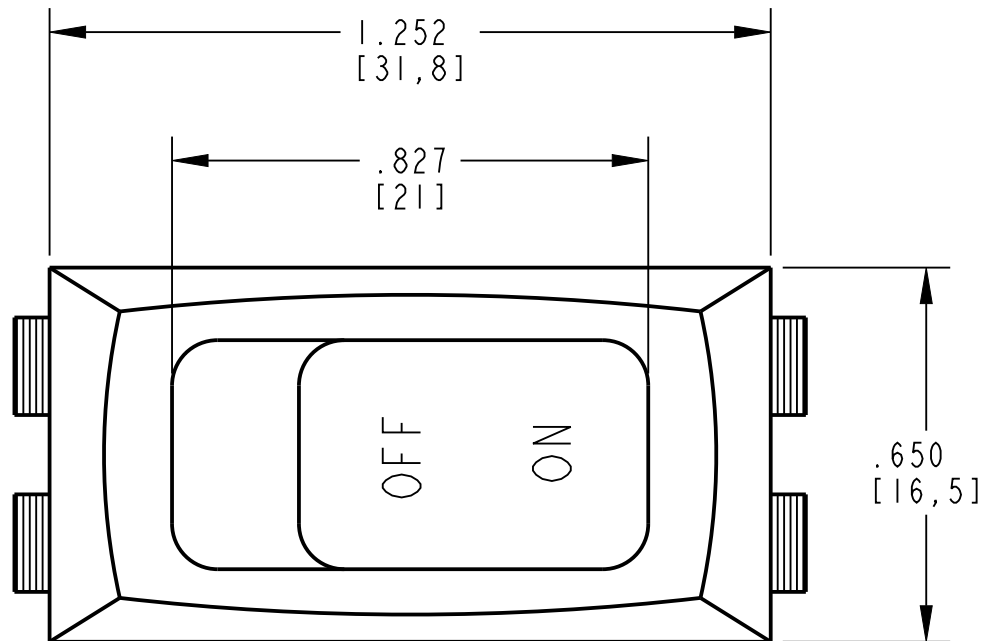




RECOMMENDED PANEL THICKNESS
.030 TO .049
[0.75mm TO 1.25 mm]



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON HOUSING
20A 125 VAC
16A, 250 VAC
3/4 HP 250 VAC
2. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.
4. INITIAL CONTACT RESISTANCE: 20m Ω MAX.
5. ELECTRICAL LIFE: 10,000 CYCLES
6. ACTUATOR COLOR: BLACK
HOUSING COLOR: BLACK
7. TERMINALS (3): QUICK CONNECT,
.250 WIDE x .031 THICK
HOLE DIAMETER .067.
8. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS
LABORATORIES, INC.
9. FOR NAMING AND MARKINGS SPECIFICATIONS SEE ES021255.

DWN: E. LESLIE		<div>CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.</div> <div><div></div><div>ZF Electronic Systems</div><div>PLEASANT PRAIRIE, WISCONSIN U.S.A.</div><div>NAME / DESCRIPTION</div><div>SPEC DRAWING</div></div>						
APVD: ELL								
DATE: 2025-08-19								
THIRD ANGLE PROJECTION								
<div></div>								
		TOLERANCE UNLESS SPECIFIED				C	ITEM NO. CRE22F2PBBNE	
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES			
N/A		INCH	± 0.02	± 0.012	± 5 °	SCALE:	3:1	SH 1 OF 1