


RECOMMENDED PANEL CUTOUT DIMENSIONS



DIM. Z	DIM. X	DIM. Y
.030 TO .049 (0.75 TO 1.25)	.535 ^{+0.00} _{-.004} (13.6 ^{+0.00} _{-0.10})	.362±.004 (9.2±0.10)
.049 TO .079 (1.25 TO 2.00)	.539 ^{+0.00} _{-.004} (13.7 ^{+0.00} _{-0.10})	.362±.004 (9.2±0.10)
.079 TO .098 (2.00 TO 2.50)	.543 ^{+0.00} _{-.004} (13.8 ^{+0.00} _{-0.10})	.362±.004 (9.2±0.10)

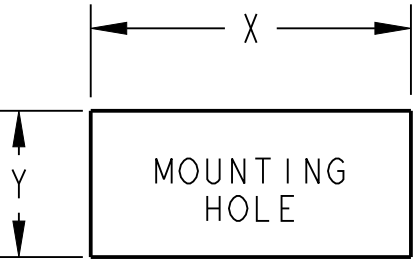




Z = PANEL THICKNESS

NOTES (UNLESS OTHERWISE SPECIFIED):

- DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE.
- INSULATION RESISTANCE: 100 MΩ MIN AT 500VDC
- INITIAL CONTACT RESISTANCE: 20 uΩ MAX.
- cus ELECTRICAL RATING:
6A 125VAC μ, 3A 250VAC μ
3A 250V~μT100/55 10E3
- TERMINAL TYPE SOLDER TAG
.146 (3.7±.1mm) WIDE X .020 (0.5mm) THICK
HOLE DIAMETER .059 (1.5mm)
- HOUSING AND ACTUATOR ARE COLOR BLACK.
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
- DIMENSION ARE IN DUAL INCHES [MM]

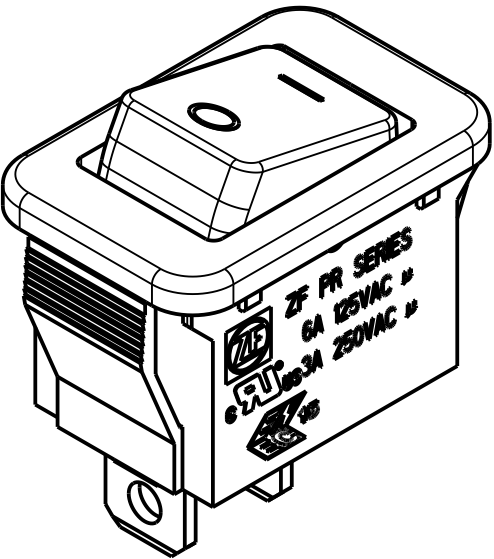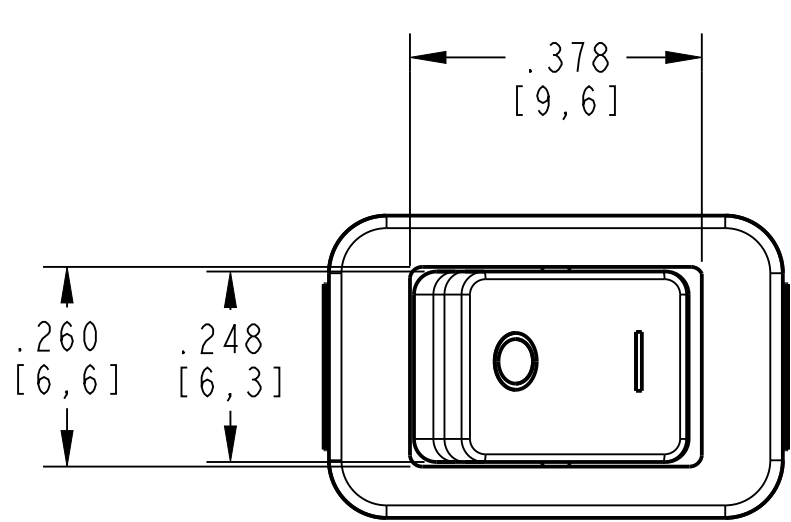

cus MARKINGS

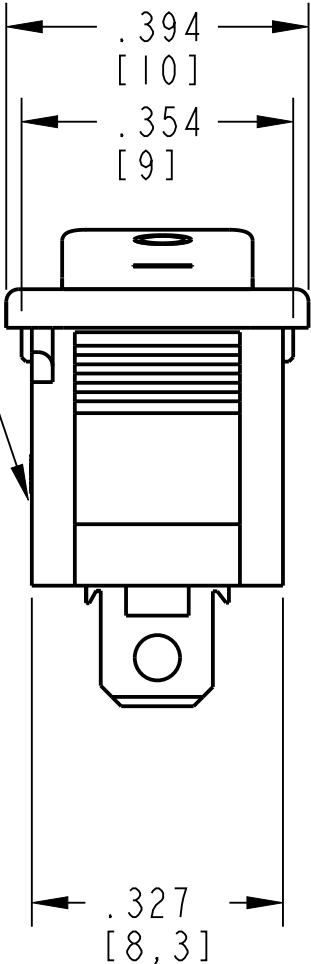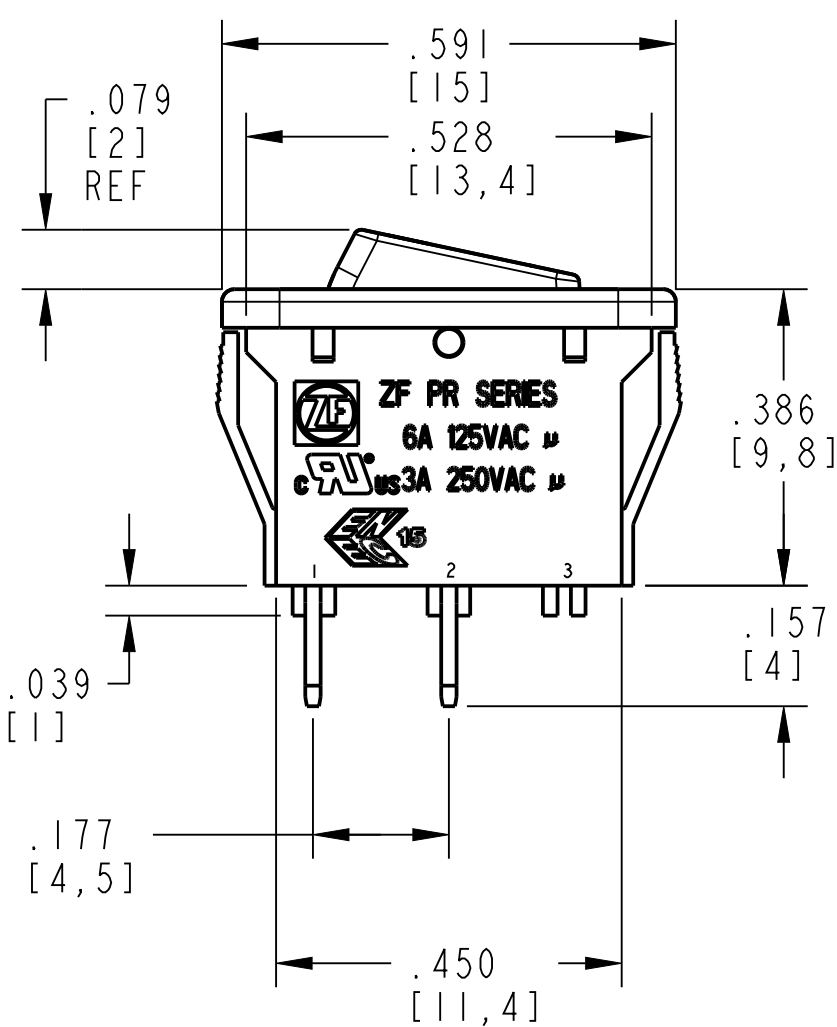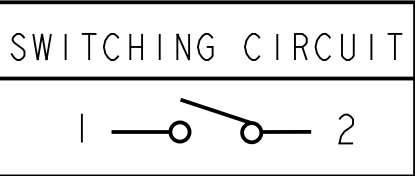


DWN: E. LESLIE

APVD: ell

DATE: 2025-08-12

THIRD ANGLE PROJECTION



PROJECT/ CSR

N/A

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

PRK SERIES

ITEM NO. PRK22J5EBBNN

SCALE: 4:1 SH 1 OF 1

A	Z00000000	2025-08-12	ell	ell
REV	ECO NO.	DATE	PREP	APVD