
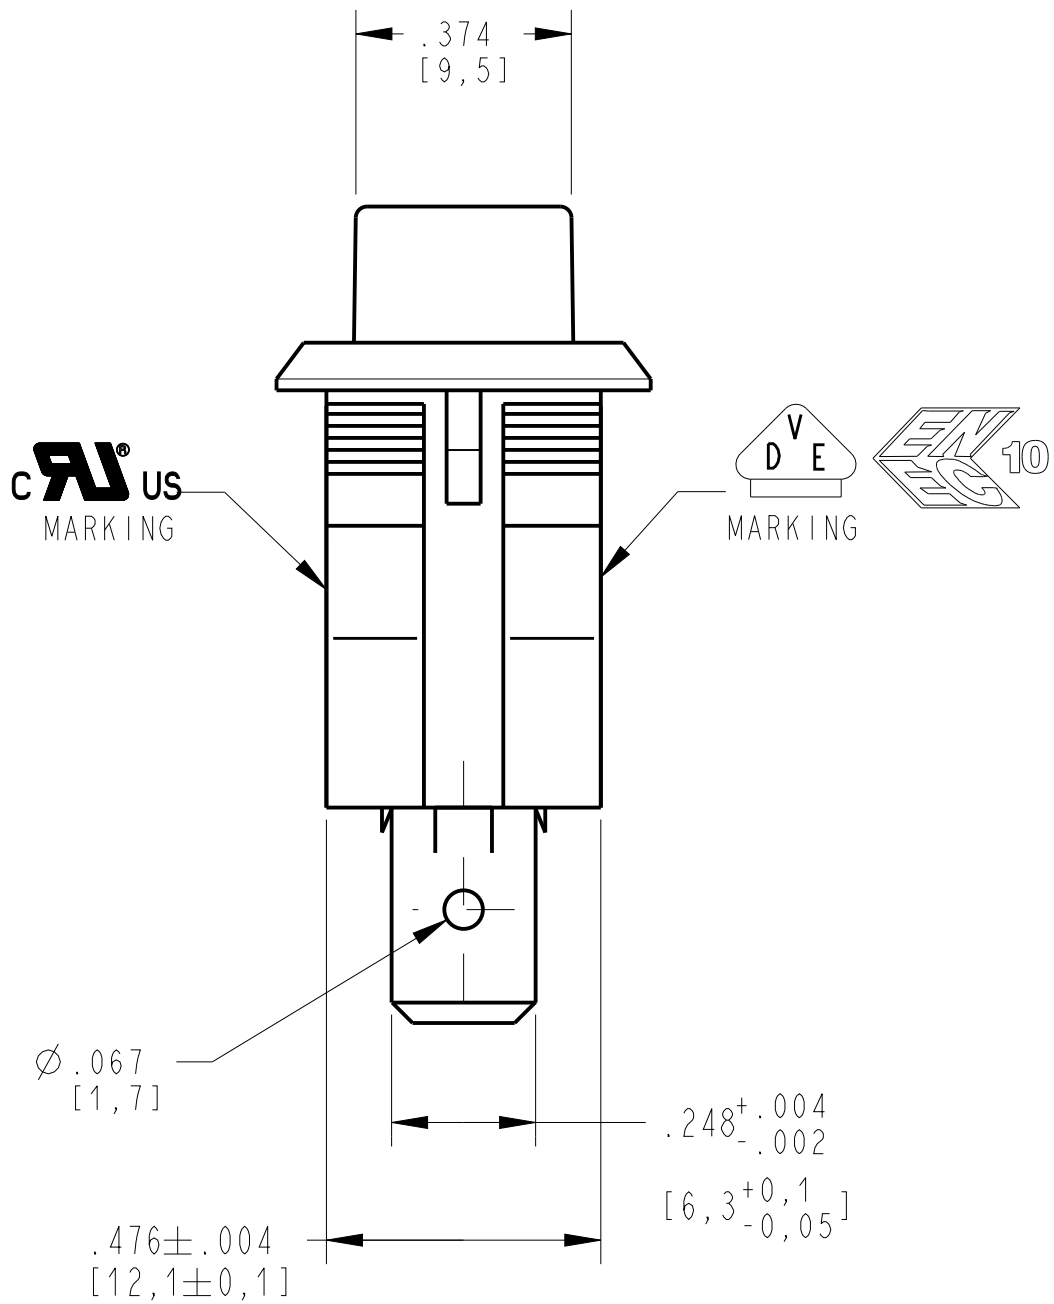
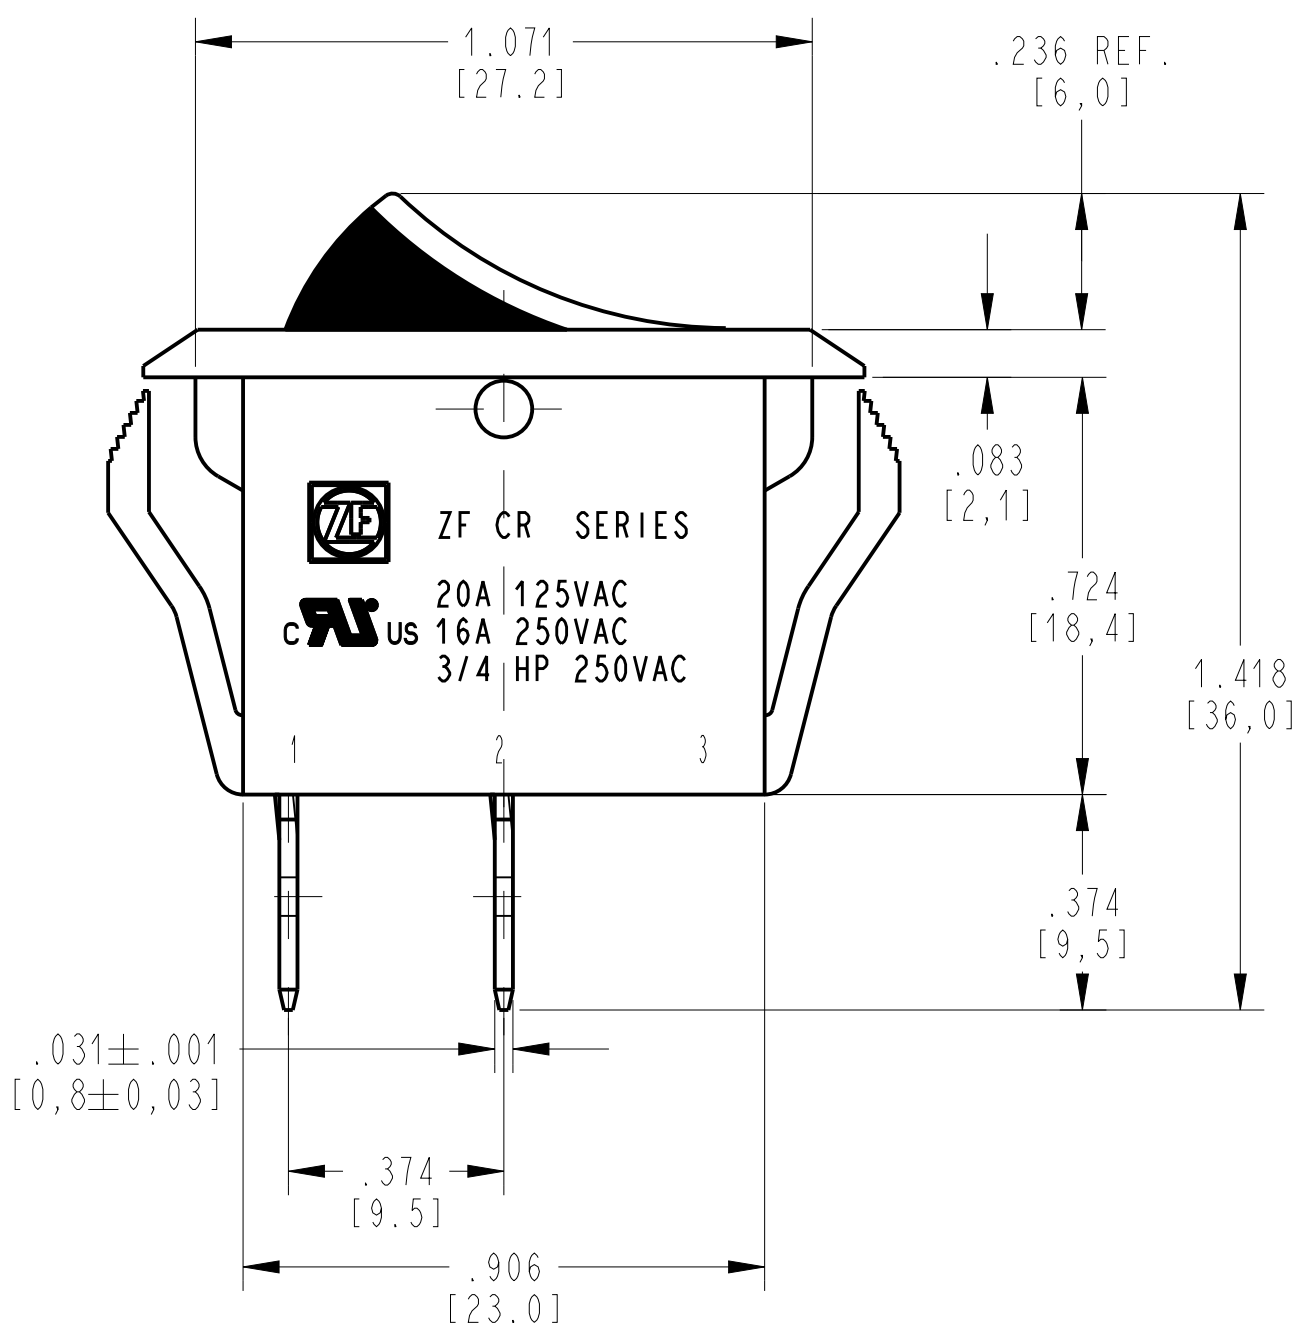


RECOMMENDED PANEL THICKNESS
.030 TO .049
[.75mm TO 1.125mm]

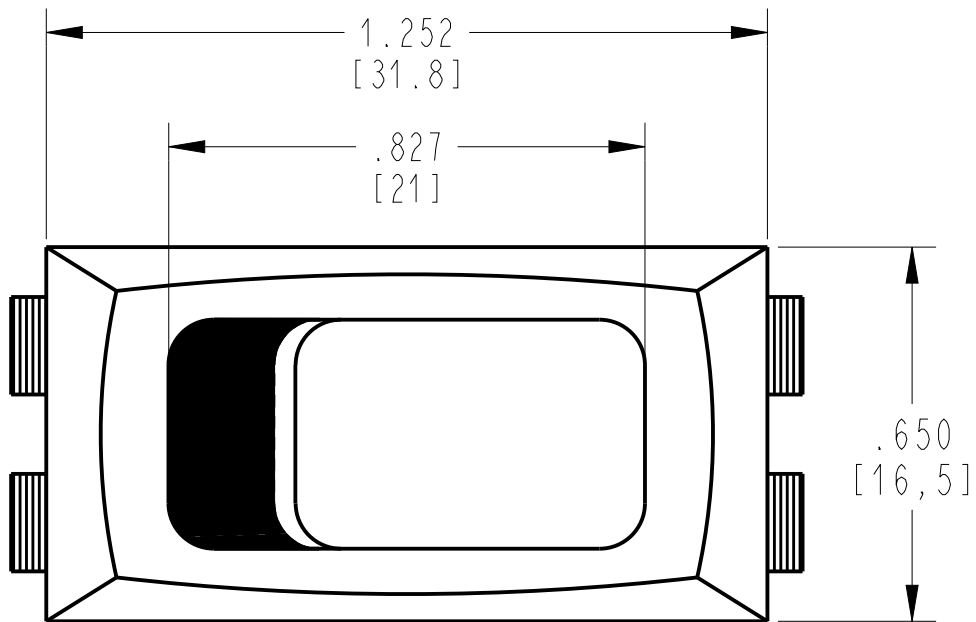

NOTES (UNLESS OTHERWISE SPECIFIED):

1. RATINGS TO BE MARKED ON HOUSING

20A, 125VAC
16A, 250VAC
3/4 HP 250VAC



16(4)A 250V ~ T125/55 10E3

2. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE

3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.



4. INITIAL CONTACT RESISTANCE: 20m Ω MAX.

5. DATE CODE FORMAT:

TWO DIGIT WEEK, ONE DIGIT YEAR AND MANUFACTURE LOCATION.
MANUFACTURE LOCATION REPRESENTED BY S - SHIJIE DONGGUAN, CHINA.
EXAMPLE: WEEK 14 YEAR 2013 = 143S.

6. FOR NAMING AND MARKING SPECIFICATIONS SEE ES021255.

7. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

DWN: JPD		<div>CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.</div>				<div><div>ZF Electronic Systems</div><div>PLEASANT PRAIRIE, WISCONSIN U.S.A.</div></div>		
APVD: ELL								
DATE: 06-Dec-17								
THIRD ANGLE PROJECTION								
<div></div>						NAME / DESCRIPTION		
						CR-SERIES-SINGLE THROW, QC, TWO COLOR, NON-LIGHTED		
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED				C	ITEM NO. CRE22F4BBBNE	
		DWG UNITS	X.XX	X.XXX	ANGLES			
N/A		INCHES	± 0.02	± 0.012	± 5.0 °	SCALE:	N/A	SH 1 OF 1