
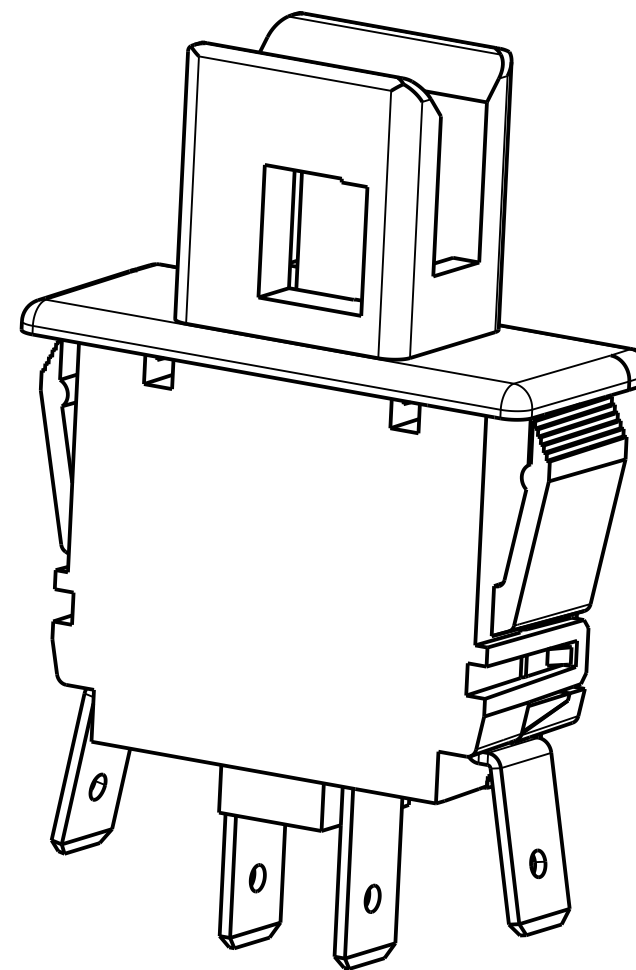


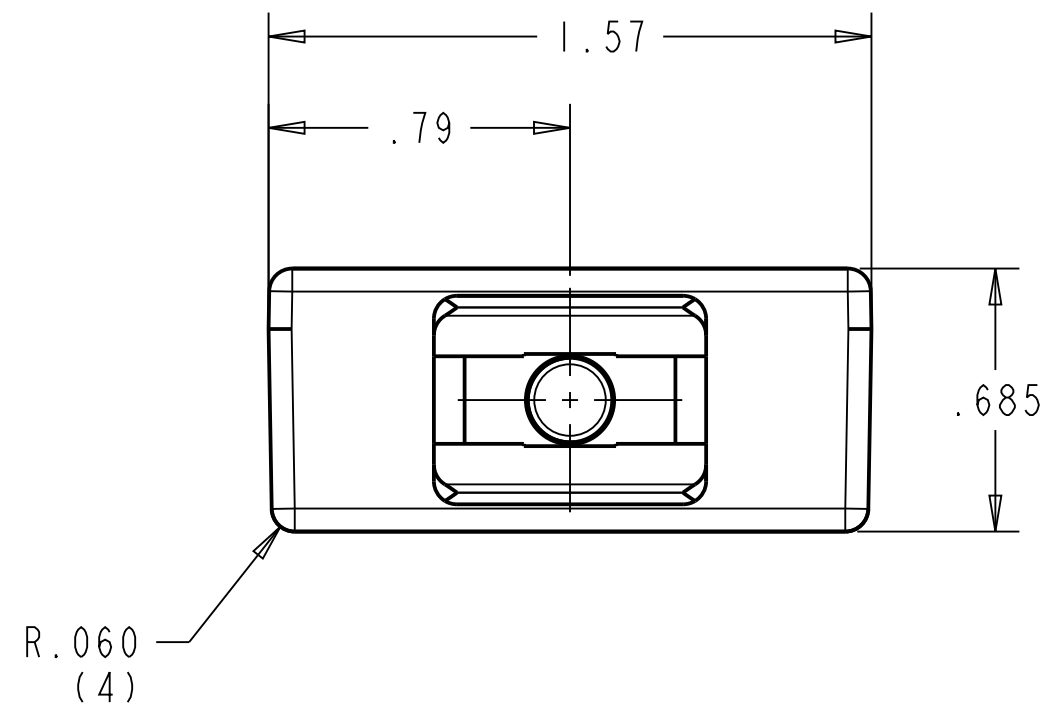

NOTES (UNLESS OTHERWISE SPECIFIED):

- SWITCH CHARACTERISTICS
 - REST POSITION .551 MAX.
 - PRE-TRAVEL .236 MAX.
 - OPERATING POSITION .315 TO .393
 - OVER TRAVEL .079 MIN.
 - OPERATING FORCE grams 866 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE

- ELECTRICAL RATING
 - 16A, 125/250 VAC
 - 3/4 HP 125 VAC
 - 1-1/2 HP 250 VAC
 - 6A, 30 VDC

- VDE APPROVED :
16(6)A 250 VAC, 25T85, 50E3.

- TERMINALS
NO TERMINALS .250 WIDTH x .032 THICKNESS.


- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

- TEMPERATURE RANGE -25°C TO +85°C.



- PRETRAVEL & OPER FORCE ARE WHEN BOTH N.O. POLES MAKE.

- ELECTRICAL LIFE AT RATED LOAD:
100,000 CYCLES MARKED WITH (L).

1.445^{+.005}_{-.000} FOR .045 THK. PANEL
1.455^{+.010}_{-.000} FOR .100 THK. PANEL

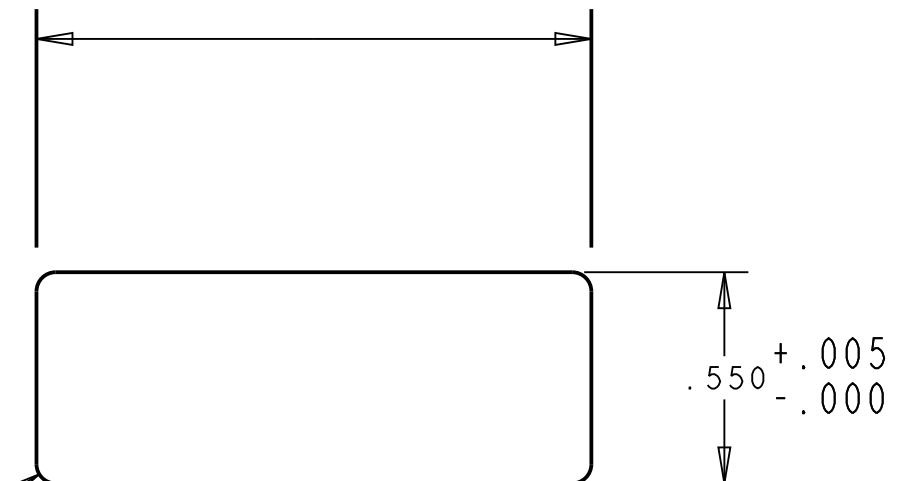


PANEL CUTOUT DETAIL
RCOMMENDED
PANEL THICKNESS
.045-.100

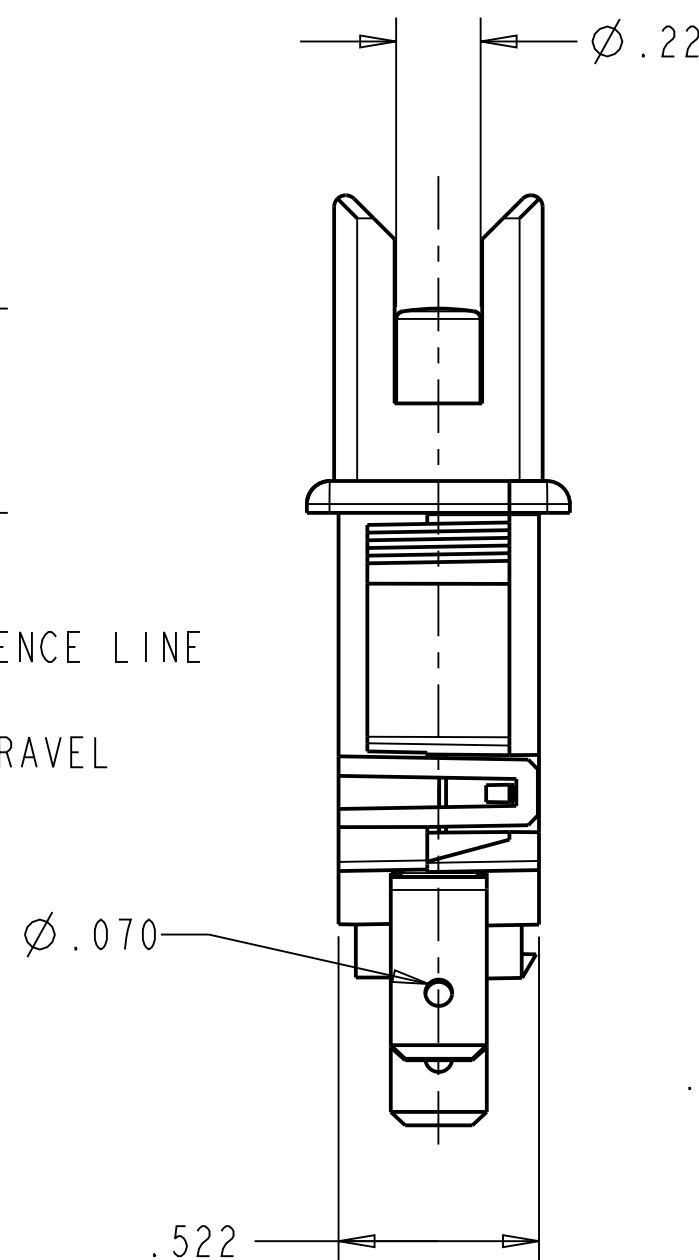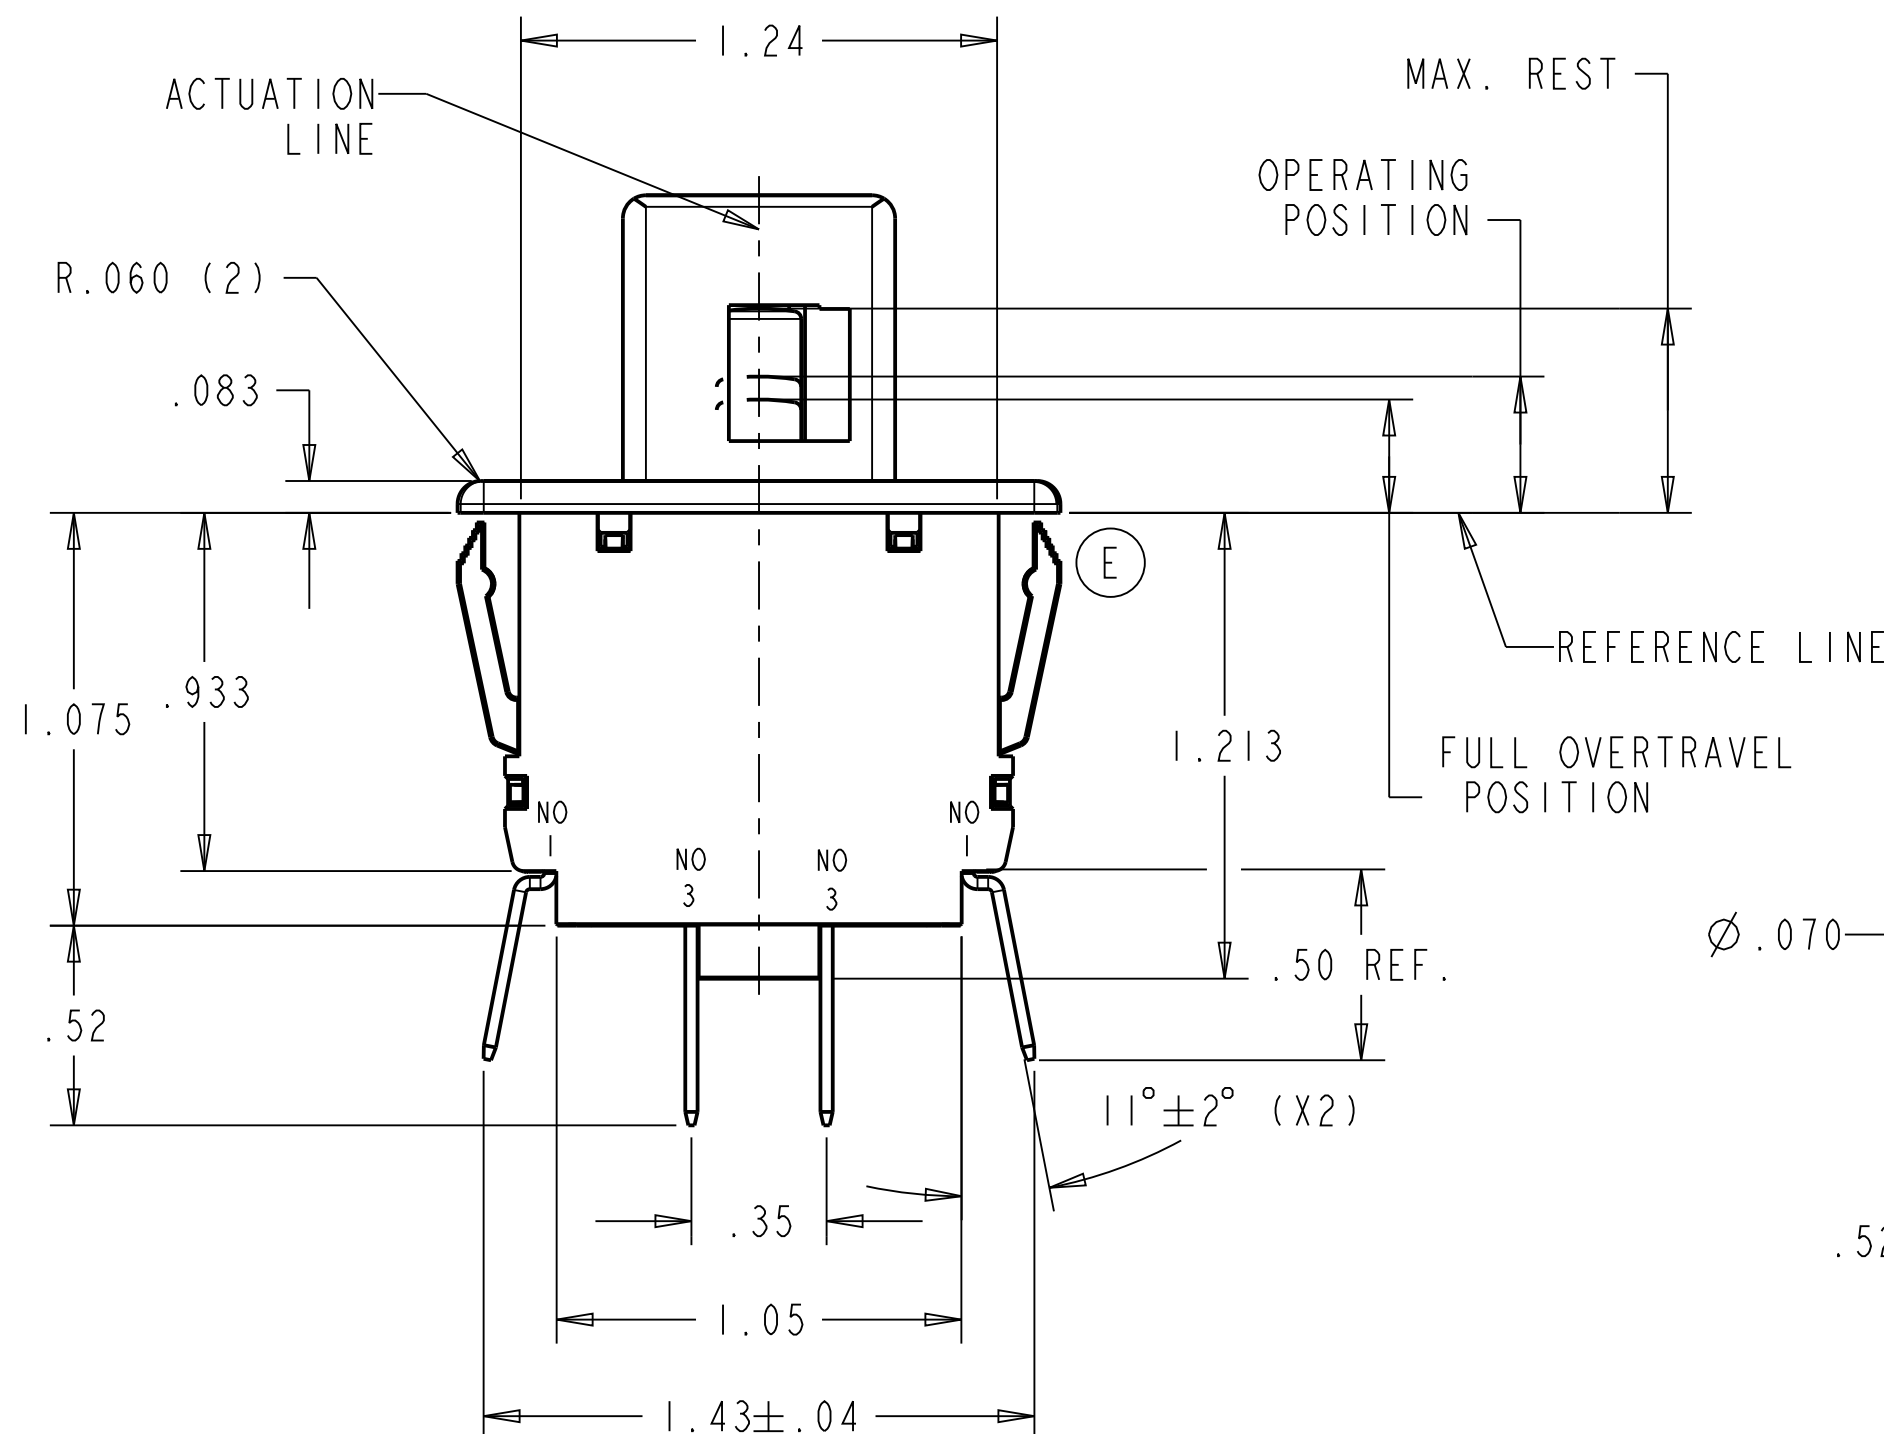

DWN: J. DOLNIK
APVD: ELL
DATE: 2025-08-20

THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC. DRAWING

E	Z000377838	2025-08-20	TLM	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
4000000138	INCHES	± 0.02	± 0.015	± 5.0 °

C	ITEM NO.	F82A-B120
SCALE:	1.000	SH 1 OF 1

ORIGINAL ON PROJE