


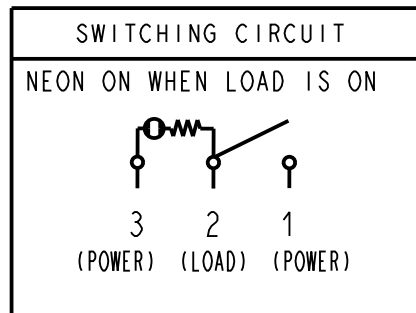
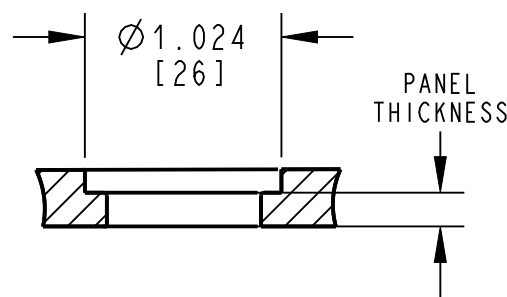


- NOTES:
1. RATING TO BE MARKED ON HOUSING
16A, 125VAC; 10A, 250VAC
 2. INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
 3. INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)
 4. DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.
 5. WATERPROOF: IP65 CAPABLE. RUBBER SILICONE COLOR: BLACK
 6. OPERATION TEMPERATURE: -25°C TO +85°C
 7. LIGHTED: DEPENDENT; NEON BULB RATED AT 220VAC.
 8. ACTUATOR: RED CLEAR
 9. TERMINALS: SILVER-PLATED, COPPER ALLOY #3 (FOR LAMP) IS BRASS CLEAN.

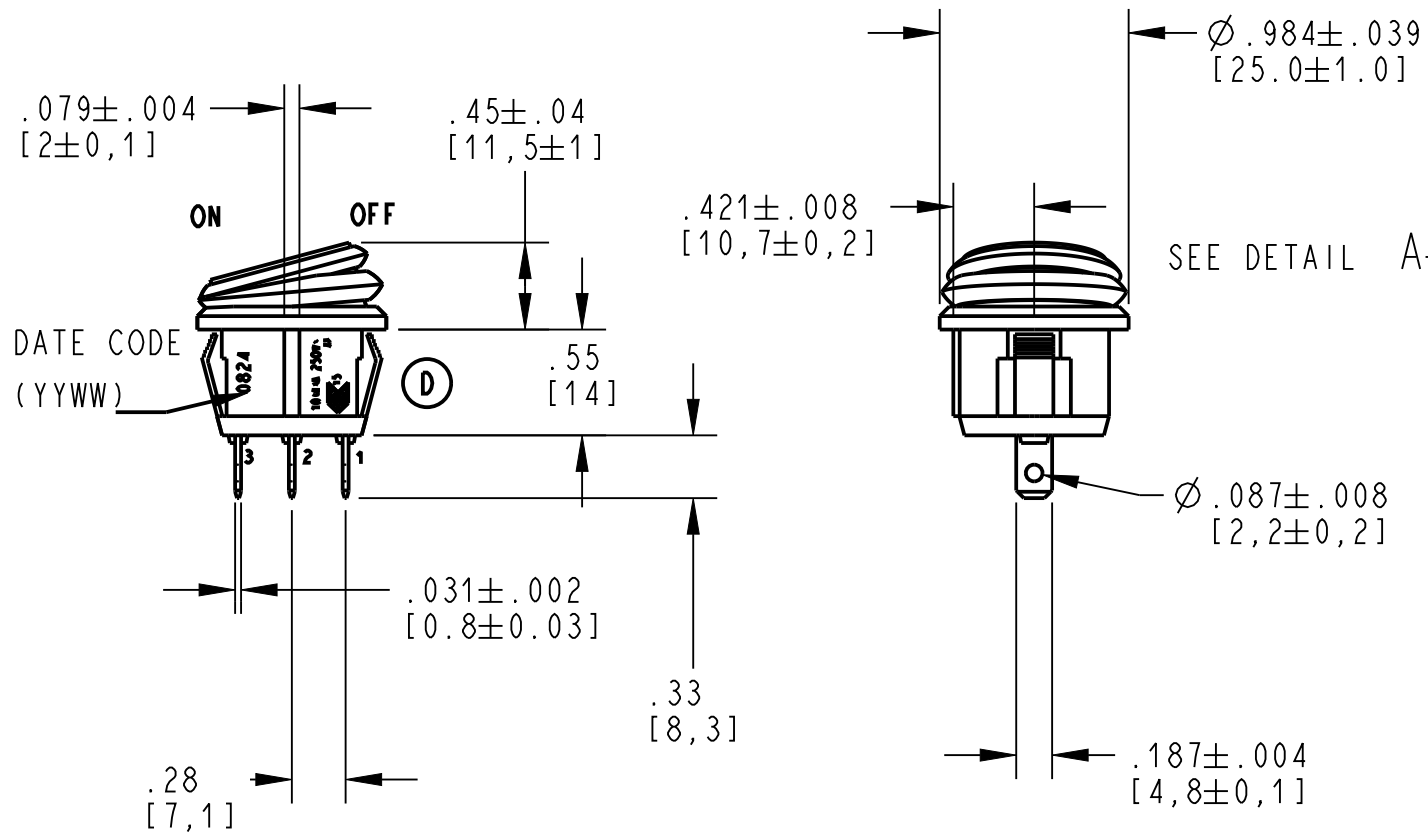

DETAIL A
SCALE 2:1

MOUNTING HOLES

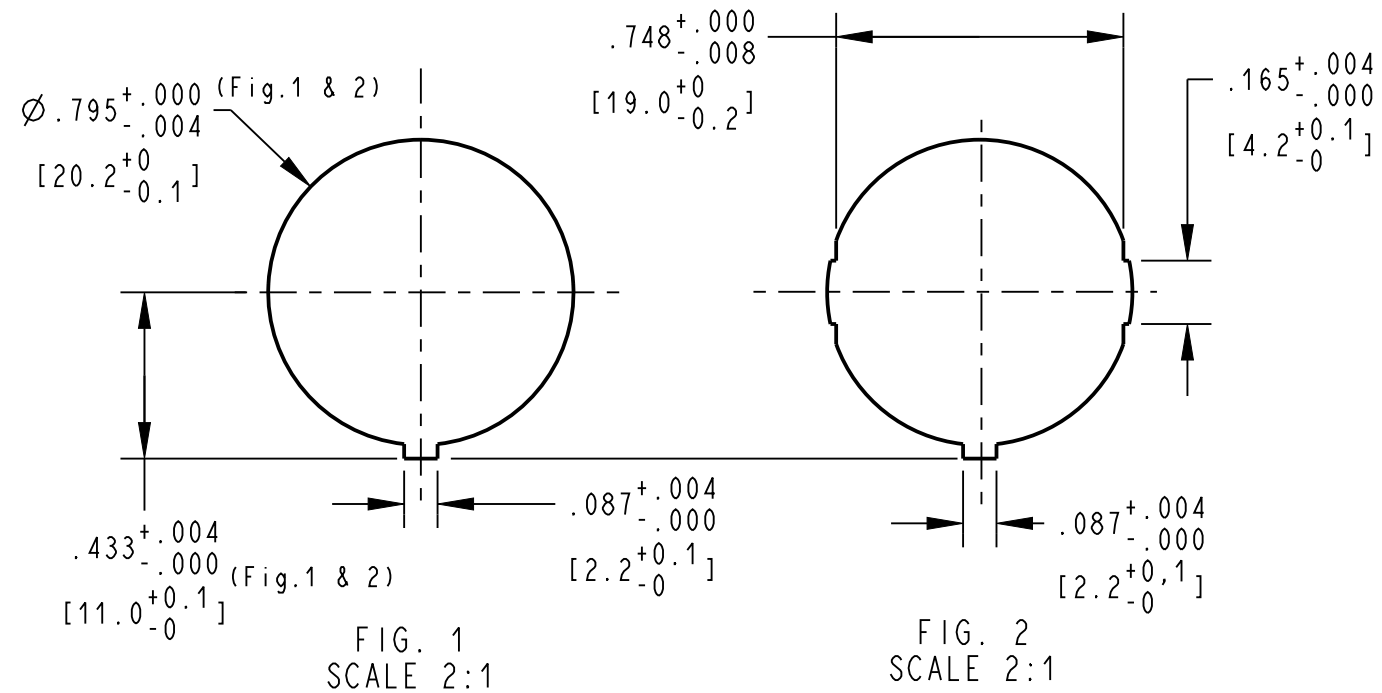

MOUNTING HOLES	
FIG.	PANEL THICKNESS
1	.059 TO .098 [1.5 TO 2.5]
2	.028 TO .098 [0.7 TO 2.5]

D	Z000766945	2025-01-15	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: C. RAMOS				PLEASANT PRAIRIE, WISCONSIN U.S.A.	
APVD: J. RUMMELHART					
DATE: 16-Jun-08					
THIRD ANGLE PROJECTION		TOLERANCE UNLESS SPECIFIED		NAME / DESCRIPTION	
		PROJECT/ CSR		KC-SPST ON-OFF LIGHTED	
		N/A		B ITEM NO. KCA2AEA2RBB	
INCHES (mm)		X.XX	X.XXX	SCALE: 1:1	
± 0.02		± 0.012	± 5 °	SH 1 OF 1	