


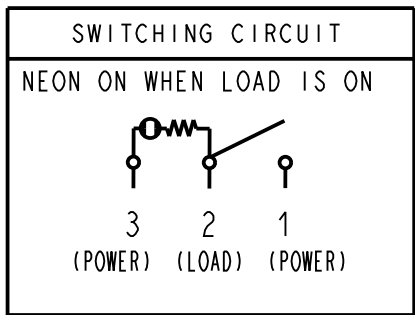

DETAIL A
SCALE 2:1

NOTES:

1. RATING TO BE MARKED ON HOUSING

16A, 125VAC
10A, 250VAC



(H) 10(4)A, 250VAC ~ μ T85/55 10E3



2. INITIAL CONTACT RESISTANCE: 50m Ω (MAX)

3. INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)

4. DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.

5. WATERPROOF: IP65 CAPABLE. RUBBER SILICONE COLOR: BLACK






6. OPERATION TEMPERATURE: -25°C TO +85°C

7. LIGHTED: DEPENDENT; NEON BULB RATED AT 110VAC.

8. ACTUATOR: RED CLEAR

9. TERMINALS: SILVER-PLATED, COPPER ALLOY #3 (FOR LAMP)
IS BRASS CLEAN.


MOUNTING HOLES

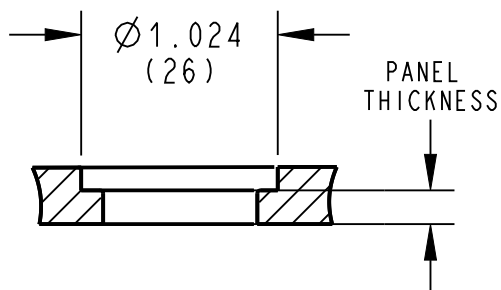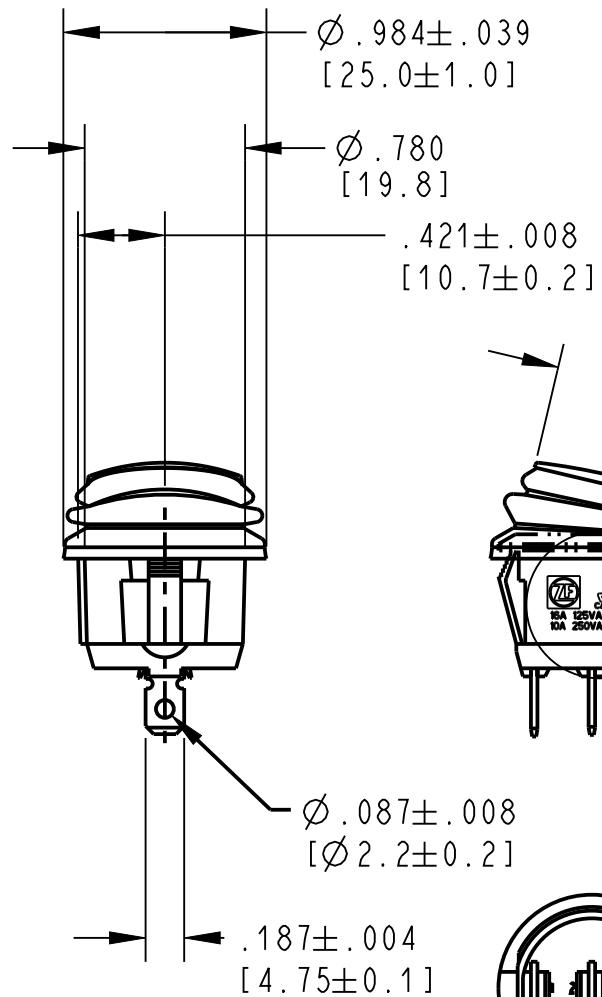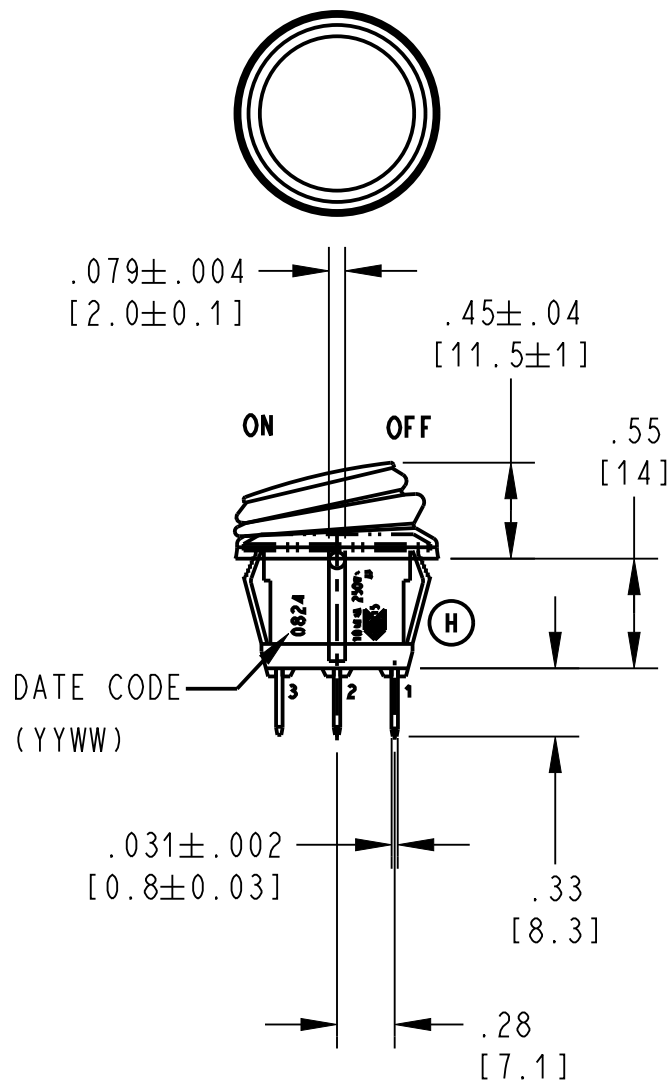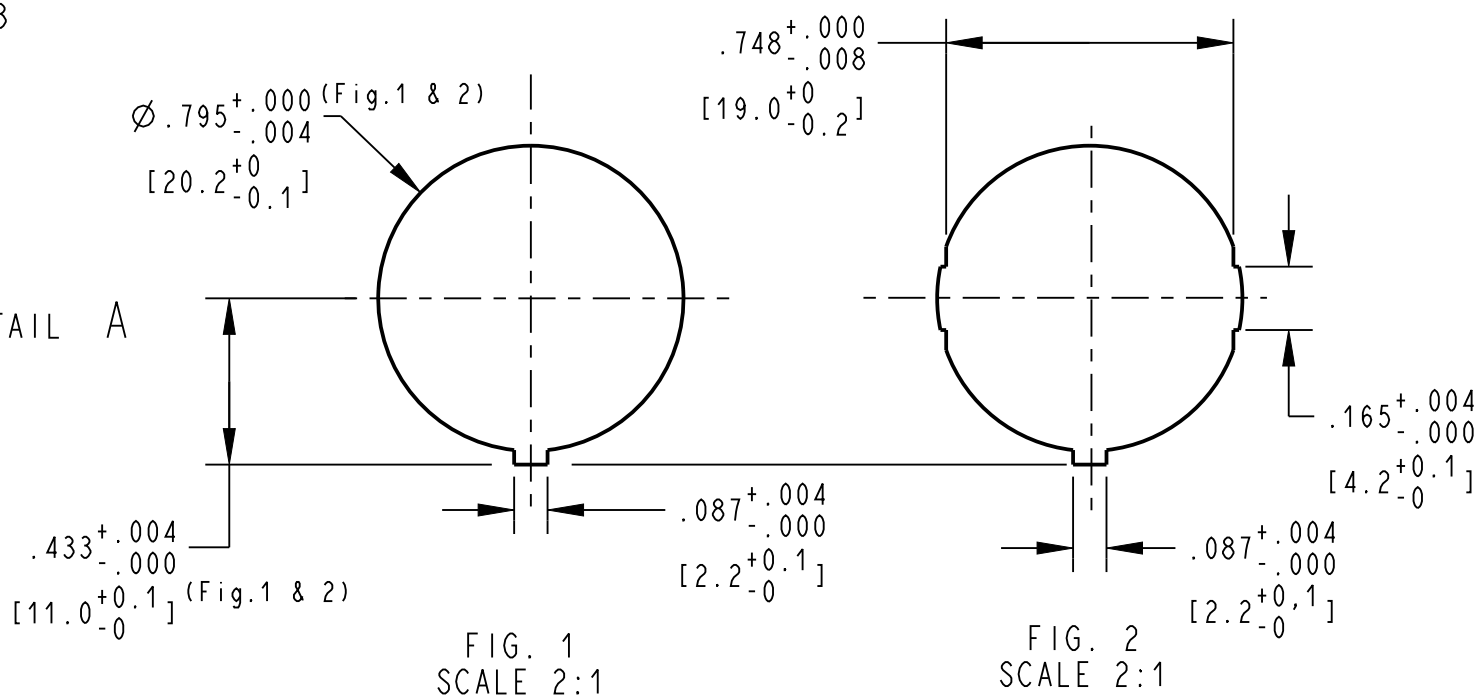

MOUNTING HOLES	
FIG.	PANEL THICKNESS
1	.059 TO .098 [1.5 TO 2.5]
2	.028 TO .098 [0.7 TO 2.5]

H	Z000766945	2025-01-16	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: C. RAMOS
APVD: J. RUMMELHART
DATE: 16-Jun-08
THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES (mm)	± 0.02	± 0.012	$\pm 5^\circ$



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME/ DESCRIPTION

KC-SPST ON-OFF LIGHTED

B ITEM NO. KCA2ALA2RBB
SCALE: 1:1 SH 1 OF 1