

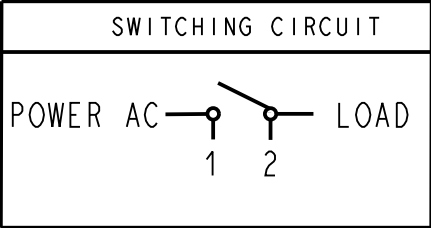
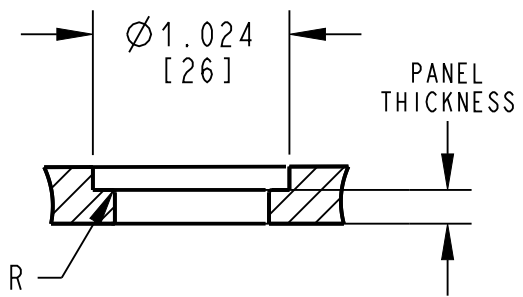
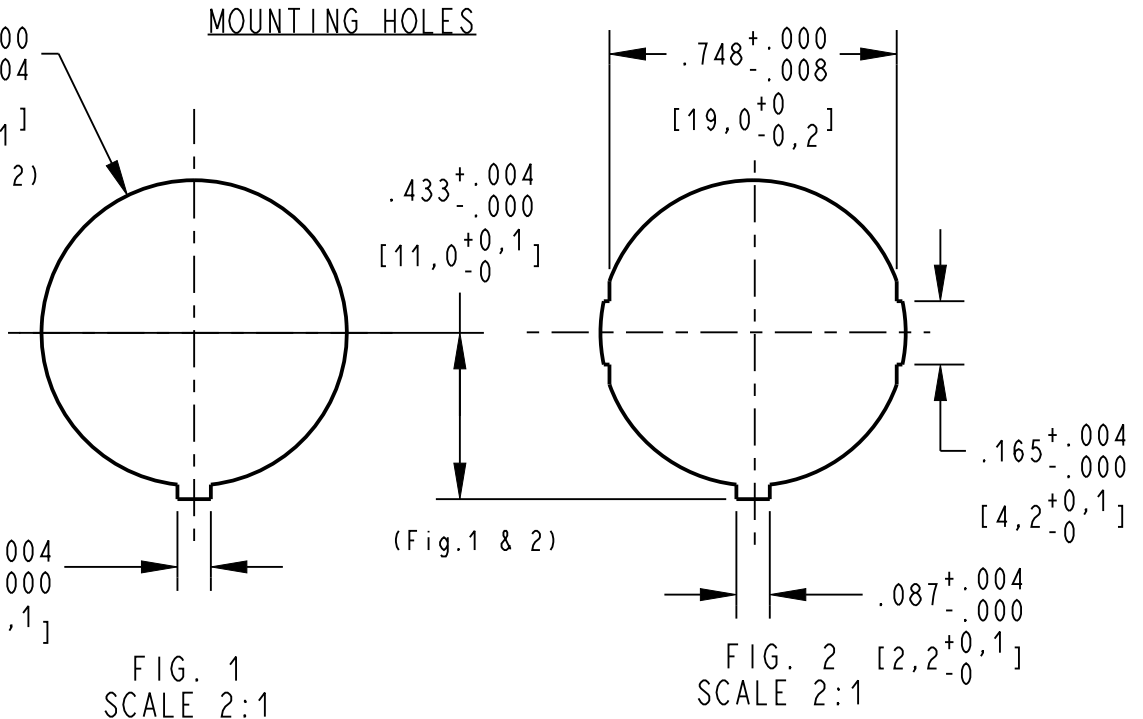


DETAIL A
SCALE 2:1

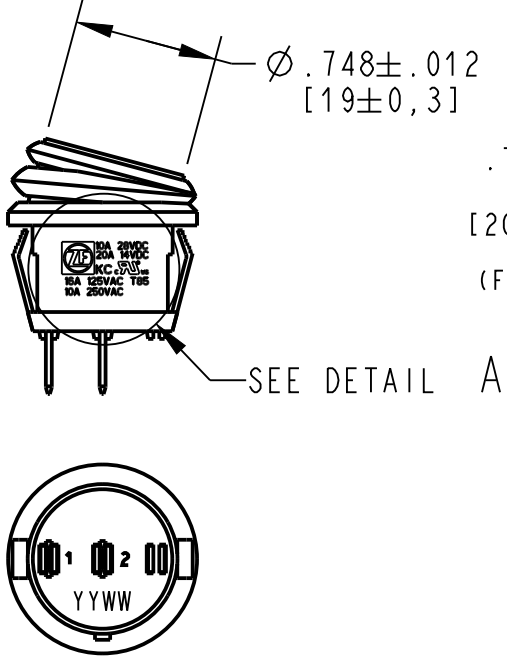

- NOTES:
- RATING TO BE MARKED ON HOUSING
16A, 125VAC US
10A, 250VAC
10(4)A, 250VAC ~ μ T85/55 10E3 (J)
20A 14VDC, 10A 28VDC US
 - INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
 - INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)
 - DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.
 - WATERPROOF: IP65 CAPABLE. RUBBER SILICONE COLOR: BLACK
 - OPERATION TEMPERATURE: -25°C TO +85°C

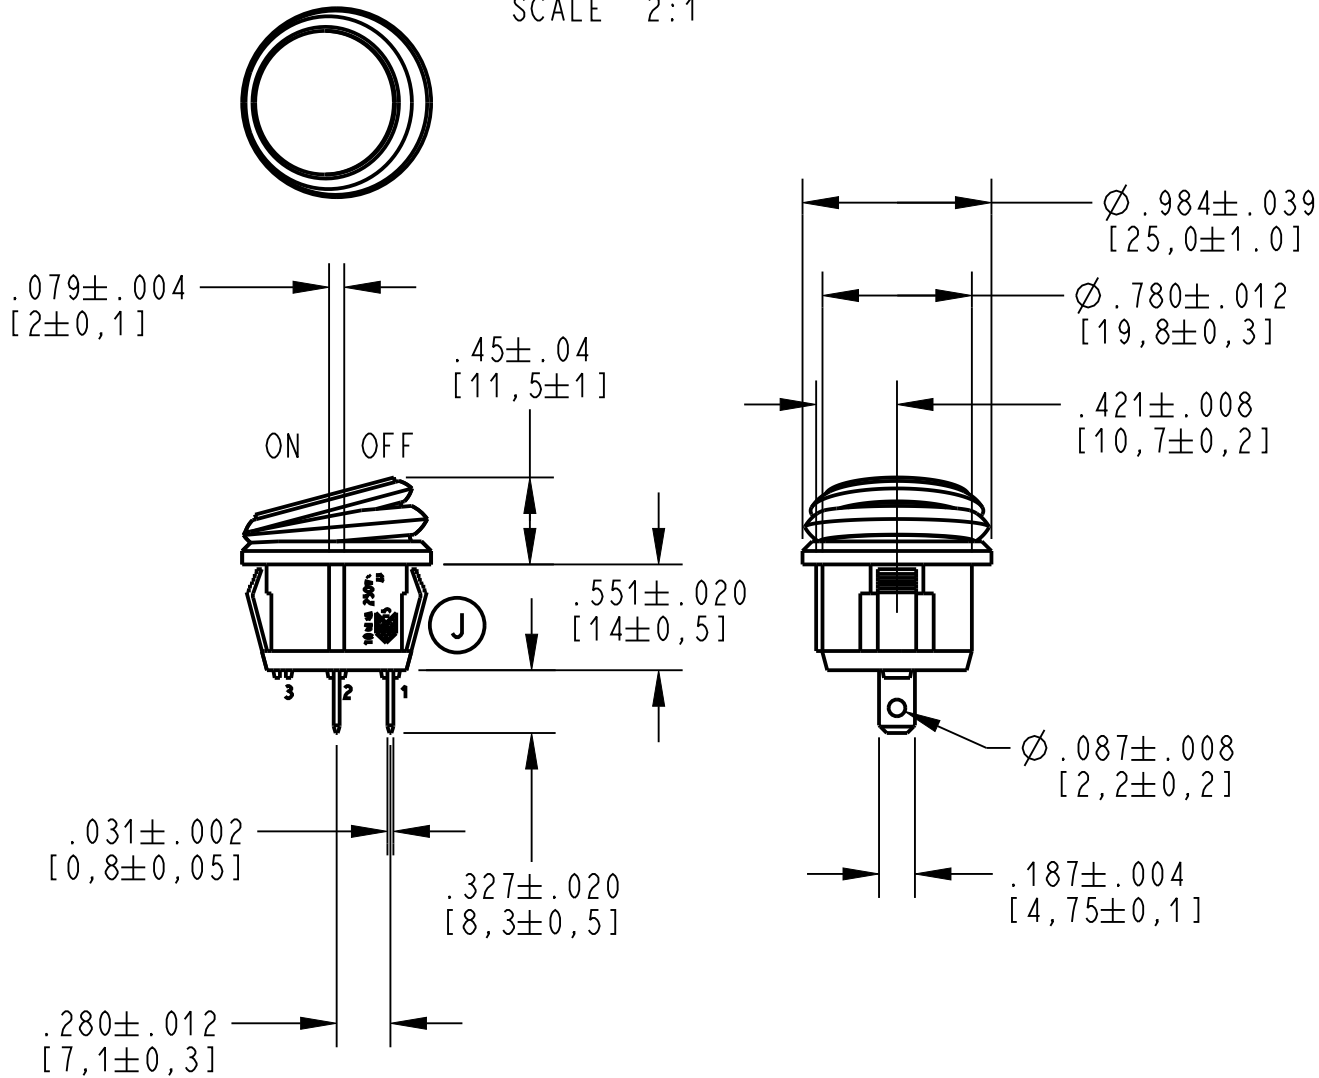

MOUNTING HOLES	
FIG.	PANEL THICKNESS
1	.059 TO .098 [1.5 TO 2,5]
2	.028 TO .098 [0.7 TO 2,5]

J	Z000766945	2025-01-16	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: C. RAMOS
APVD: J. RUMMELHART
DATE: 2025-01-16
THIRD ANGLE PROJECTION
PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES (mm)	± 0.02	± 0.012	± 5 °

ZF Electronic Systems	
PLEASANT PRAIRIE, WISCONSIN U.S.A.	
NAME / DESCRIPTION	
KC-SPST ON-OFF	
B	ITEM NO. KCA2ANA1BBB
SCALE:	1:1 SH 1 OF 1