


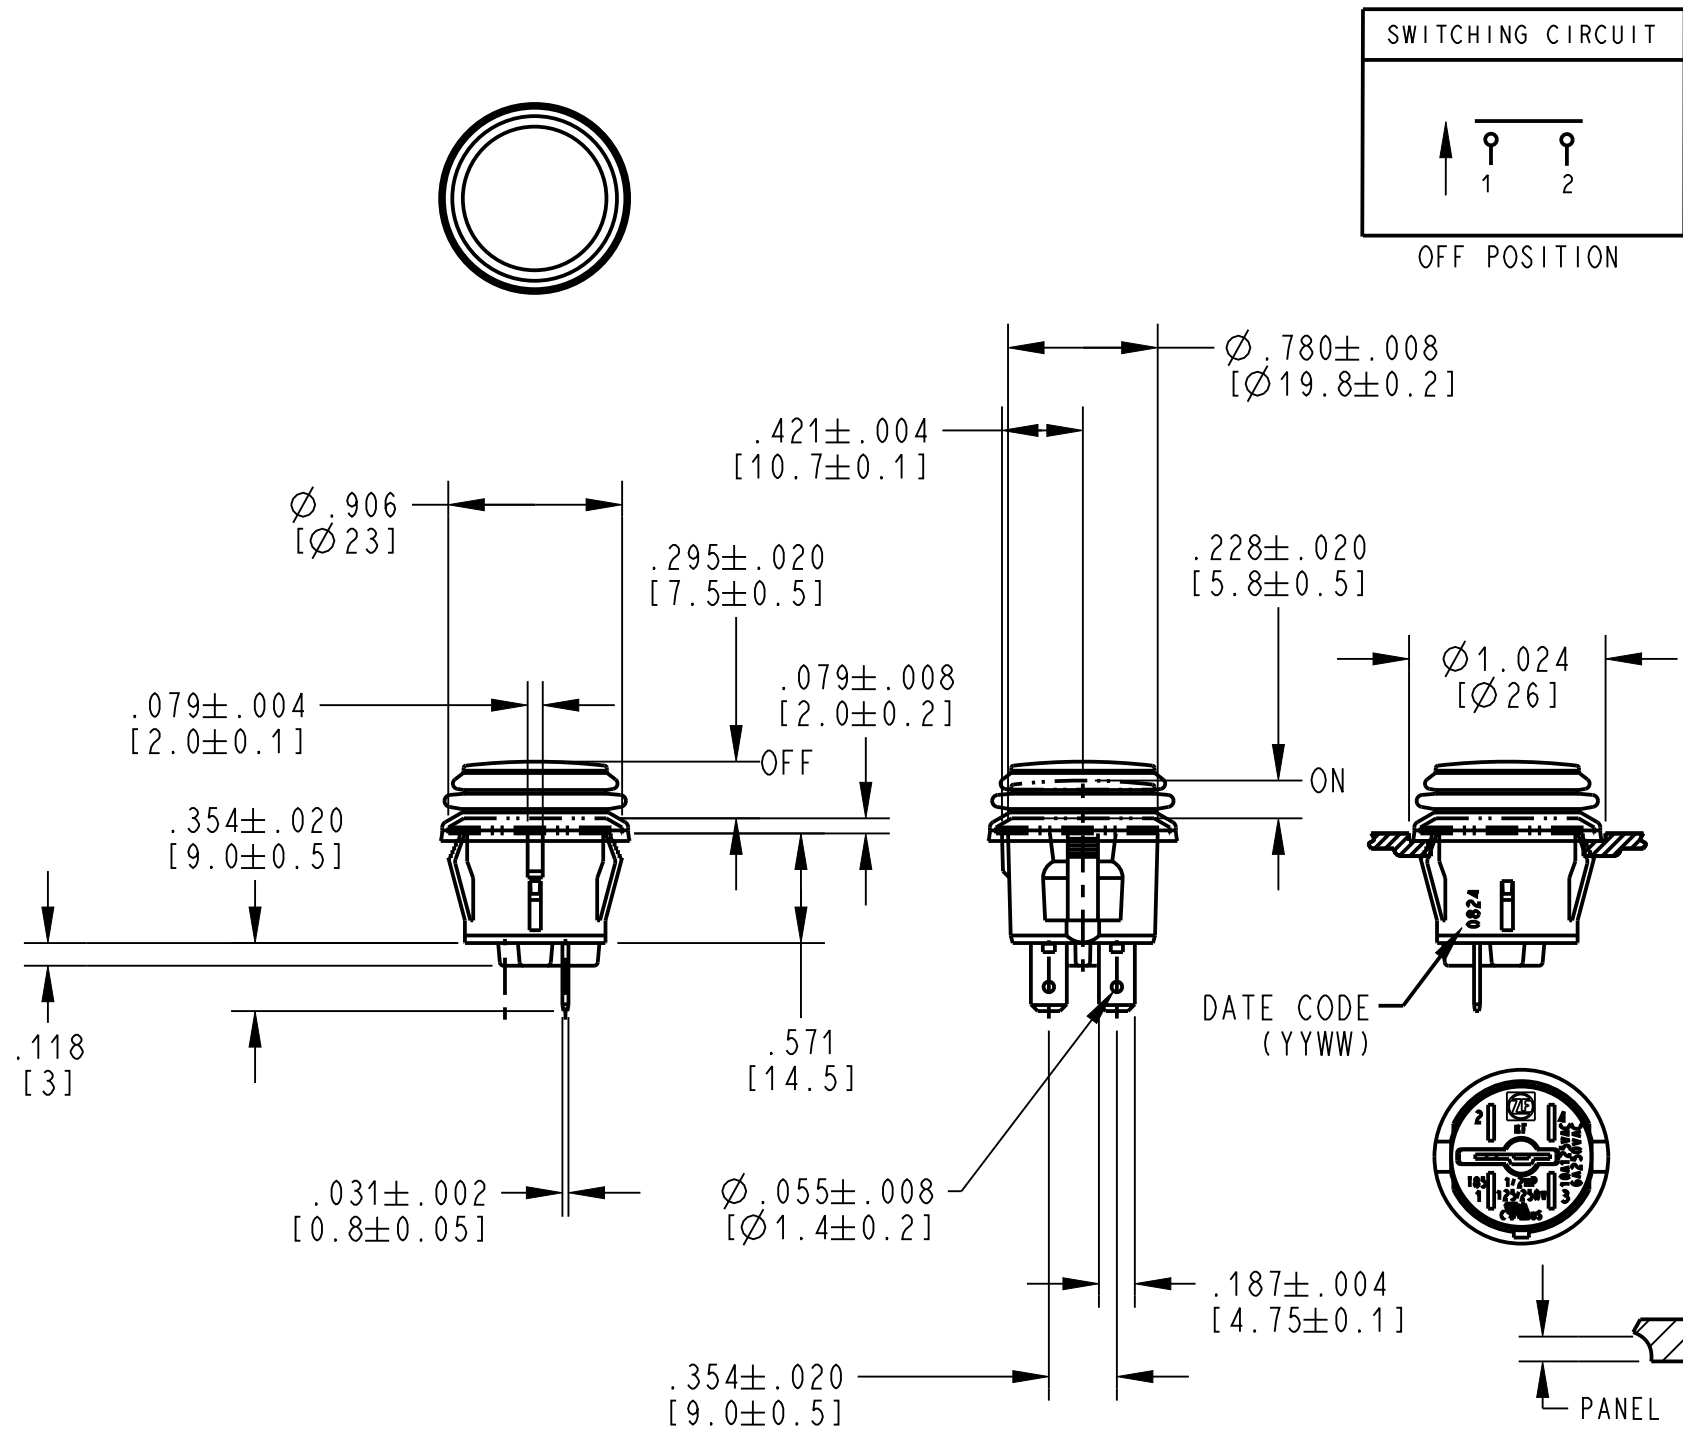

NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: 10A, 125 VAC; 6A, 250 VAC us
1/2 HP, 125/250 VAC us

20A, 14VDC, 10A 28VDC
(NOT AGENCY APPROVED FOR DC)

U.L. ENDURANCE RATING 6000 CYCLES.

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)


INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)


DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.

WATERPROOF: IP65 CAPABLE

OPERATION TEMPERATURE: -25°C TO +85°C

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

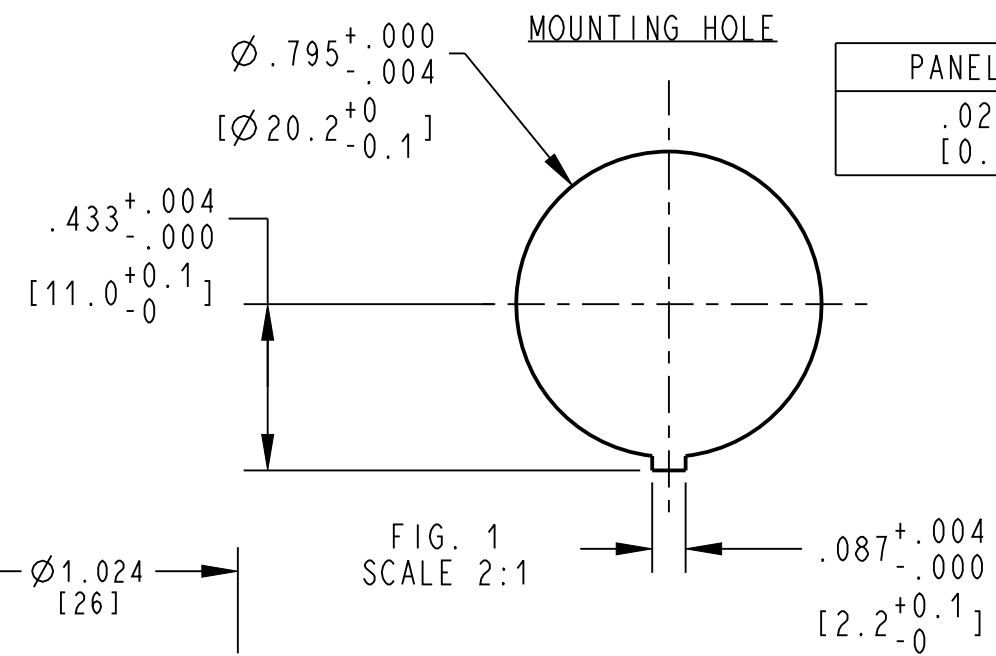

DWN: C RAMOS		 ZF Electronic Systems						
APVD: J RUMMELHART								
DATE: 17-Jun-08								
THIRD ANGLE PROJECTION		PLEASANT PRAIRIE, WISCONSIN U.S.A.						
		NAME / DESCRIPTION						
		KF-SPST (ON)-OFF NON LIGHTED						
		TOLERANCE UNLESS SPECIFIED						
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES	B	ITEM NO. KFB2DNA1BBB	
4000000138		INCH (mm)	± 0.02	± 0.012	± 5.0 °	SCALE: 1:1		SH 1 OF 1

F	Z000374405	16-Aug-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD