


RED LENS

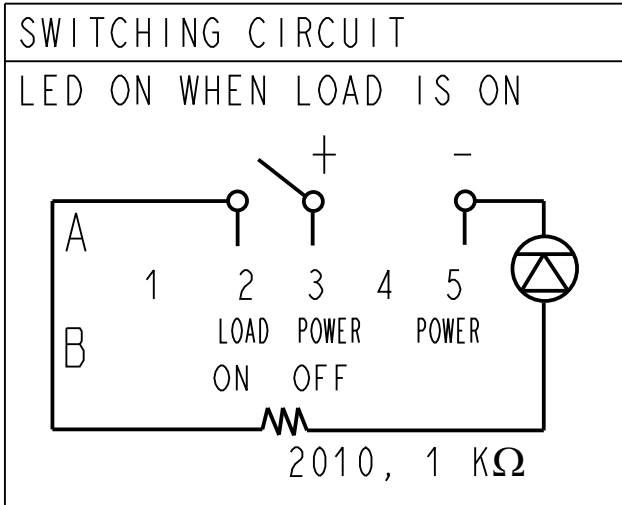

NOTES:  
RATING TO BE MARKED ON HOUSING: 21A 14 VDC  
NO AGENCY RATINGS APPLY

INITIAL CONTACT RESISTANCE: 50 mΩ (MAX)

(F) INSULATION RESISTANCE: 500VDC 100 MΩ (MIN)



DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF AND DUSTPROOF TO FIT: IP56

DATE CODE FORMAT: YYWW

LIGHTED: 14 V L.E.D (DEPENDENT)

OPERATION TEMPERATURE: -20°C TO +85°C

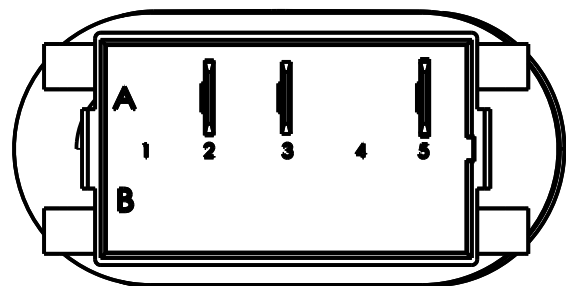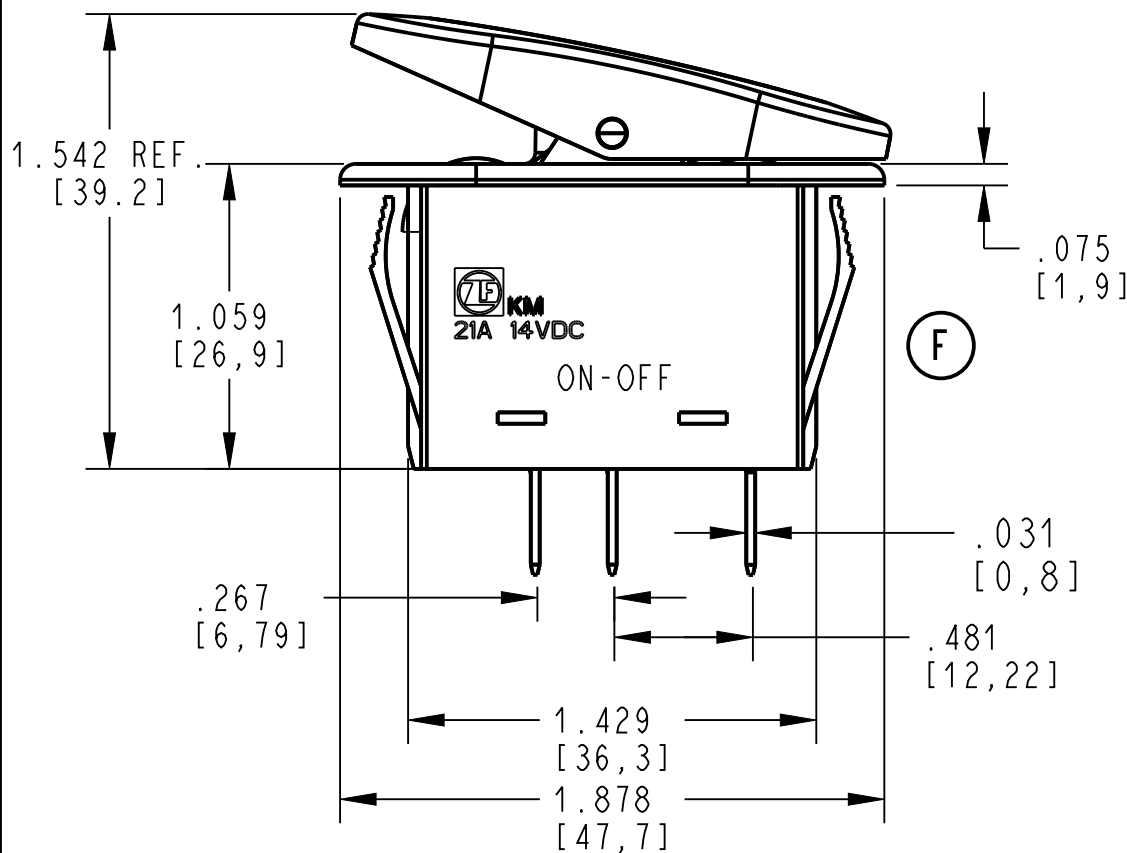


| DIM. Z                        | DIM. X                                                                     | DIM. Y                                                                    |
|-------------------------------|----------------------------------------------------------------------------|---------------------------------------------------------------------------|
| .030 TO .049<br>(0.75 - 1.25) | 1.441 <sup>+.004</sup> <sub>-0</sub> (36.6 <sup>+0.1</sup> <sub>-0</sub> ) | .835 <sup>+.004</sup> <sub>-0</sub> (21.2 <sup>+0.1</sup> <sub>-0</sub> ) |
| .049 TO .079<br>(1.25 - 2)    | 1.449 <sup>+.004</sup> <sub>-0</sub> (36.8 <sup>+0.1</sup> <sub>-0</sub> ) | .835 <sup>+.004</sup> <sub>-0</sub> (21.2 <sup>+0.1</sup> <sub>-0</sub> ) |
| .079 TO .118<br>(2 - 3)       | 1.457 <sup>+.004</sup> <sub>-0</sub> (37.0 <sup>+0.1</sup> <sub>-0</sub> ) | .835 <sup>+.004</sup> <sub>-0</sub> (21.2 <sup>+0.1</sup> <sub>-0</sub> ) |

DWN: J DOLNIK

APVD: JR

DATE: 2025-04-11

THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KM-SPST ON-OFF LIGHTED

B ITEM NO. KMD2AMB7BBBNR1

SCALE: 1:1 SH 1 OF 1

|     |            |           |      |      |
|-----|------------|-----------|------|------|
| F   | Z000374407 | 22-Aug-16 | GP   | EL   |
| REV | ECO NO.    | DATE      | PREP | APVD |

PROJECT/ CSR  
4000000138

TOLERANCE UNLESS SPECIFIED

| DWG UNITS | X.XX   | X.XXX   | ANGLES  |
|-----------|--------|---------|---------|
| INCH [mm] | ± 0.02 | ± 0.012 | ± 5.0 ° |