
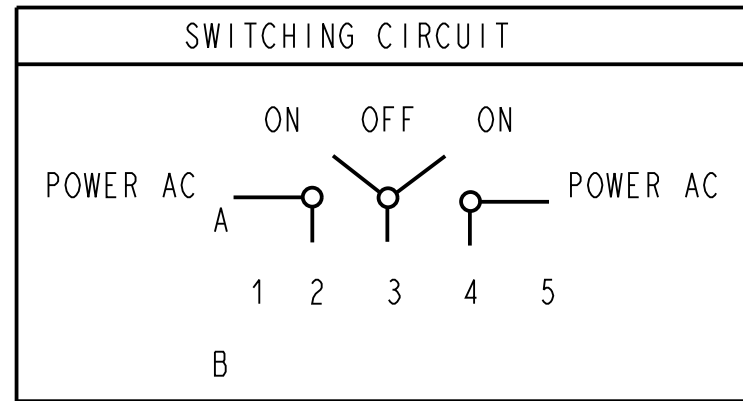


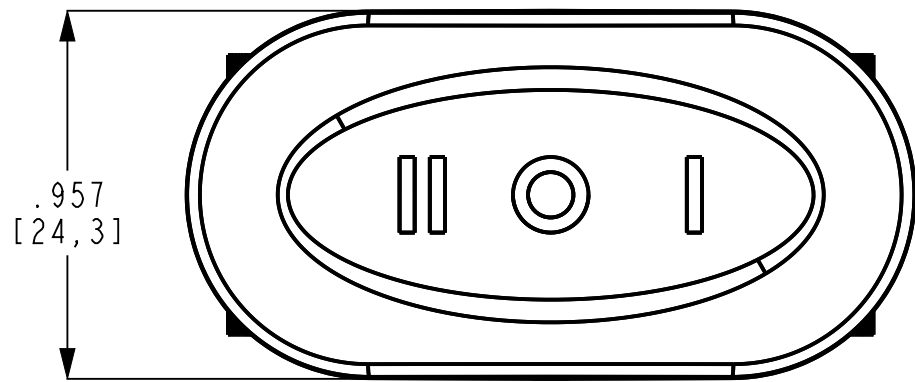

NOTES:

RATING TO BE MARKED ON HOUSING:
21A 14 VDC
NO AGENCY APPROVALS

20A 125VAC (NOT MARKED ON HOUSING)
3/4 HP 125VAC

INITIAL CONTACT RESISTANCE: 50 mΩ (MAX)


(H) INSULATION RESISTANCE: 500VDC 100 MΩ (MIN)

DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56




DATE CODE FORMAT: YYWW

TEMPERATURE RATING: -20°C TO +85°C

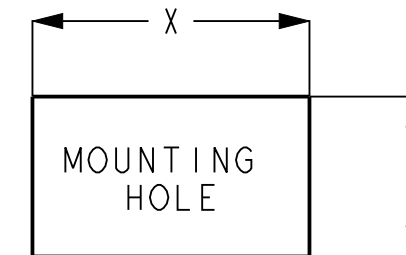

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 (0.75 - 1.25)	1.441 ^{+.004} ₋₀ (36.6 ^{+0.1} ₋₀)	.835 ^{+.004} ₋₀ (21.2 ^{+0.1} ₋₀)
.049 TO .079 (1.25 - 2)	1.449 ^{+.004} ₋₀ (36.8 ^{+0.1} ₋₀)	.835 ^{+.004} ₋₀ (21.2 ^{+0.1} ₋₀)
.079 TO .118 (2 - 3)	1.457 ^{+.004} ₋₀ (37.0 ^{+0.1} ₋₀)	.835 ^{+.004} ₋₀ (21.2 ^{+0.1} ₋₀)

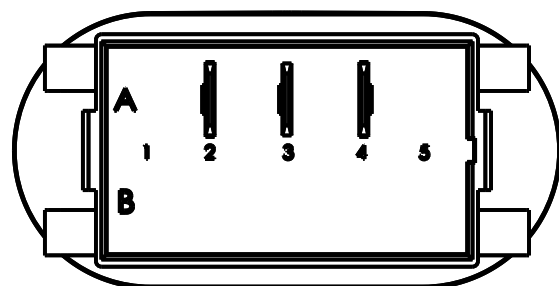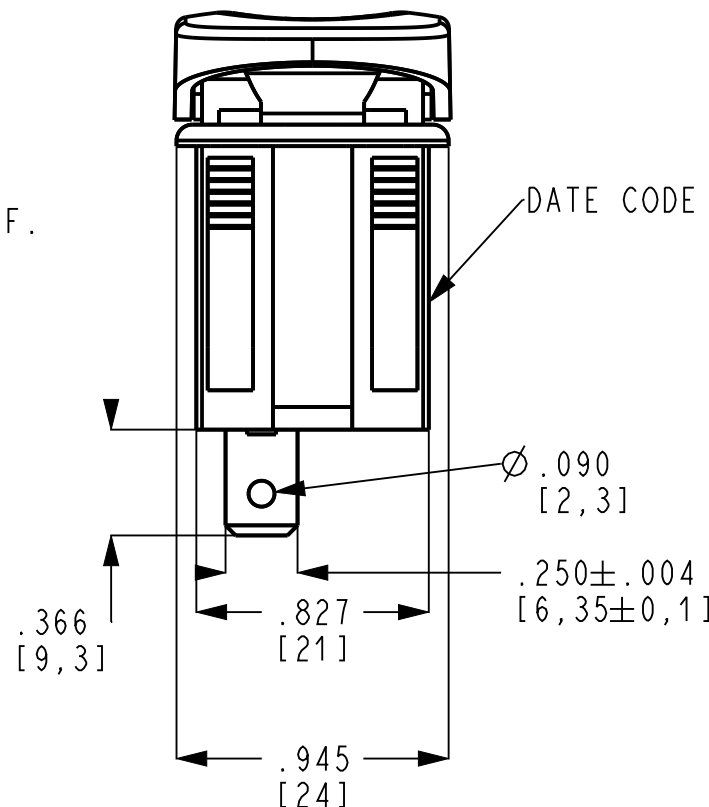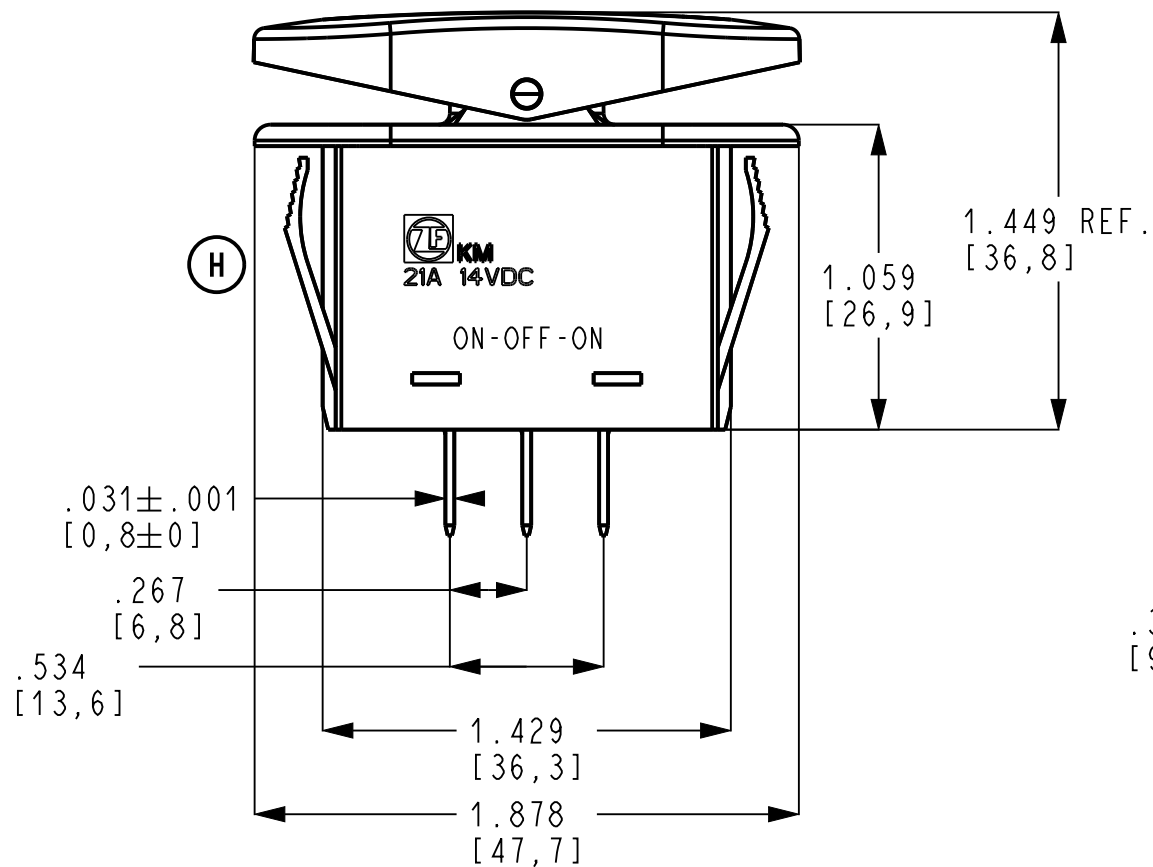

DWN: J.DOLNIK
APVD: JR
DATE: 20-MAY-08
THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

H	Z000374407	22-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5 °

 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION		KM SPDT ON-OFF NON-LIGHTED	
		B	ITEM NO. KMD2CNB1BBNNNN
SCALE: 1:1		SH 1	OF 1