



8 7 6 5 4 3 2 1



F
E
D
C
B
A



SHOWN IN THE
OFF POSITION


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING: TO BE MARKED ON HOUSING
10A, 125 VAC; 6A, 250 VAC 
1/2 HP, 125/250 VAC 
U.L. ENDURANCE RATING 6000 CYCLES.
2. INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
3. INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)
4. DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.
5. WATERPROOF: IP65 CAPABLE
6. OPERATION TEMPERATURE: -25°C TO +85°C
7. ACTUATOR: RED CLEAR PC (94-V2)
8. LIGHTED: DEPENDENT; NEON BULB RATED AT 100-125 V.
9. HOUSING: BLACK NYLON 66 (94-V2).
10. WATERPROOF RUBBER: BLACK SILICONE.
11. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
12. TERMINALS: SILVER-PLATED, COPPER ALLOY #4 TERMINAL (FOR LAMP) IS CLEAN BRASS.

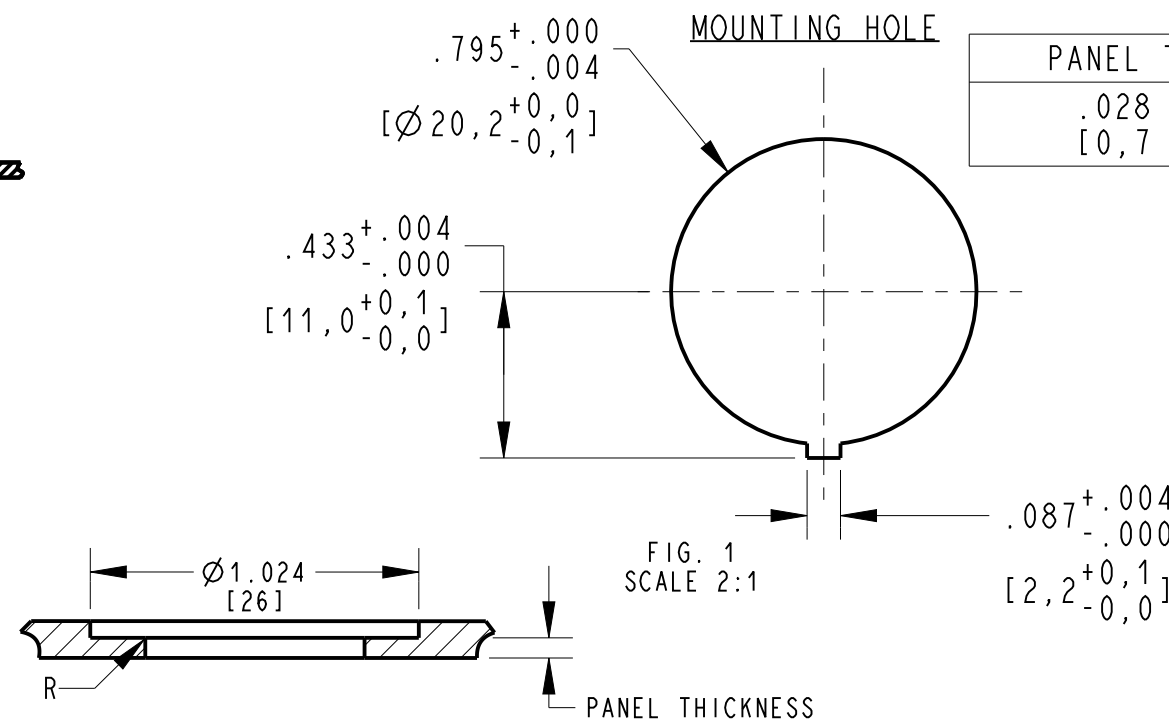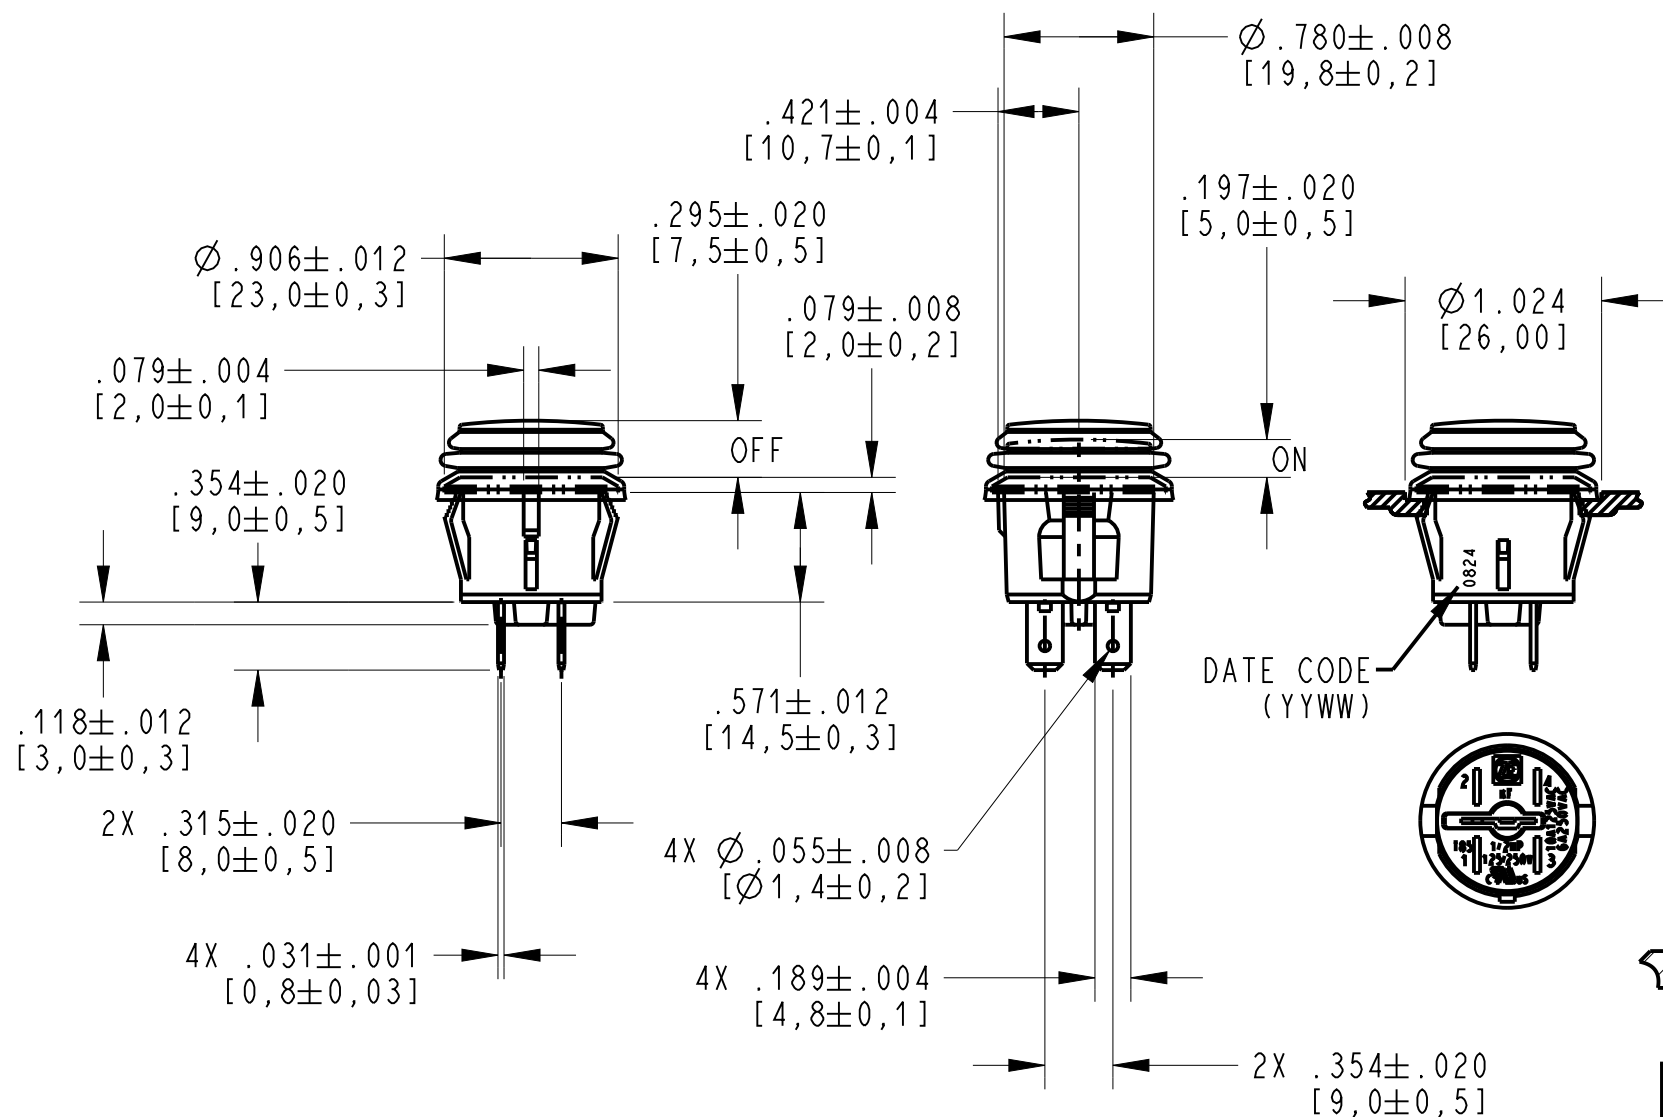

DWN: C. RAMOS
APVD: J. RUMMELHART
DATE: 17-Jun-08

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	$\pm 5.0^\circ$



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KF-DPST ON-OFF LIGHTED

B ITEM NO. KFB3ALA2RBB

SCALE: 1.000 SH 1 OF 1

H	Z000433668	01-Dec-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

8 7 6 5 4 3 2 1

ORIGINAL ON PRO/E