
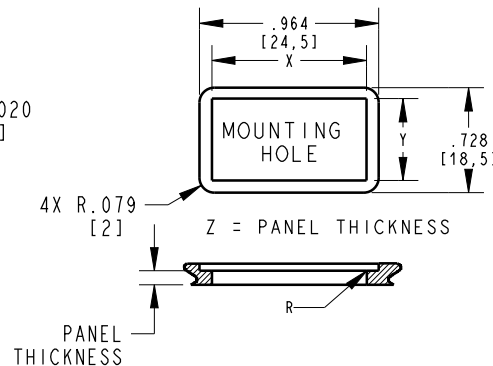


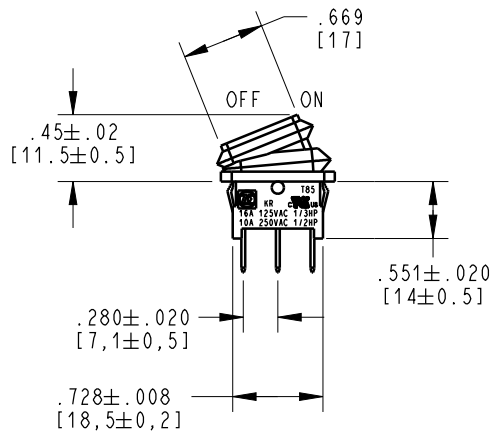
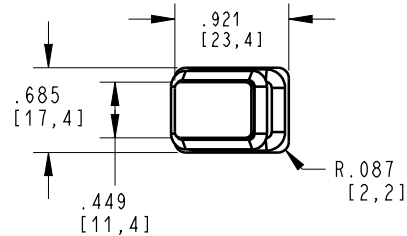


NOTES (UNLESS OTHERWISE SPECIFIED):

- RATING TO BE MARKED ON HOUSING
16A 125VAC, 1/3 HP 
10A 250VAC, 1/2 HP 
U.L. ENDURANCE RATING: 6000 CYCLES.
- INITIAL CONTACT RESISTANCE: 50m Ω MAXIMUM
- INSULATION RESISTANCE: 500VDC 100M Ω MINIMUM
- DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
- TEMPERATURE: -25°C TO 85°C
- WATERPROOF: IP65 CAPABLE
- ACTUATOR: RED CLEAR PC (94-V2), NO LEGEND.
HOUSING: BLACK, NYLON 66 (94-V2).
WATERPROOF RUBBER BLACK SILICONE.
- DATE CODE FORMAT: YYWW
- LIGHTED: DEPENDENT; NEON BULB RATED AT ~250V.
- TERMINALS: SILVER-PLATED, COPPER ALLOY. TERMINAL 3 (FOR LAMP) IS BRASS CLEAN. .187 $\pm$.004 [4,8 $\pm$ 0,1] X .031 $\pm$.001 [0,8 $\pm$ 0,03]
QUICK CONNECT. HOLE DIAMETER .087 $\pm$.008 [2,2 $\pm$ 0,2]
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.



THICKNESS	DIM. X	DIM. Y
.030 TO .059 [0,75 TO 1,5]	.764+.000/- .004 [19,4+0,0/-0,1]	.512+.004/- .000 [13+0,1/-0,0]
.059 TO .098 [1,5 TO 2,5]	.780+.000/- .004 [19,8+0,0/-0,1]	.512+.004/- .000 [13+0,1/-0,0]

DWN: R. YANEZ
APVD: E. LESLIE
DATE: 11-Mar-14
THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KR-SPST ON-OFF LIGHTED

D	Z000438665	10-Jan-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °

B	ITEM NO.	KRE2AEA2RBB
SCALE:	1:1	SH 1 OF 1

ORIGINAL ON PRO/E