
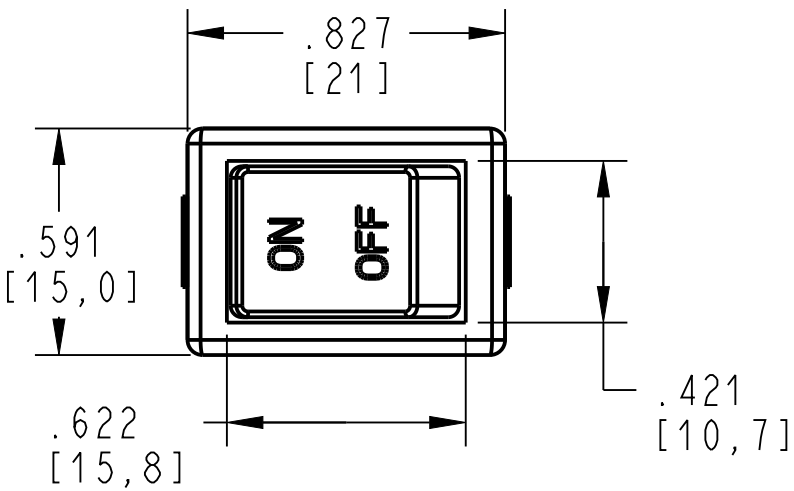


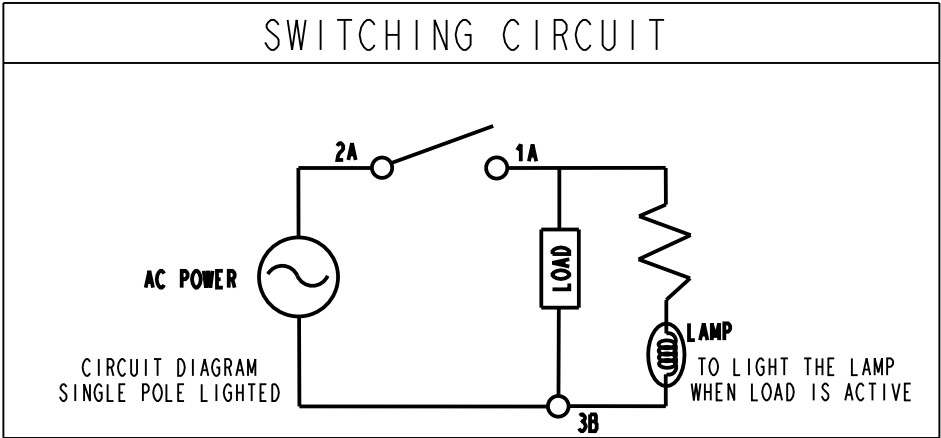

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON HOUSING:

10A 125 VAC
8A 250 VAC
1/4 HP 125/250 VAC

(K) 10(4)A 250V~T125/55

12(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE: 1500 VAC FOR 1 MINUTE





INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC

INITIAL CONTACT RESISTANCE: 20mΩ MAX.

ELECTRICAL LIFE: 10,000 CYCLES

ACTUATOR COLOR: RED

ILLUMINATION: 100-125VAC

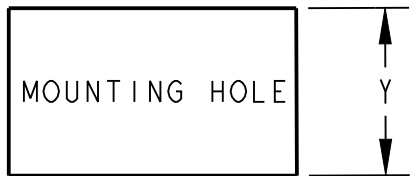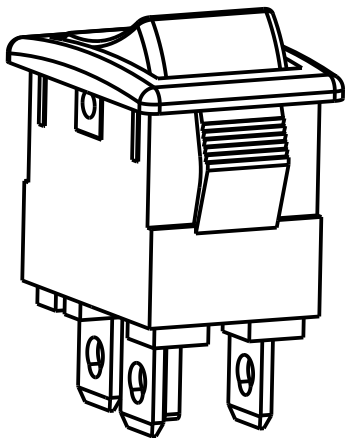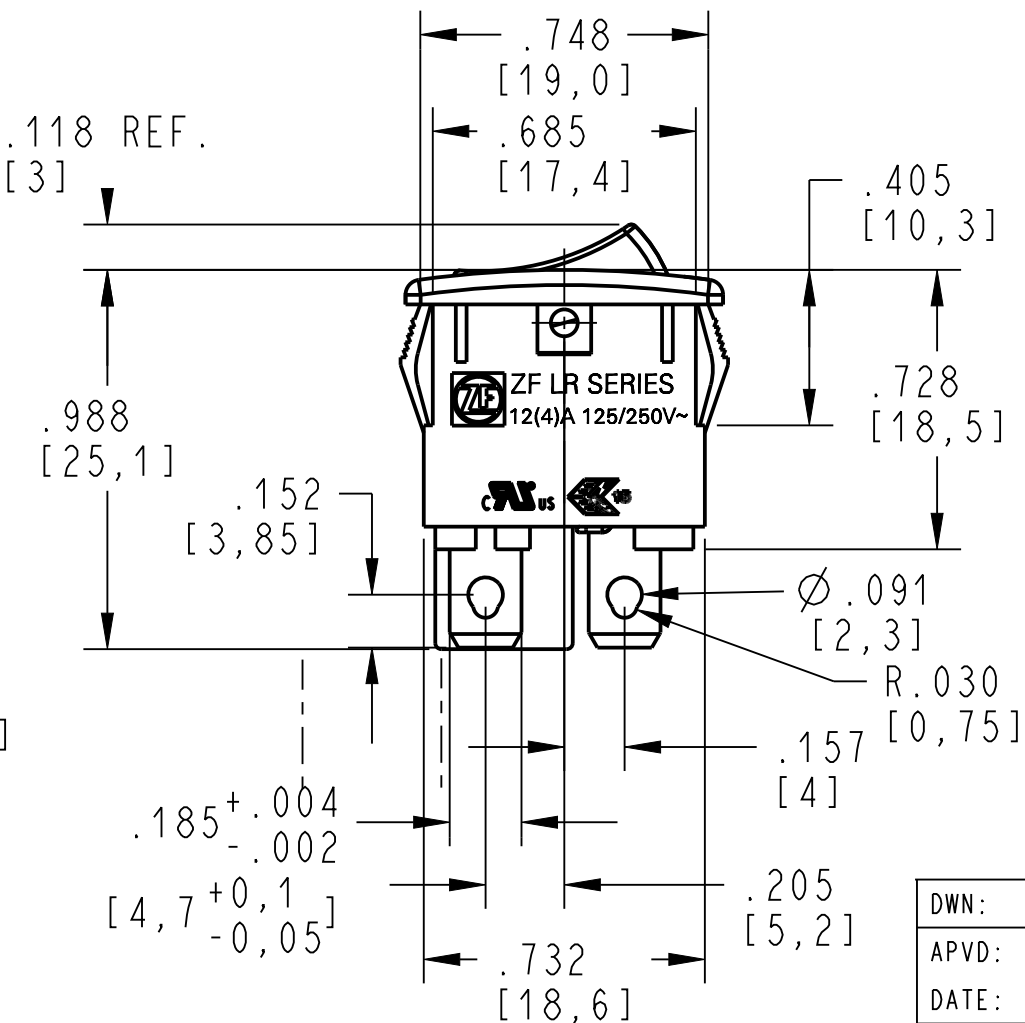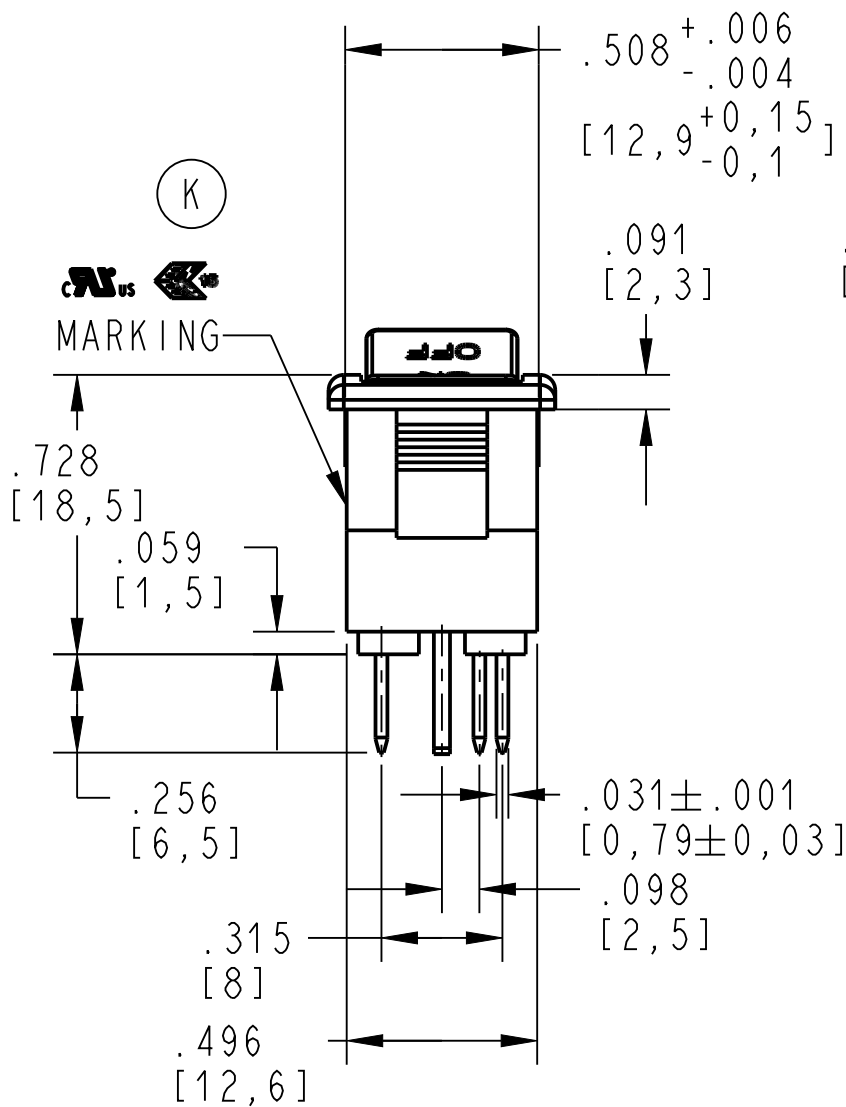


Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0,75 TO 1,25]	.756 $+.004/- .000$ [19,2 $+0,1/-0,0$]	.508 $+.006/- .000$ [12,9 $+0,15/-0,0$]
.049 TO .079 [1,25 TO 2,0]	.764 $+.004/- .000$ [19,4 $+0,1/-0,0$]	.508 $+.006/- .000$ [12,9 $+0,15/-0,0$]
.079 TO .118 [2,0 TO 3,0]	.780 $+.004/- .000$ [19,8 $+0,1/-0,0$]	.508 $+.006/- .000$ [12,9 $+0,15/-0,0$]

DWN: TLM
APVD: ELL
DATE: 25-Oct-07

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. LRA22H2BBRLN

SCALE: 2.000 SH 1 OF 1

K	Z000686755	2023-04-25	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	$\pm 5.0^\circ$