


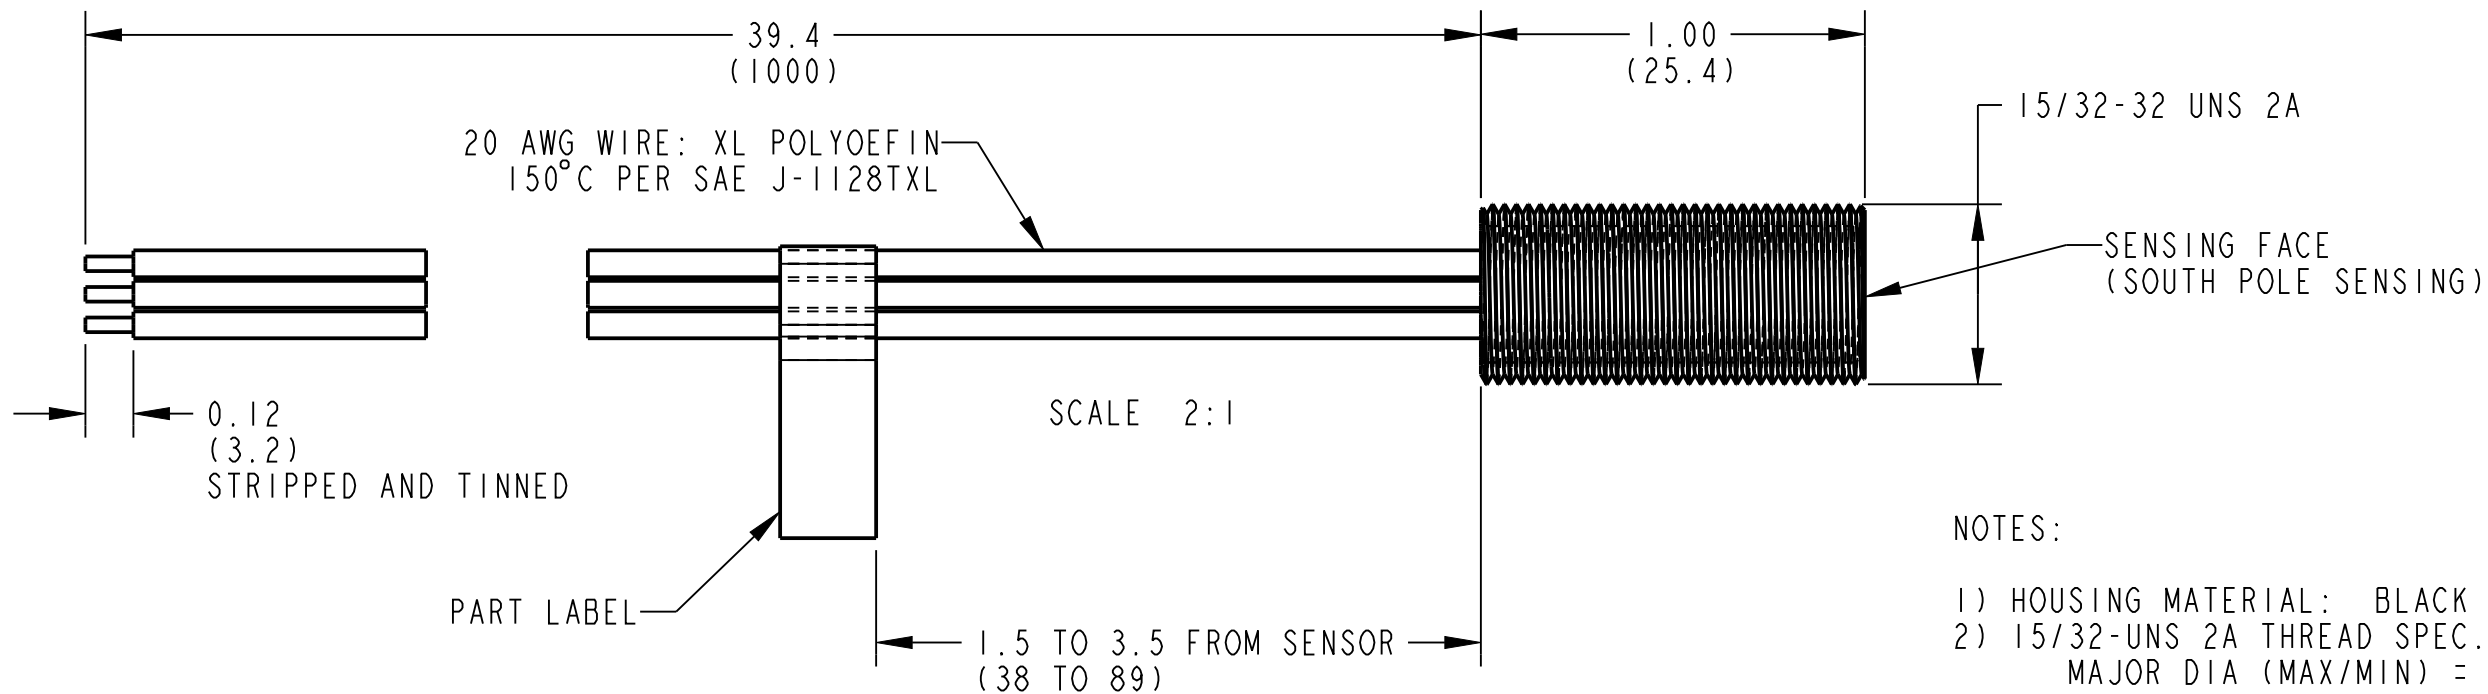


NOTES:

- 1) HOUSING MATERIAL: BLACK ANODIZED ALUMINUM
- 2) 15/32-UNS 2A THREAD SPEC.:
MAJOR DIA (MAX/MIN) = .4678/.4618
PITCH DIA (MAX/MIN) = .4475/.4440
- 3) ALL DIMENSIONS ARE IN INCHES.
METRIC DIMENSIONS IN BRACKETS.
- 4) WIRE TYPE: 20 GAUGE WIRE, XL POLYOLEFIN
150°C, MEETS SAEJ - 1128BTXL.
- 5) ALL SENSORS ARE 100% FUNCTIONAL TESTED.
- 6) REFER TO PRODUCT SPECIFICATION DOCUMENT
PSPEC-00087 FOR ADDITIONAL INFORMATION.
- 7) PRUDUCT IS ROHS COMPLIANT.
- 8) LABEL TO INCLUDE:
ZF MEXICO
ZF PART NUMBER
DATE CODE: YY/WW-A/B SHIFT

OUTPUT		
SUPPLY V _{cc}	GROUND	OUTPUT V _o
BROWN	BLUE	BLACK

DWN: MAS
APVD: DRL
DATE: 11-JUL-01
THIRD ANGLE PROJECTION



PROJECT/ CSR
NA



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

THREADED MAGNETIC SENSOR

B ITEM NO. MP100701

SCALE: 2:1 SH 1 OF 1

A	95318	11-JUL-01	TCH	TB
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.005	± 1°

ORIGINAL ON PROJE