
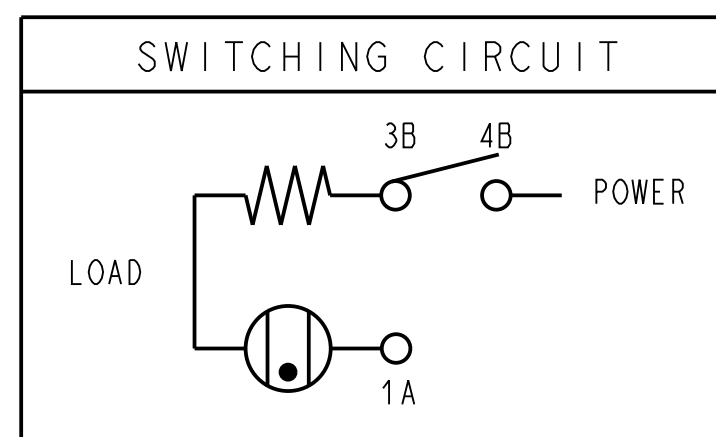


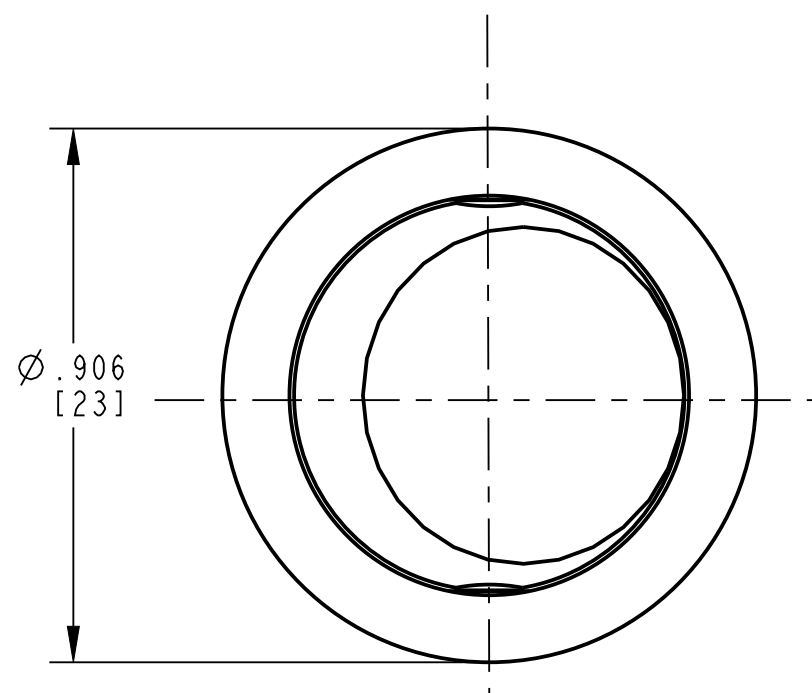

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON ROCKER:

10A 125VAC
8A 250VAC
1/4HP 125/250VAC

(J) CE 10(4)A 250V~T125/55 10E3

cus 12(4)A 125/250V~



2. INITIAL CONTACT RESISTANCE: 20m Ω (MAX.)

3. INSULATION RESISTANCE: 100M Ω MIN. AT 500VDC.

4. DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.


5. TERMINALS (3): .185+.004/- .002 [4,7+0,1/-0,05]
X .031±.001 [0,8±0,03].

6. ILLUMINATED: 100~125VAC.

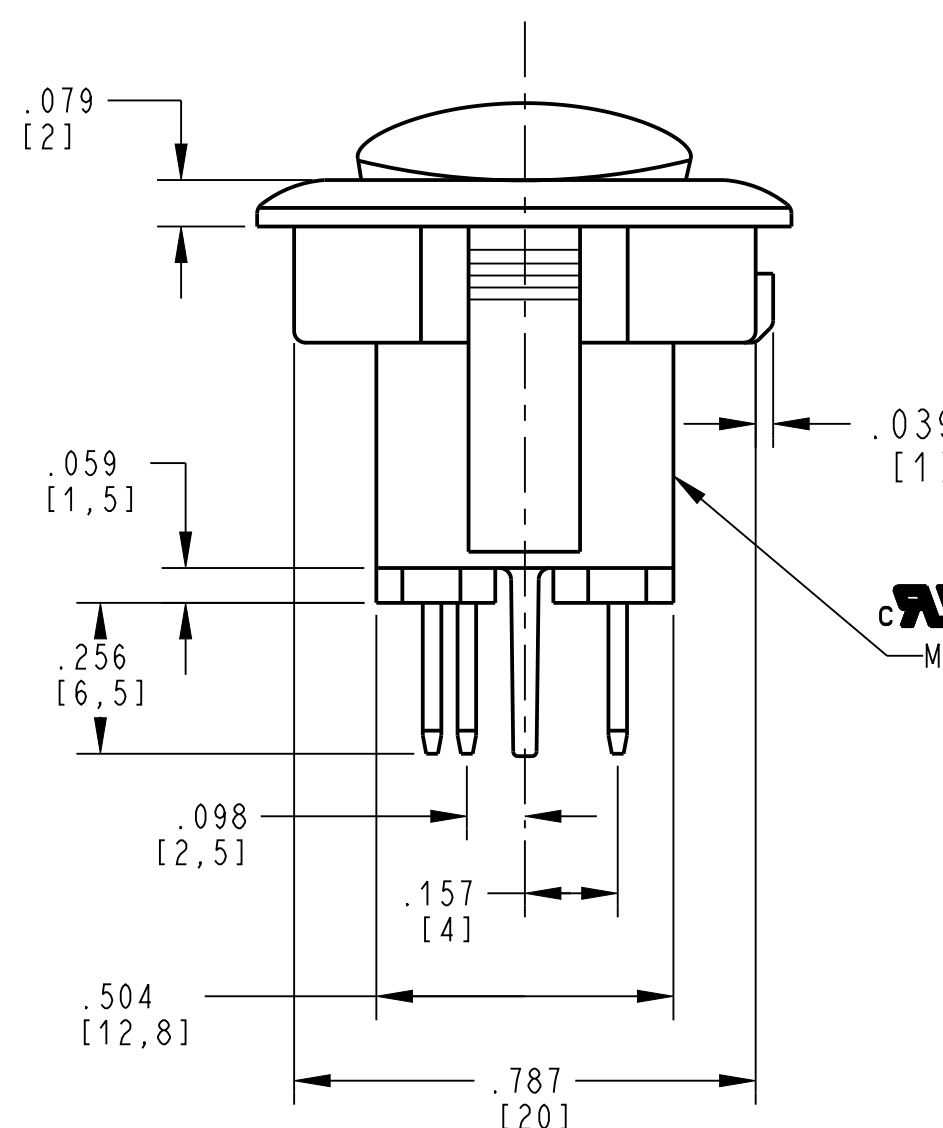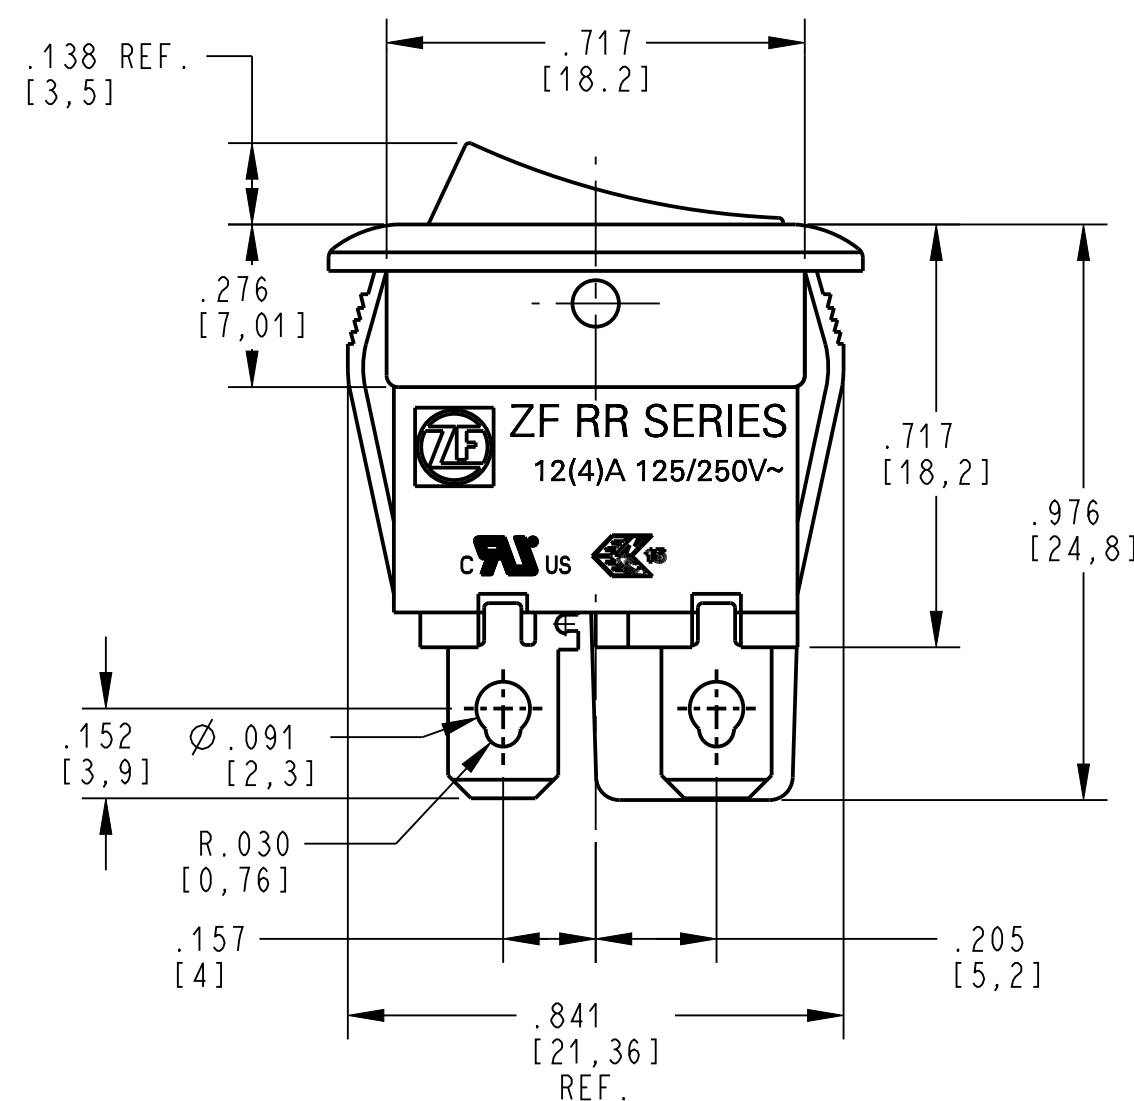


Ø.787^{+.004}_{-.000}
[20^{+0,1}_{-0,0}]

cus MARKING

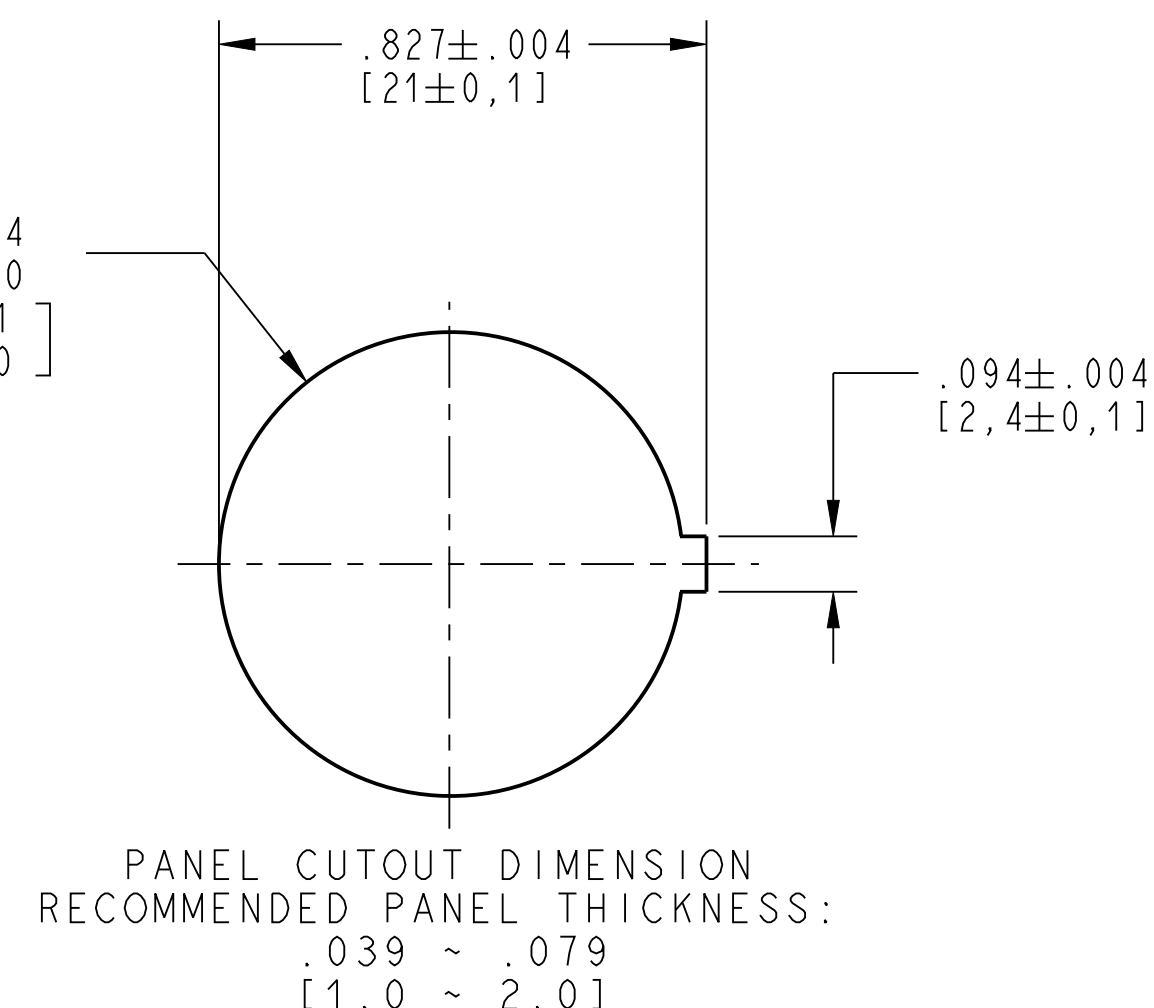

DWN: TLM
APVD: SG
DATE: 03-Jul-03

THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

REV	ECO NO.	DATE	PREP	APVD
J	Z000689143	5-9-2023	TCH	ELL

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
N/A	INCHES	± 0.02	± 0.012	± 5.0 °

TOLERANCE UNLESS SPECIFIED	DWG UNITS	X.XX	X.XXX	ANGLES
	INCHES	± 0.02	± 0.012	± 5.0 °

ITEM NO.	RR A22H3BBGLN
SCALE:	3:1
SH	1
OF	1