
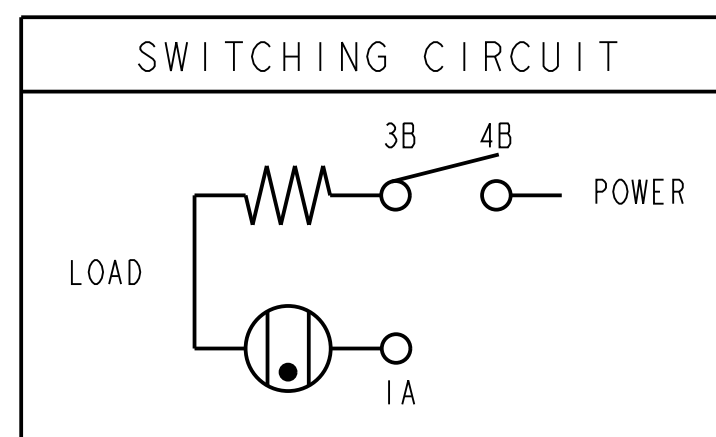


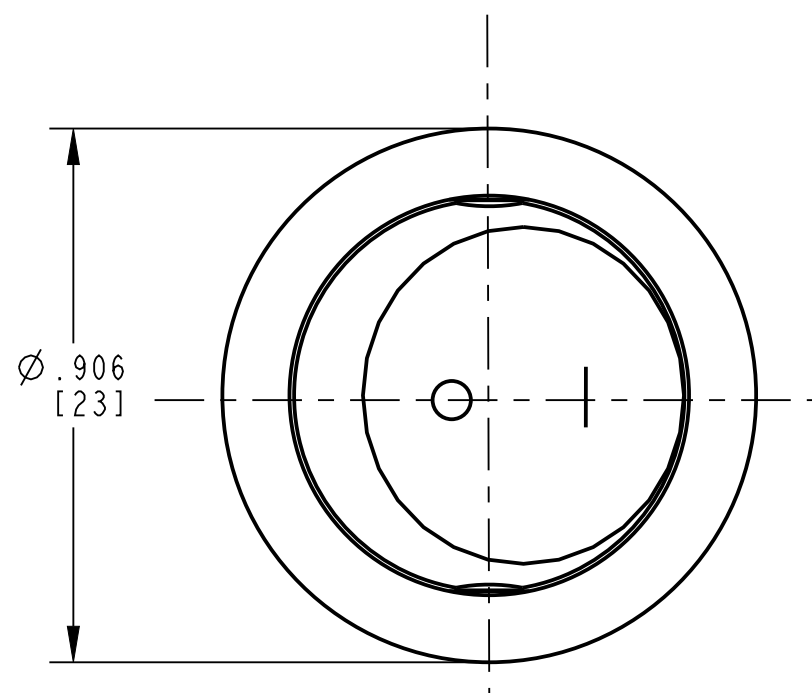

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON ROCKER:

10A 125VAC
8A 250VAC
1/4HP 125/250VAC

CE 10(4)A 250V~T125/55 10E3

cus 12(4)A 125/250V~




2. INITIAL CONTACT RESISTANCE: 20m Ω (MAX.)

3. INSULATION RESISTANCE: 100M Ω MIN. AT 500VDC.

4. DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.


5. TERMINALS (3): .185+.004/- .002 [4,7+0,1/-0,05]
X .031 $\pm$.001 [0,8 $\pm$ 0,03].

6. ILLUMINATED: 100~125VAC.

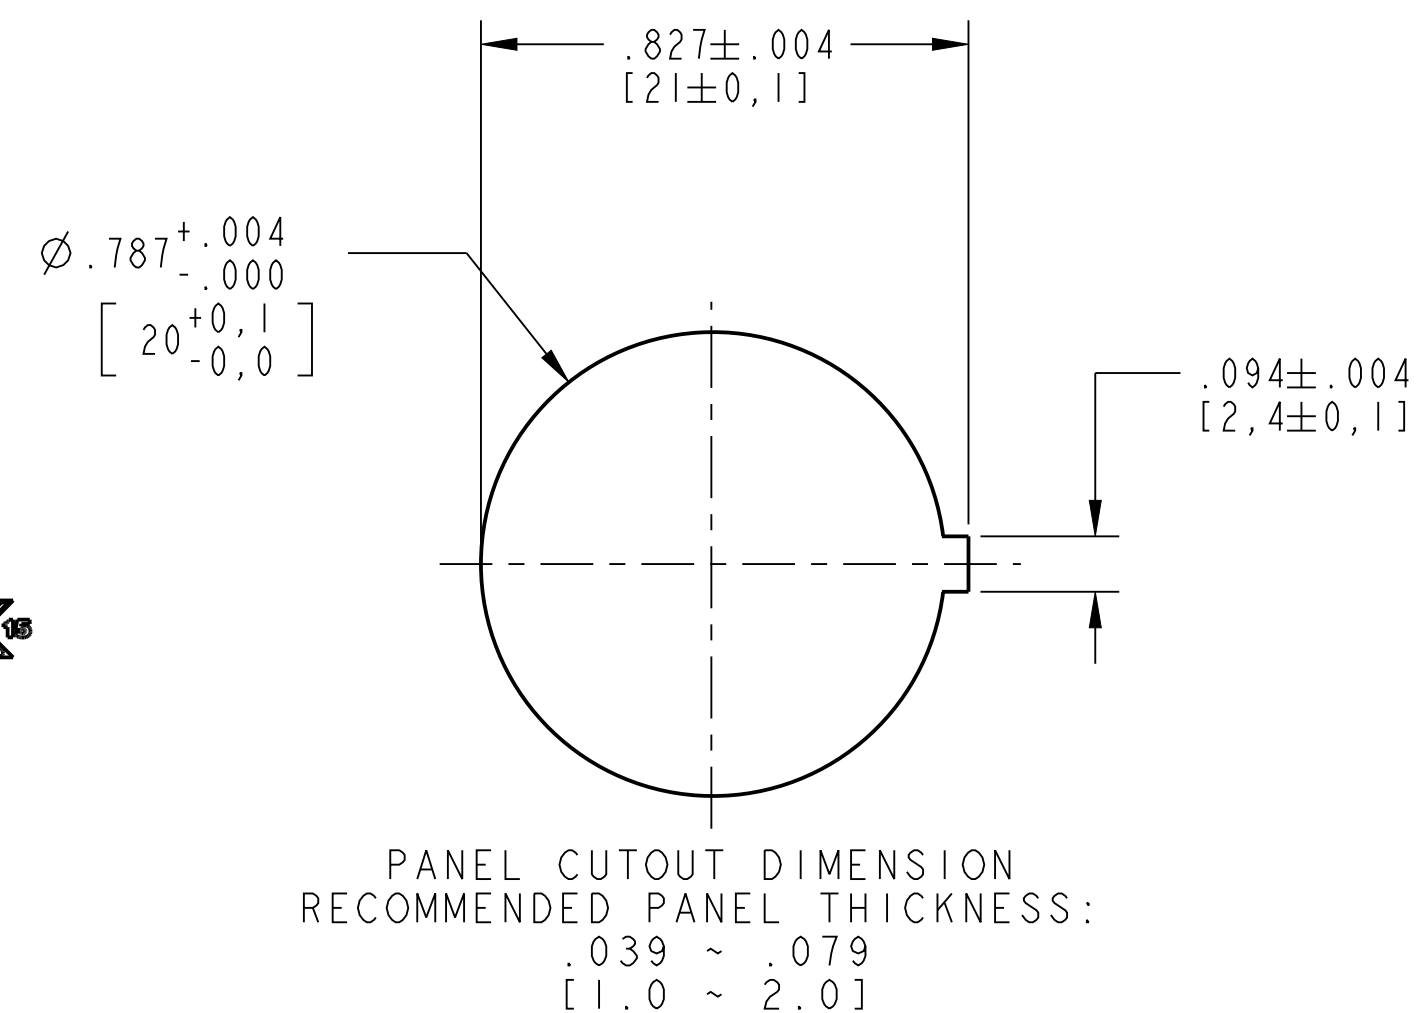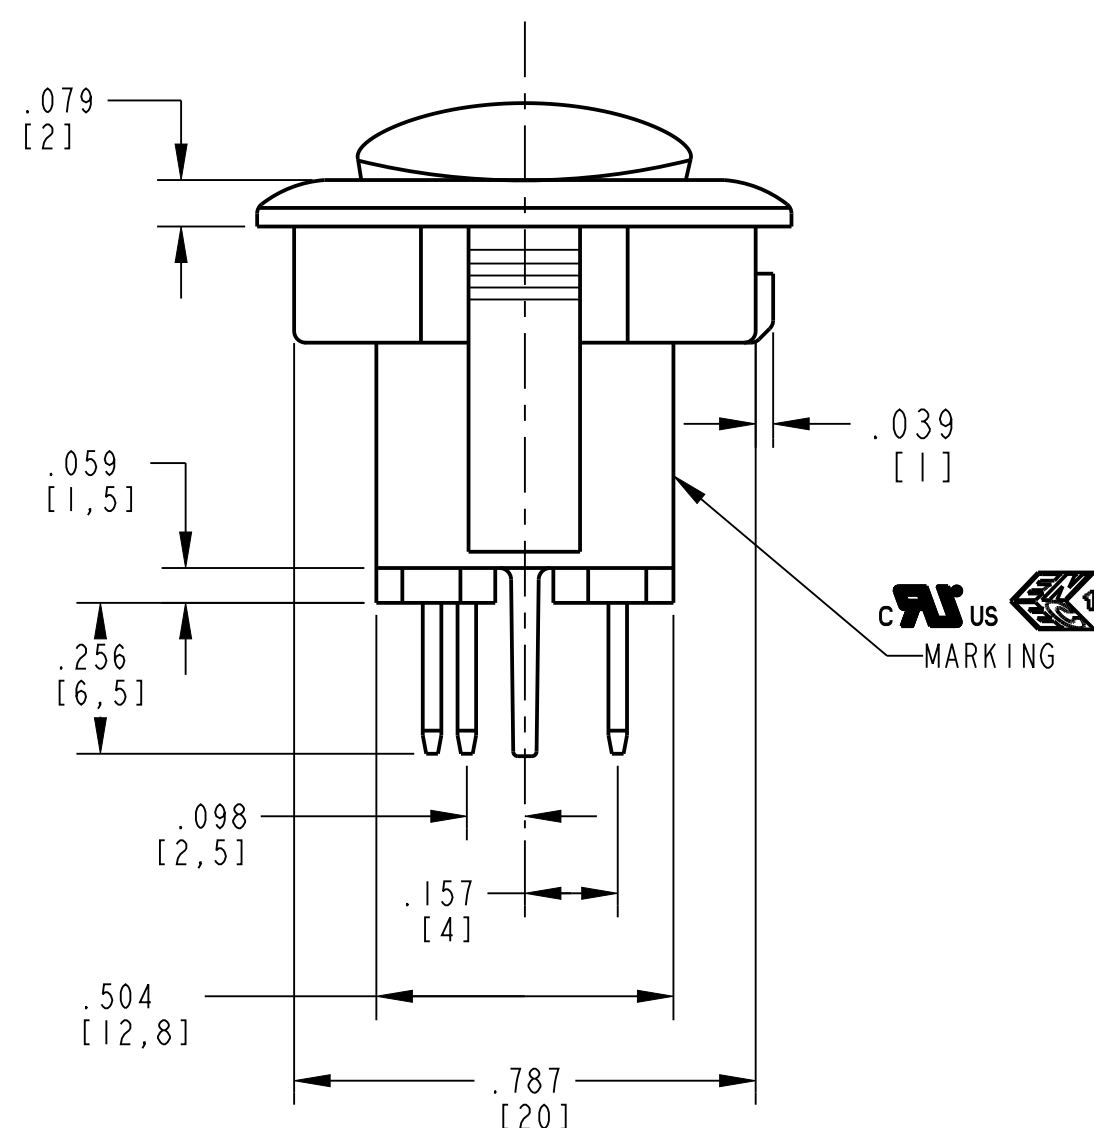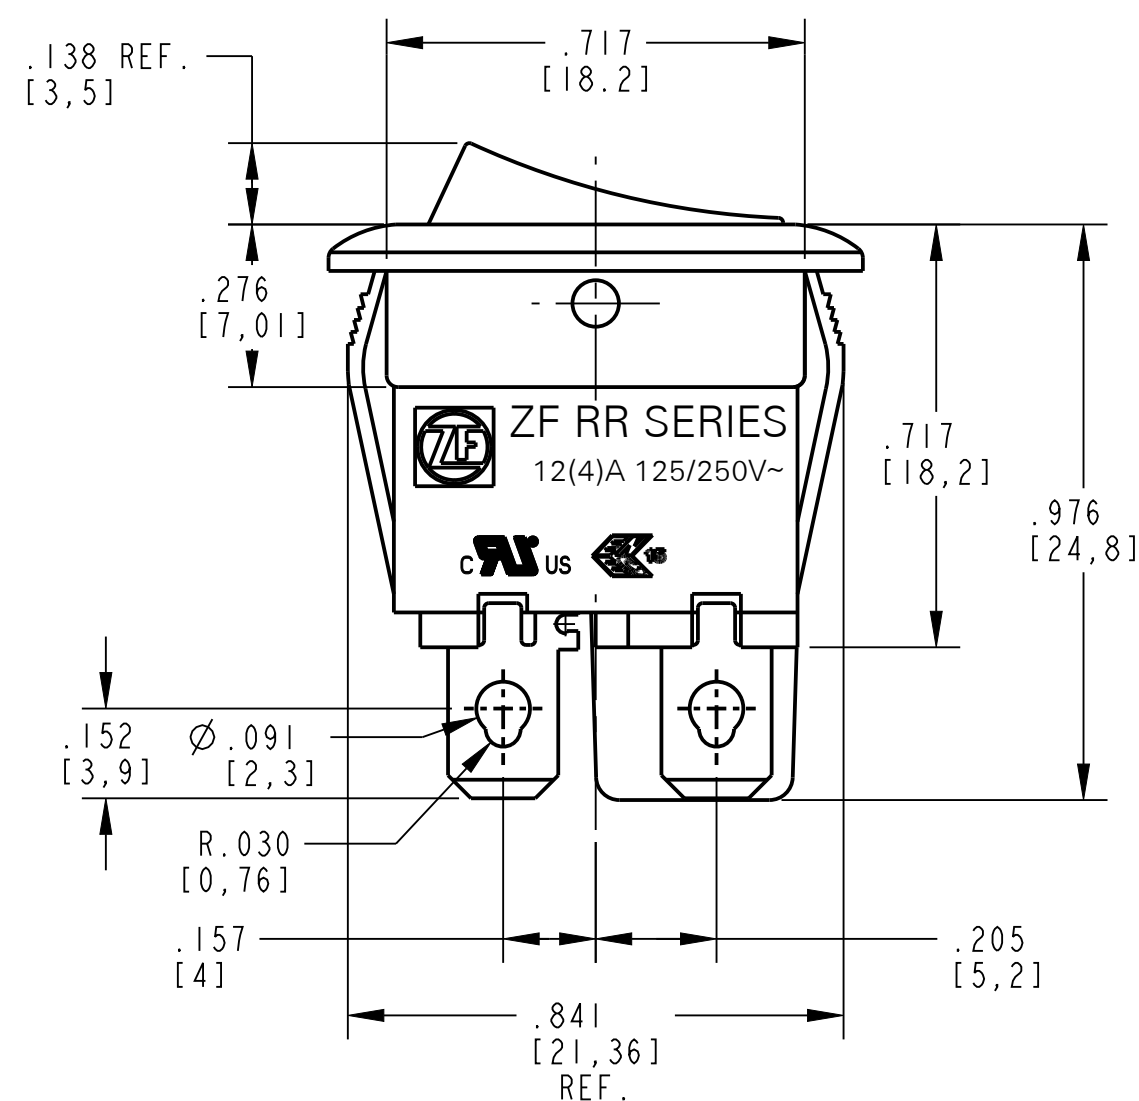

DWN: TLM
APVD: SG
DATE: 03-Jul-03

THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

A	Z00000000	05-08-2023	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
N/A	INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °

C	ITEM NO.	RR A22H3EBBNN
SCALE:	3:1	SH 1 OF 1

ORIGINAL ON PRO/E