
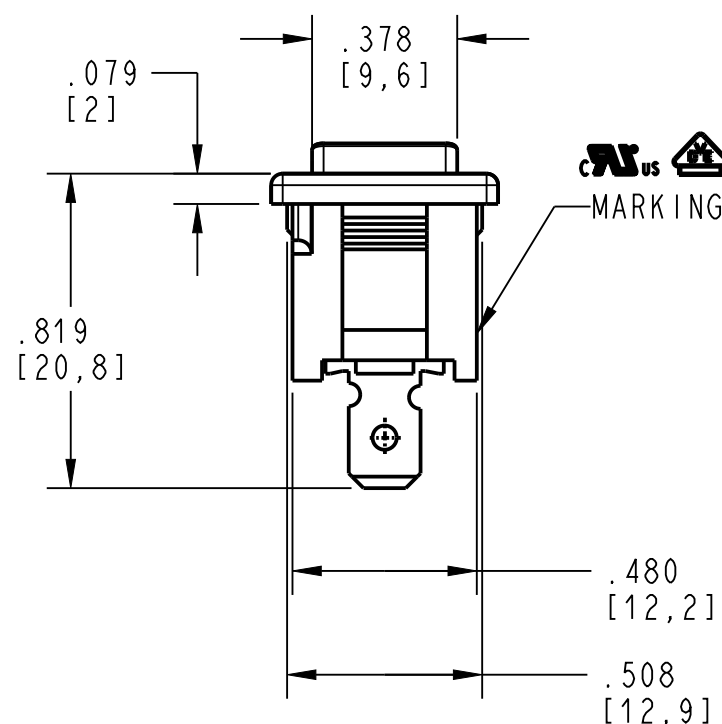
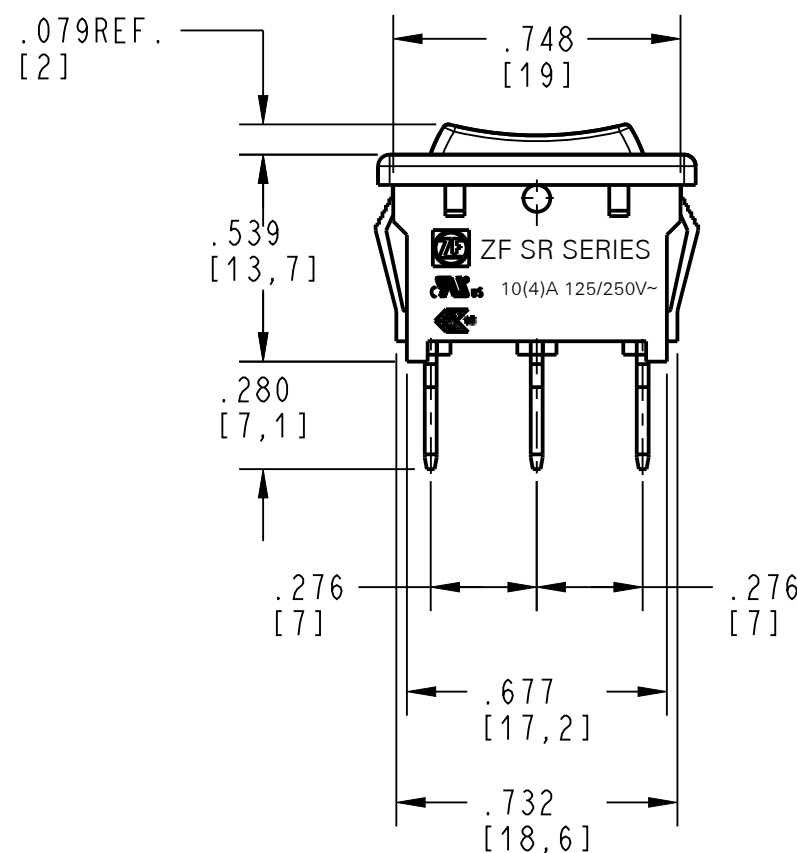
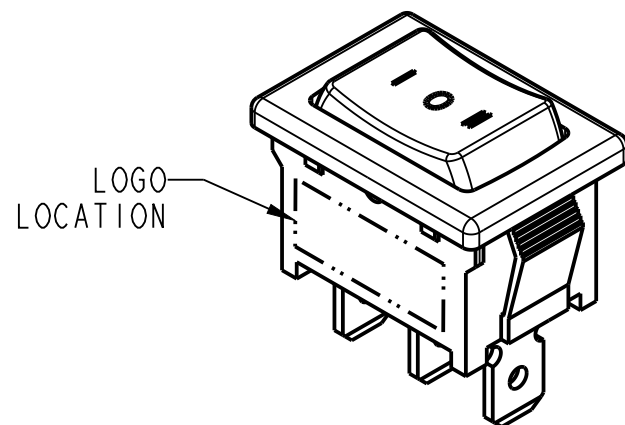


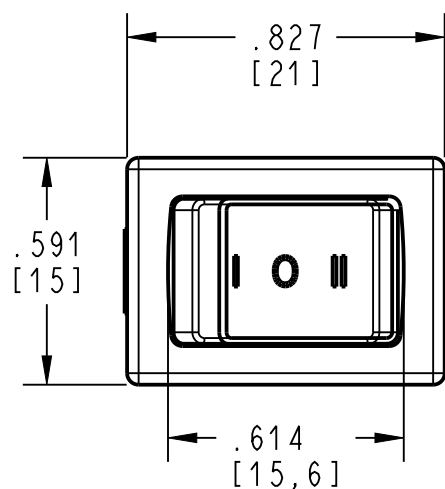

NOTES (UNLESS OTHERWISE SPECIFIED):

1. RATING TO BE MARKED ON HOUSING:

 10A 125 VAC
6A 250 VAC

 10(4)A 250 V~ T125/55

 10(4)A 125/250V~

2. DIELECTRIC STRENGTH: 1,000 VAC FOR 1 MINUTE

3. INSULATION RESISTANCE: 100 MΩ MIN. AT 500 VDC

4. INITIAL CONTACT RESISTANCE: 20 mΩ MAX.


5. ELECTRICAL LIFE: 10,000 CYCLES

6. ACTUATOR COLOR: BLACK


7. TERMINALS: .187 (4.8) WIDE X .31 (0.8) THICK,
HOLE DIAMETER .063 (1.6).

8. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.


Z = PANEL THICKNESS



DIM. Z	DIM. X	DIM. Y
.030 TO .049 [.75 TO 1.25]	.756 ^{+.004} _{-.000} [19.2 ^{+0.1} _{-0.0}]	.508 ^{+.006} _{-.000} [12.9 ^{+0.15} _{-0.0}]
.049 TO .079 [1.25 TO 2.0]	.764 ^{+.004} _{-.000} [19.4 ^{+0.1} _{-0.0}]	
.079 TO .118 [2.0 TO 3.0]	.780 ^{+.004} _{-.000} [19.8 ^{+0.1} _{-0.0}]	

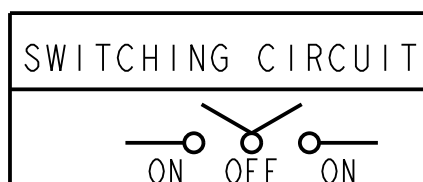

DWN: TLM
APVD: SG
DATE: 28-Apr-06
THIRD ANGLE PROJECTION



H	Z000390631	02-Jan-17	GP	EL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
4000000138

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5 °

**ZF Electronic Systems**
PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME/ DESCRIPTION
SR ROCKER

B	ITEM NO. SRB24A2HBBNN
SCALE: 2:1	SH 1 OF 1