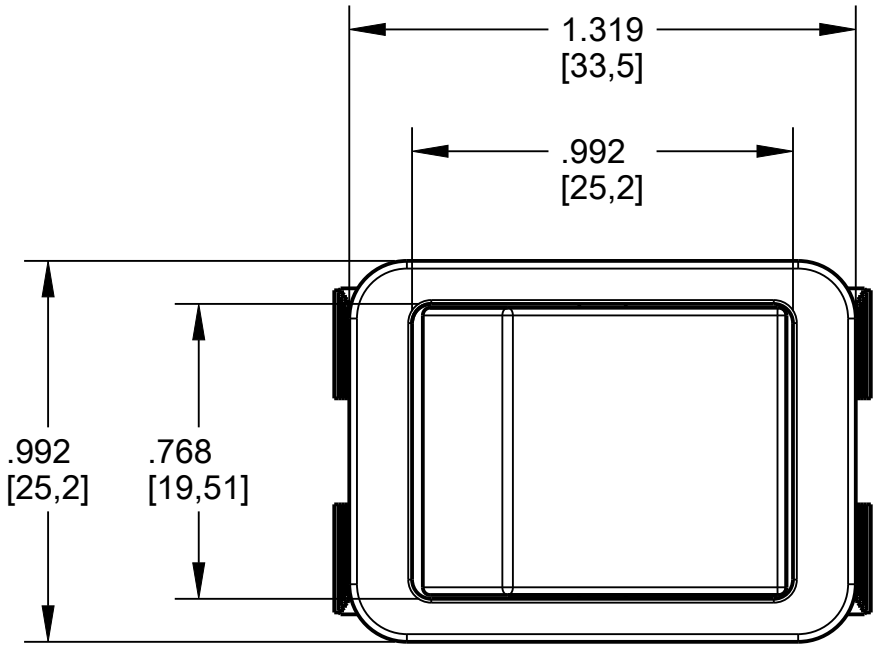


NOTES (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKER:

 16A 125/250VAC
 20A 125VAC
3/4HP 125/250VAC

  16(4)A 250V~T125/55
10(2)A 250V~T125/55 50E3
16(8)A 250V~T125/55




  16(4)A 125/250V~


DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MINUTE

INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.

INITIAL CONTACT RESISTANCE: 20m Ω (MAX.)

TERMINALS: .250 (6.3) WIDE X .031 (0.8) THICK.
HOLE $\varnothing$.067 (1.7); 6 PLACES.

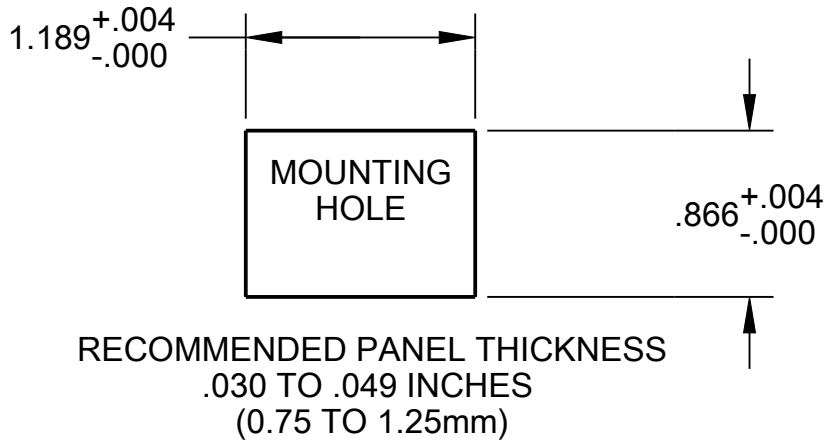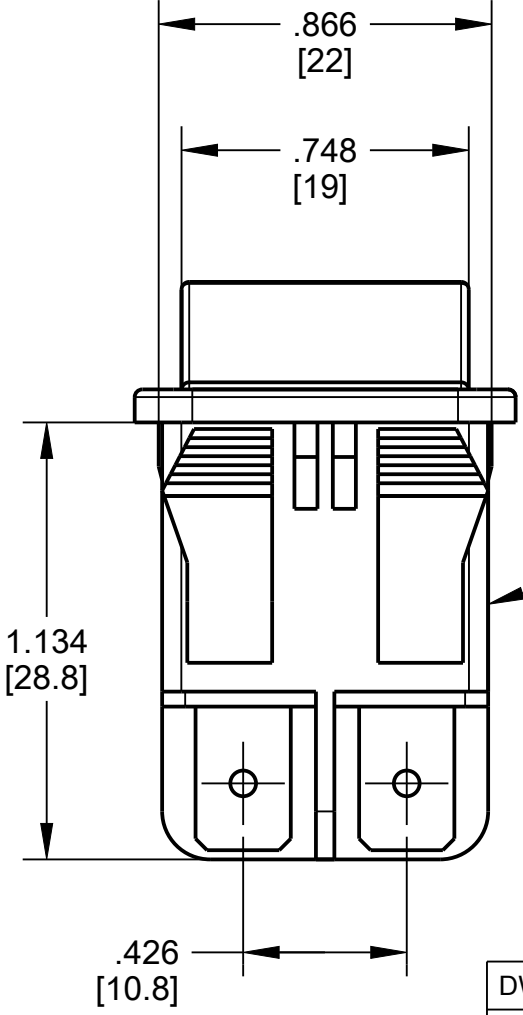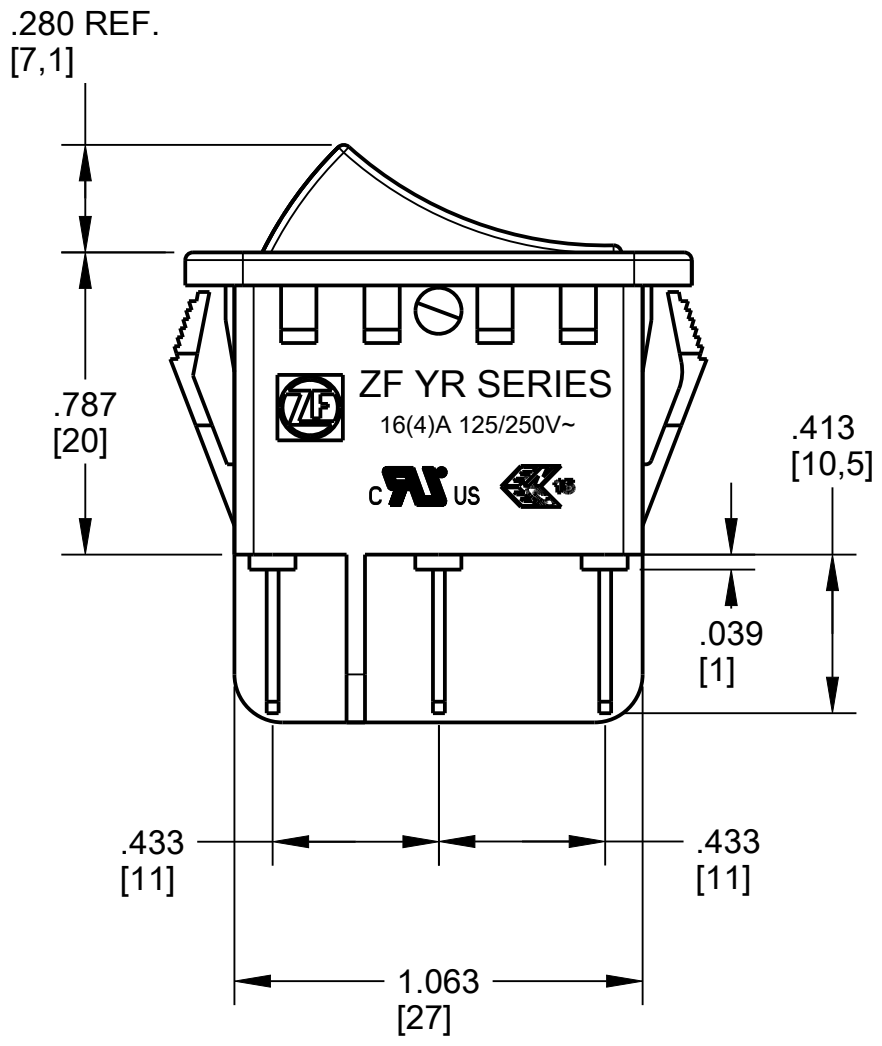

DWN: TLM
APVD: ELL
DATE: 13-Apr-11
THIRD ANGLE PROJECTION


**ZF Electronic Systems**

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. YRM33F2BBBNN

SCALE: 2:1 SH 1 OF 1

F		2024-05-16	ELL	TCH	PROJECT/ CSR
REV	ECO NO.	DATE	PREP	APVD	4000000138

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5.0°