

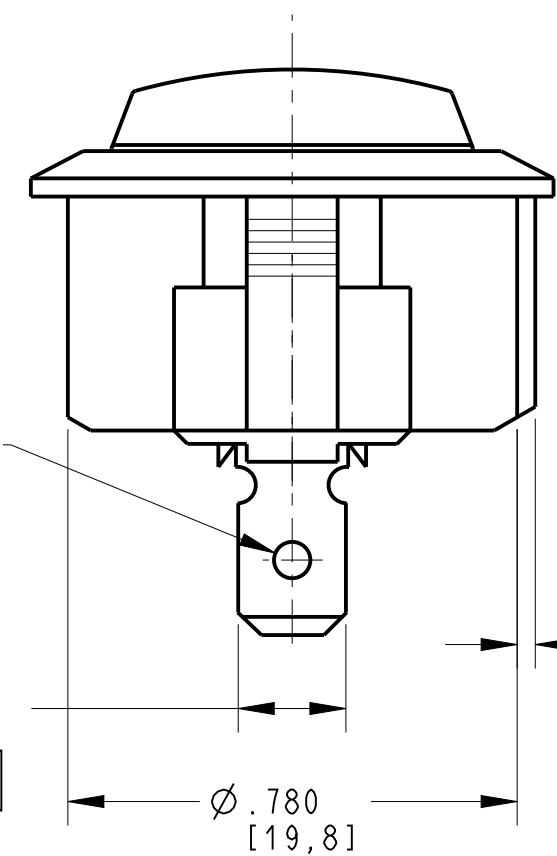
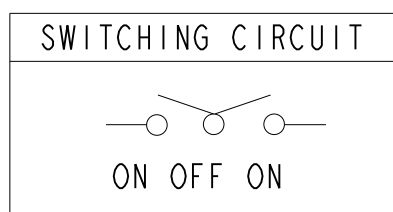
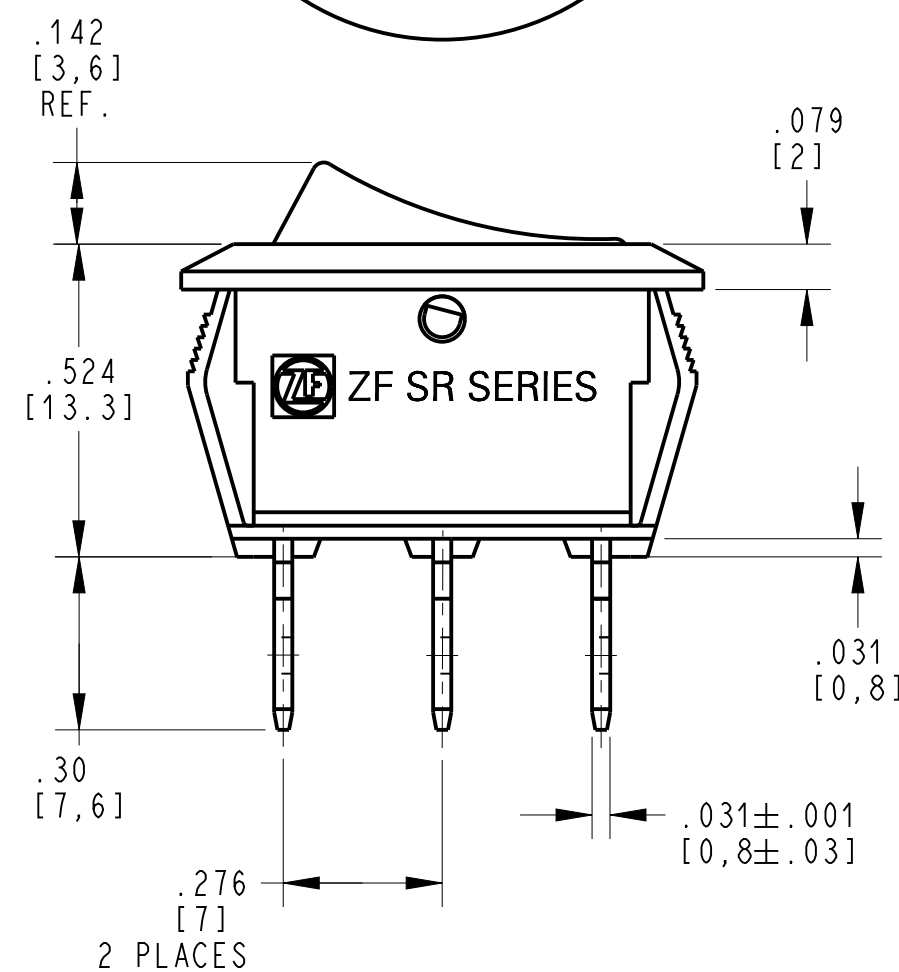


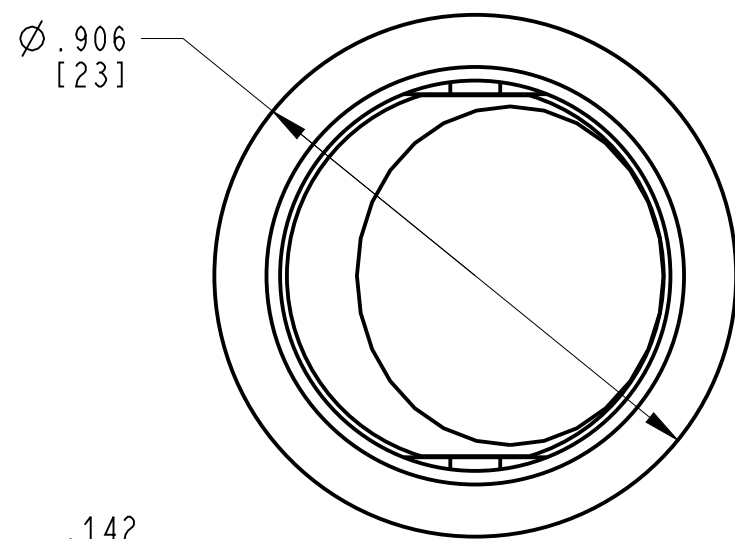

PANEL CUTOUT DIMENSION
FOR PANEL THICKNESS OF
INCHES (mm)
.039 TO .078 (1.0 to 2.0)

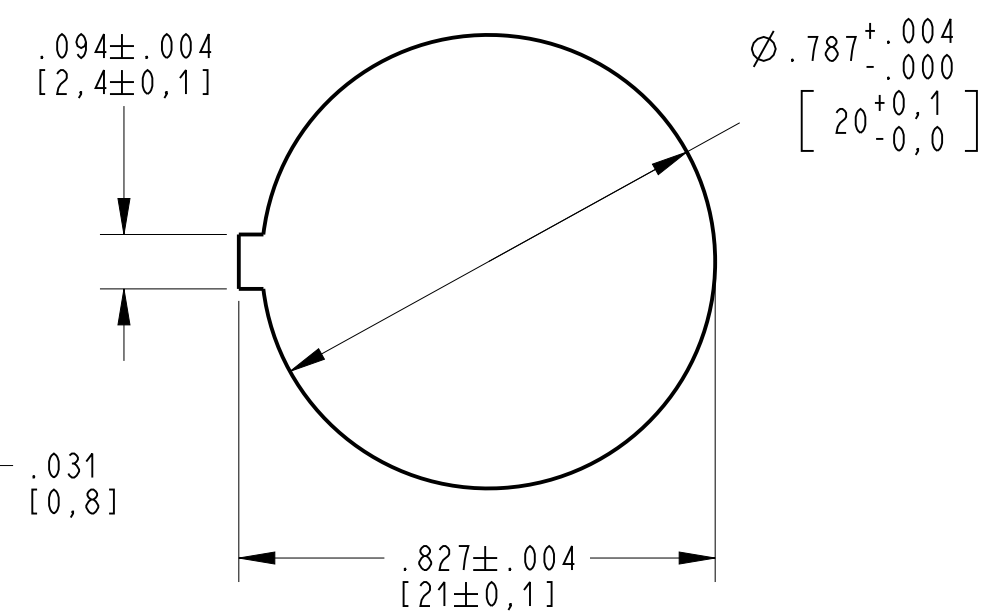

NOTES (UNLESS OTHERWISE SPECIFIED):

ELECTRICAL RATINGS TO BE MARKED ON ROCKER:
cULus 20A 125 VAC, 12A 250 VAC

cULus 16(8)A 125/250V~ T55


OPERATING FORCE: 500 GRAMS± 200 GRAMS.

DIELECTRIC VOLTAGE - WITHSTAND: 1,000 VAC FOR 1 MINUTE.
INSULATION RESISTANCE: DC 500V 100MΩ (MIN.).
CONTACT RESISTANCE: 20mΩ INITIAL (MAX.).

HOUSING AND ROCKER COLOR: BLACK
NO LEGEND

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER
THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.

DWN: TLM
APVD: ELL
DATE: 24-Nov-10
THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

G	Z000447767	07-Mar-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0°

B	ITEM NO.	SRJ24A3BBBNN
SCALE:	3.000	SH 1 OF 1