

NOTES (UNLESS OTHERWISE SPECIFIED):

1. \*SWITCH CHARACTERISTICS

REST POSITION	.380 MAX.
PRE-TRAVEL	.050 MAX.
OPERATING POSITION	.255 TO .315
OVER TRAVEL	.080 MIN.
MOVEMENT DIFF.	
EACH POLE	.015 MAX.
OPERATING FORCE grams	850 MAX.
RELEASE FORCE grams	170 MIN.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.


2. **UL**us ELECTRICAL RATING

15A, 125/250 VAC  
3/4 HP, 125 VAC;  
1-1/2 HP, 250 VAC;

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

4. TEMPERATURE RATING: -40°C TO 105°C


5. TERMINALS ARE .250 WIDE X .032 THICK AND TERMINAL HOLES ARE  $\phi .095$ . 6 PLACES.

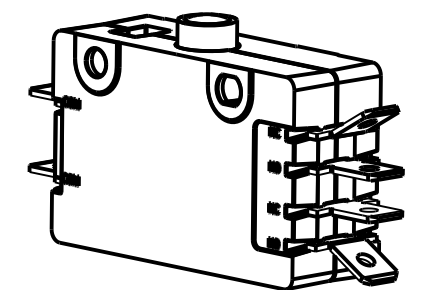

SCALE 1:1  
SHOWN NOT CLINCHED

DWN: TLM  
APVD: EL  
DATE: 24-Jul-12

THIRD ANGLE PROJECTION



PROJECT/ CSR  
4000000138

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm 0.02$	$\pm 0.015$	$\pm 5.0^\circ$



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. 0E19-00A0

SCALE: 2:1 SH 1 OF 1

C	Z000371636	25-Jul-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD