

NOTES (UNLESS OTHERWISE SPECIFIED):

- SWITCH CHARACTERISTICS
 REST POSITION .750 MAX.
 PRE-TRAVEL .050 MAX.
 OPERATING POSITION .640 TO .700
 OVER TRAVEL .080 MIN.
 MOVEMENT DIFF. EACH POLE .015 MAX.
 OPERATING FORCE grams 850 MAX.
 RELEASE FORCE grams 170 MIN.


ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.

- us** ELECTRICAL RATING
 15A, 125/250 VAC
 3/4 HP, 125 VAC;
 1-1/2 HP, 250 VAC;



- TERMINALS ARE
 .250 WIDTH x .032 THICKNESS.

- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

- TEMPERATURE RATING: -40°C TO +105°C

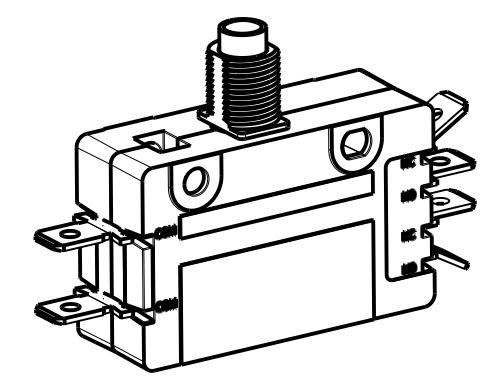

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: C. RAMOS		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION	
APVD: N. DELGADO			
DATE: 12-Nov-07			
THIRD ANGLE PROJECTION			
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED	
DWG UNITS		X.XX	X.XXX
INCHES		± 0.02	± 0.015
		ANGLES ± 5.0 °	
REV		ITEM NO. 0E19-00J0	
ECO NO.		SCALE: 2:1 SH 1 OF 1	
DATE			
PREP			
APVD			

D	Z000458181	24-May-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

ORIGINAL ON PRO/E