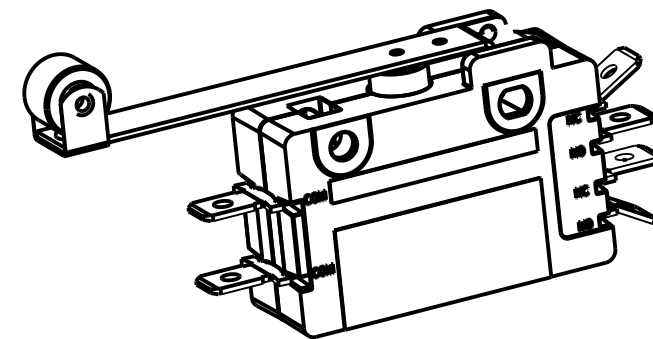




NOTES (UNLESS OTHERWISE SPECIFIED):

1. *SWITCH CHARACTERISTICS
 PRE-TRAVEL .250 MAX.
 OPERATING POSITION .656 TO .780
 OVER TRAVEL .187 MIN.
 MOVEMENT DIFF. EACH POLE .093 MAX.
 OPERATING FORCE grams 212 MAX.
 ALL CHARACTERISTICS TAKEN AT ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
2. **CAFUS** ELECTRICAL RATING
 15A, 125/250 VAC
 3/4 HP, 125 VAC;
 1-1/2 HP, 250 VAC;
3. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
4. TEMPERATURE RATING: -40°C TO 105°C
5. TERMINALS ARE .250 WIDE X .032 THICK.



SHOWN IN A NON CLINCHED STATE
 SCALE 1.000

DWN: JML								ZF Electronic Systems	
APVD: CJD									
DATE: 16-Apr-97						PLEASANT PRAIRIE, WISCONSIN U.S.A.			
THIRD ANGLE PROJECTION						NAME / DESCRIPTION		SPECIFICATION DRAWING	
									
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED				B	ITEM NO. 0E19-00K0		
		DWG UNITS	X.XX	X.XXX	ANGLES				
		INCHES	± 0.02	± 0.015	± 5.0 °	SCALE: 2.000		SH 1 OF 1	