

NOTES (UNLESS OTHERWISE SPECIFIED):


- *SWITCH CHARACTERISTICS

PRE-TRAVEL	.400 MAX.
OPERATING POSITION	.219 TO .343
OVER TRAVEL	.187 MIN.
MOVEMENT DIFF. EACH POLE	.140 MAX.
OPERATING FORCE grams	128 MAX.
RELEASE FORCE grams	15 MIN.



ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.

- cus** ELECTRICAL RATING

15A, 125/250 VAC
3/4 HP, 125 VAC;
1-1/2 HP, 250 VAC;
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
- TEMPERATURE RATING: -40°C TO 105°C
- TERMINALS ARE .250 WIDE X .032 THICK.

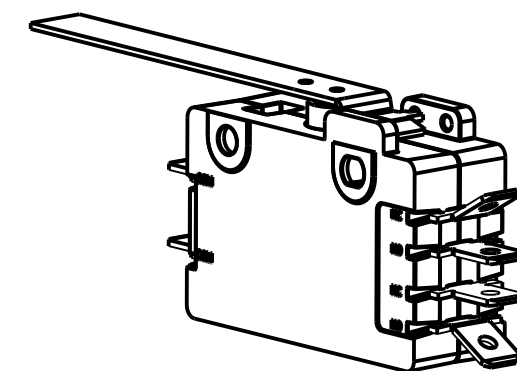

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: TLM		<div></div> <div>ZF Electronic Systems</div> <div>11200 88th AVE. PLEASANT PRAIRIE, WI 53158</div> <div>NAME / DESCRIPTION</div> <div>SPECIFICATION DRAWING</div>			
APVD: ELL					
DATE: 01-May-12					
THIRD ANGLE PROJECTION					
<div></div>					
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED			
4000000138		DWG UNITS	X.XX	X.XXX	ANGLES
		INCHES	± 0.02	± 0.015	± 5.0 °
		B ITEM NO. 0E19-50H0			
		SCALE: 2:1		SH 1 OF 1	