



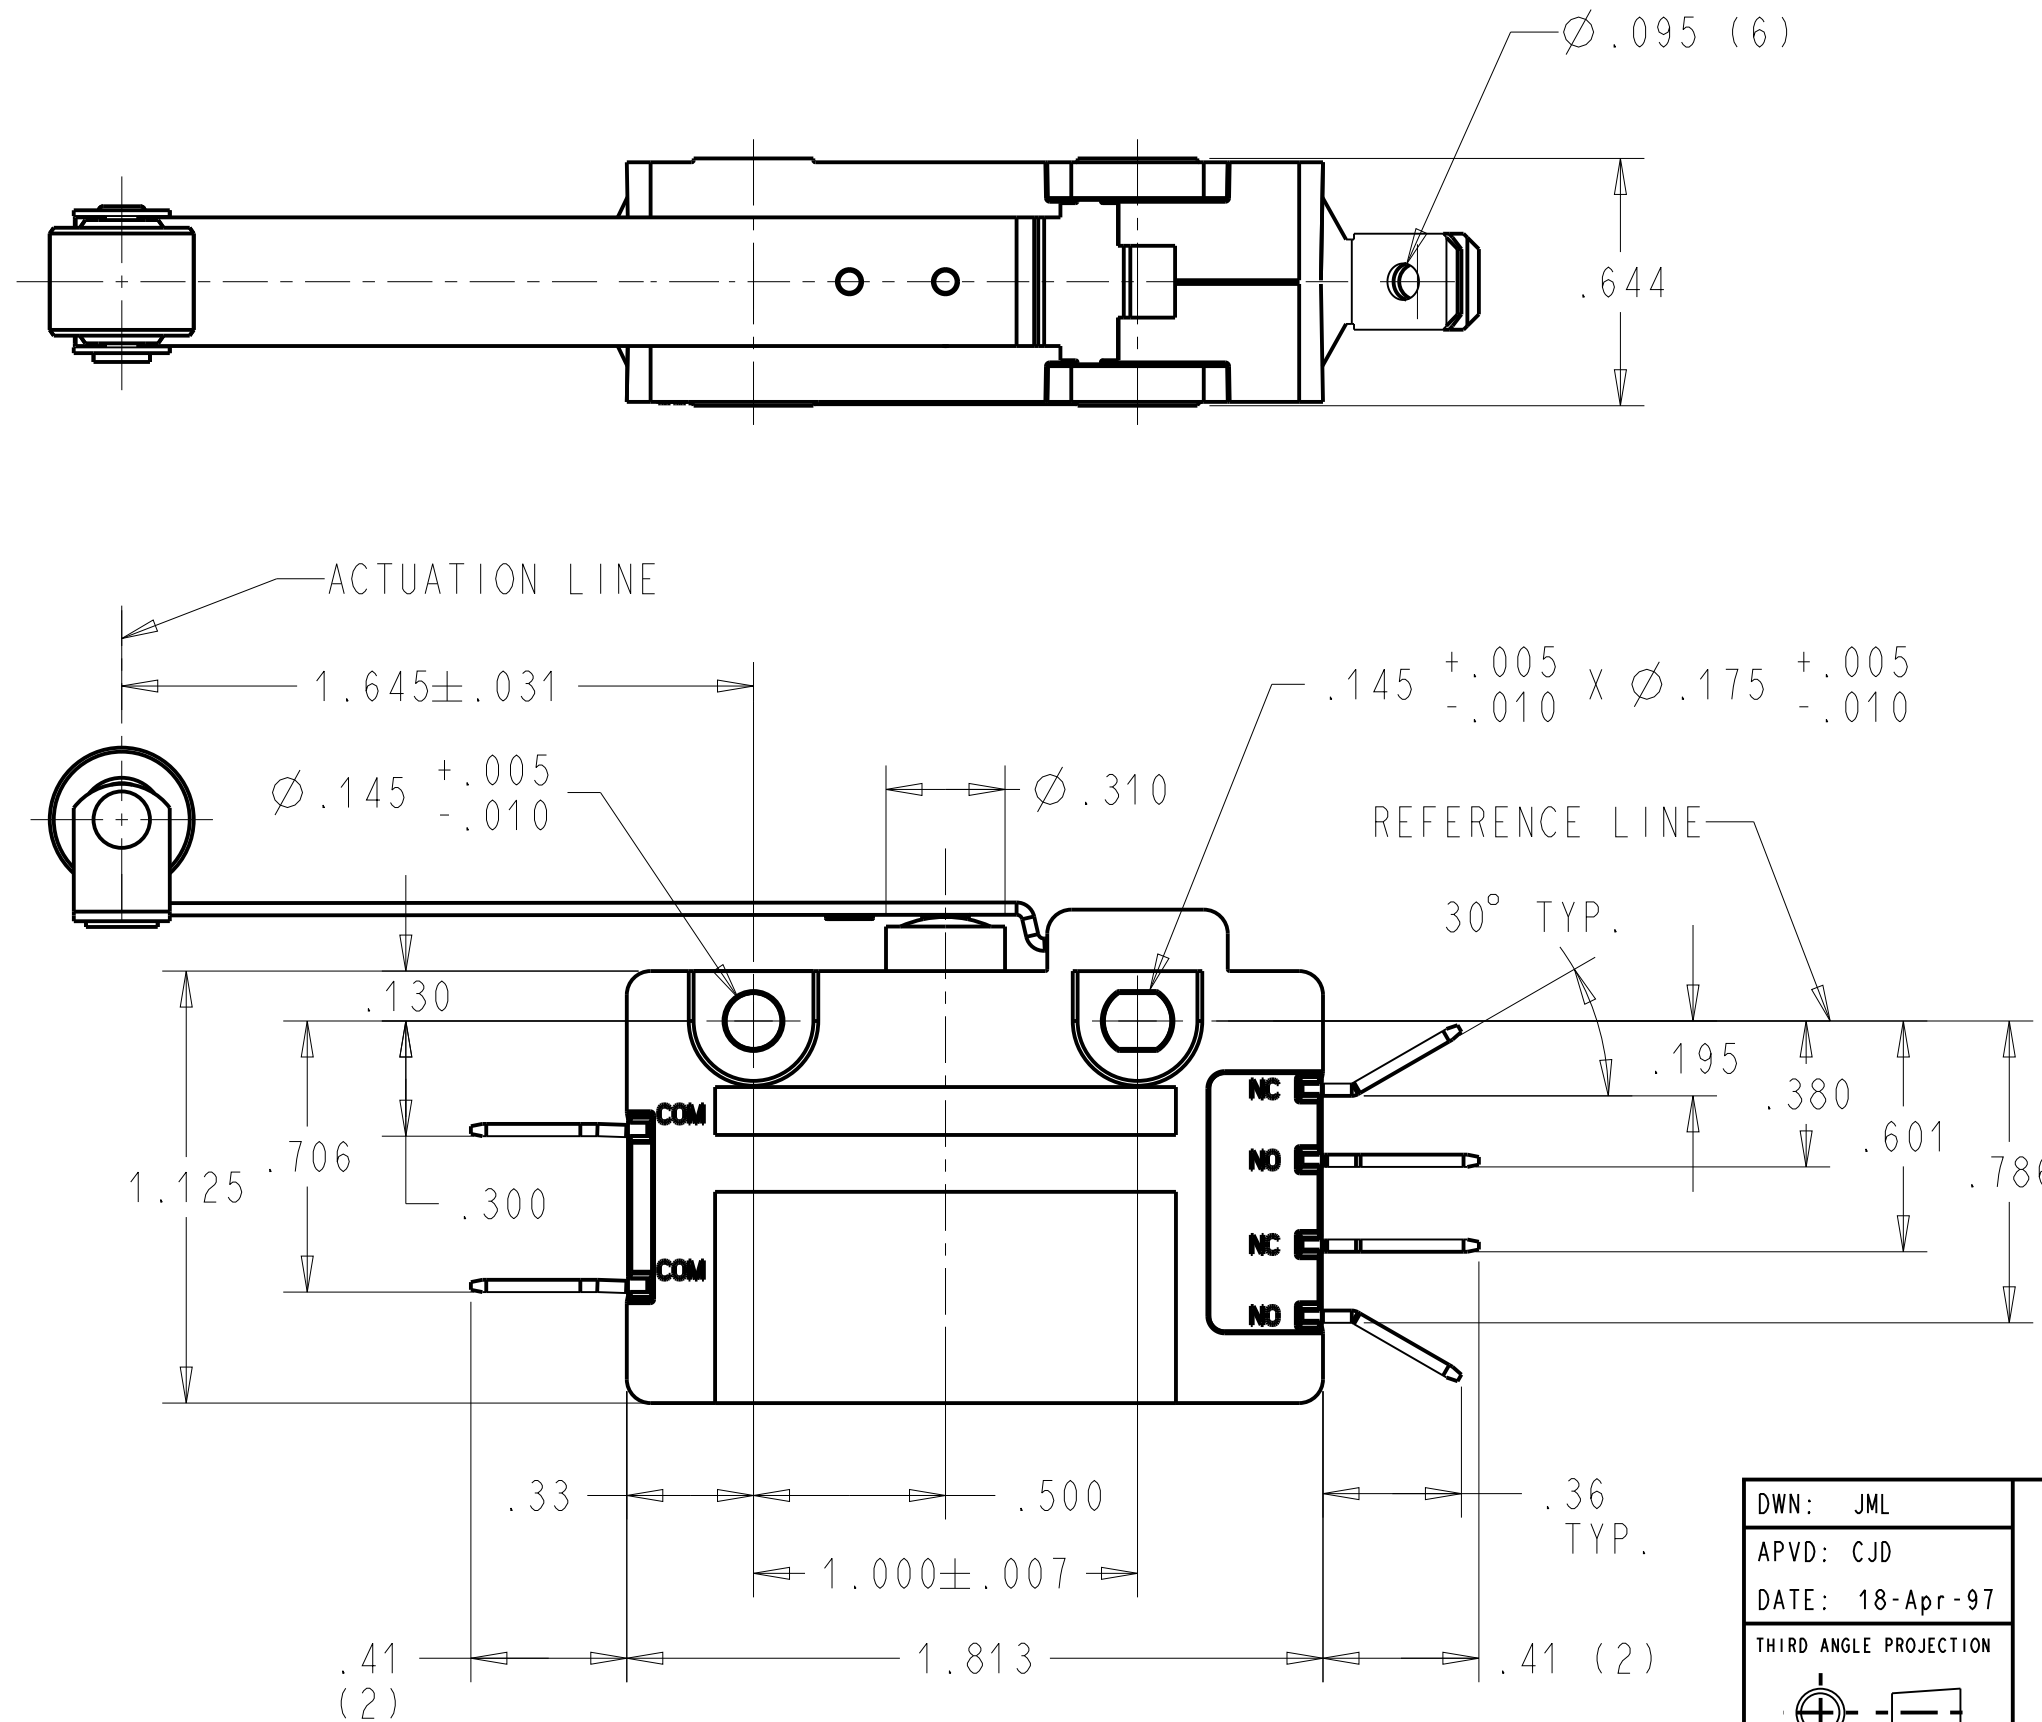


- NOTES (UNLESS OTHERWISE SPECIFIED):
- *SWITCH CHARACTERISTICS
 PRE-TRAVEL .312 MAX.
 OPERATING POSITION .625 TO .749
 OVER TRAVEL .187 MIN.
 MOVEMENT DIFF.
 EACH POLE .140 MAX.
 OPERATING FORCE grams 150 MAX.
 RELEASE FORCE grams 15 MIN.
 - ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
 -  ELECTRICAL RATING
 15A, 125/250 VAC
 3/4 HP, 125 VAC;
 1-1/2 HP, 250 VAC;
 - RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
 - TEMPERATURE RATING: -40°C TO 105°C
 - TERMINALS ARE .250 WIDE X .032 THICK.

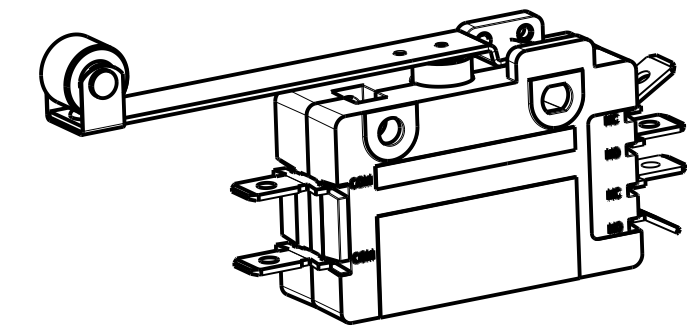

SHOWN IN A NON CLINCHED STATE
 SCALE 1.000

E	Z000458181	24-May-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: JML
APVD: CJD
DATE: 18-Apr-97
THIRD ANGLE PROJECTION

PROJECT/ CSR

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	$\pm 5.0^\circ$

		ZF Electronic Systems	
PLEASANT PRAIRIE, WISCONSIN U.S.A.		NAME / DESCRIPTION	
SPECIFICATION DRAWING		ITEM NO. OE19-50K0	
SCALE: 2.000		SH 1 OF 1	