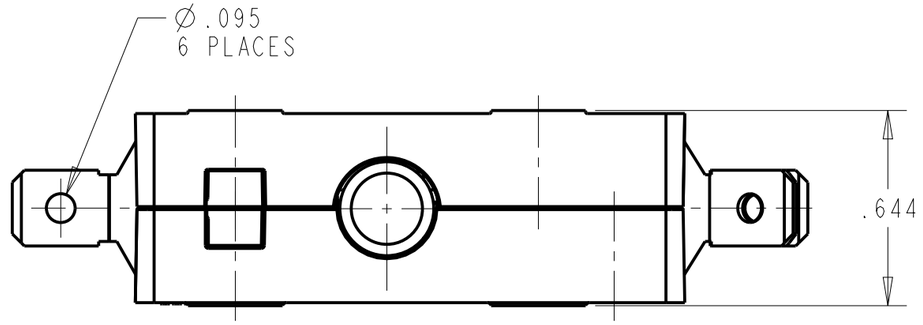

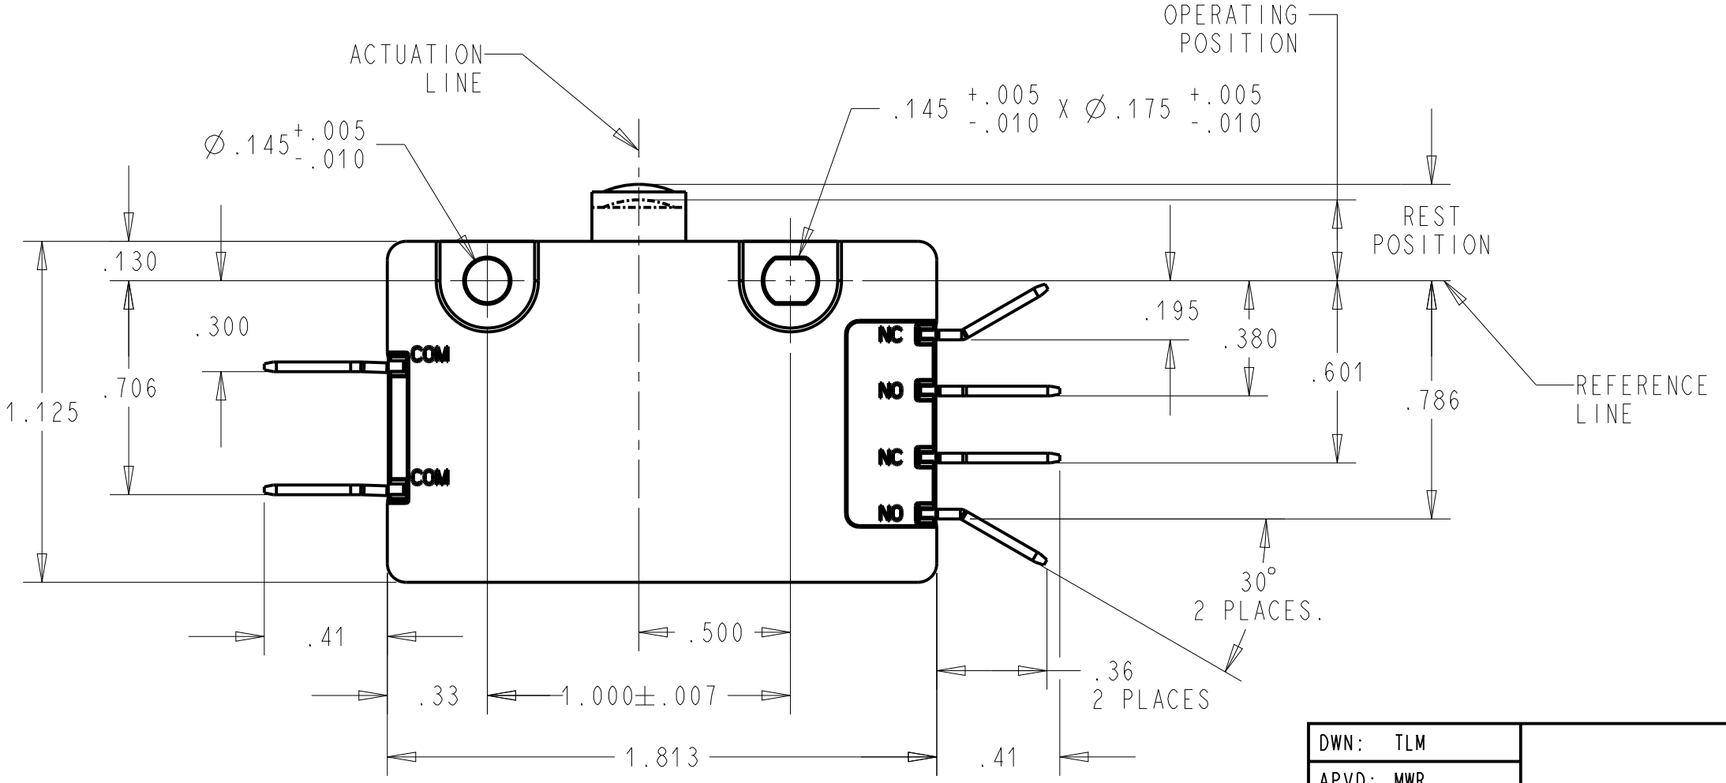

NOTES (UNLESS OTHERWISE SPECIFIED):

1. *SWITCH CHARACTERISTICS

PRE-TRAVEL	.100 MAX.
OPERATING POSITION	.218 TO .278
OVER TRAVEL	.050 MIN.
MOVEMENT DIFF. EACH POLE	.015 MAX.
OPERATING FORCE grams	1280 MAX.
RELEASE FORCE grams	170 MIN.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.

2. c US ELECTRICAL RATING
   20A, 125/250 VAC;
   1 H.P. 125 VAC;
   2 H.P. 250 VAC;

3. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

4. TEMPERATURE RATING: -40°C TO 105°C

5. TERMINALS ARE .250 WIDE X .032 THICK.

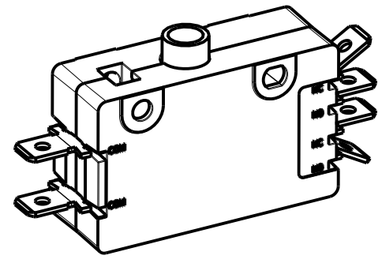

SHOWN IN A NON CLINCHED STATE
SCALE 1.000

ORIGINAL ON PRO/E

REV	ECO NO.	DATE	PREP	APVD
C	Z000371638	25-Jul-16	JPD	ELL

DWN: TLM
APVD: MWR
DATE: 07-May-03
THIRD ANGLE PROJECTION
PROJECT/ CSR 4000000138

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	± 5.0 °

ZF Electronic Systems
11200 88th AVE. PLEASANT PRAIRIE, WI 53158
NAME / DESCRIPTION
SPEC DRAWING
B ITEM NO. 0E20-00A0
SCALE: 2.000 SH 1 OF 1