
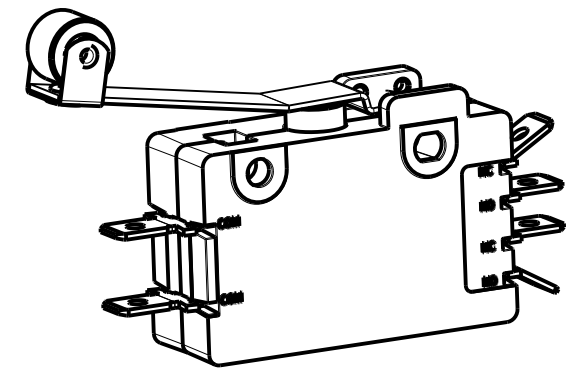


NOTES (UNLESS OTHERWISE SPECIFIED):



- | | |
|---------------------------|--------------|
| 1.*SWITCH CHARACTERISTICS | |
| REST POSITION | 1.373 MAX. |
| PRE-TRAVEL | .525 MAX. |
| OPERATING POSITION | .766 TO .890 |
| OVER TRAVEL | .146 MIN. |
| MOVEMENT DIFF. | |
| EACH POLE | .075 MAX. |
| OPERATING FORCE grams | 311 MAX. |
| RELEASE FORCE grams | 29 MIN. |

ALL CHARACTERISTICS ARE TAKEN AT THE
ACTUATION LINE AND MEASURED FROM
THE REFERENCE LINE.

2.  **UL** ELECTRICAL RATING
20 AMPS 125/250 VAC
1 H.P. 125 VAC
2 H.P. 250 VAC
3. TERMINALS ARE .250 WIDTH x .032 THICKNESS.
4. RECOGNIZED TO U.S. AND CANADIAN
REQUIREMENTS UNDER THE COMPONENT
RECOGNITION PROGRAM OF UNDERWRITERS
LABORATORIES, INC.
5. TEMPERATURE RATING -40°C TO +105°C



SHOWN IN A NON CLINCHED STATE
SCALE 1.000

DWN: KAA					 ZF Electronic Systems	
APVD: CJD						
DATE: 12-Dec-96					11200 88th AVE. PLEASANT PRAIRIE, WI 53158	
THIRD ANGLE PROJECTION					NAME / DESCRIPTION	
		SPECIFICATION DRAWING			B ITEM NO. 0E20-50K0	
PROJECT/ CSR						
4000000138		TOLERANCE UNLESS SPECIFIED			SCALE: 2.000 SH 1 OF 1	
DWG UNITS	X.XX	X.XXX	ANGLES			
INCHES	± 0.02	± 0.015	± 5.0 °			